
**PARKING
VITRIFIED
TILES**

400x

400MM


40x 40cm

| PARKING VITRIFIED TILES





.....

All about an adventurous tile which has immense toughness with great look that complements every area.



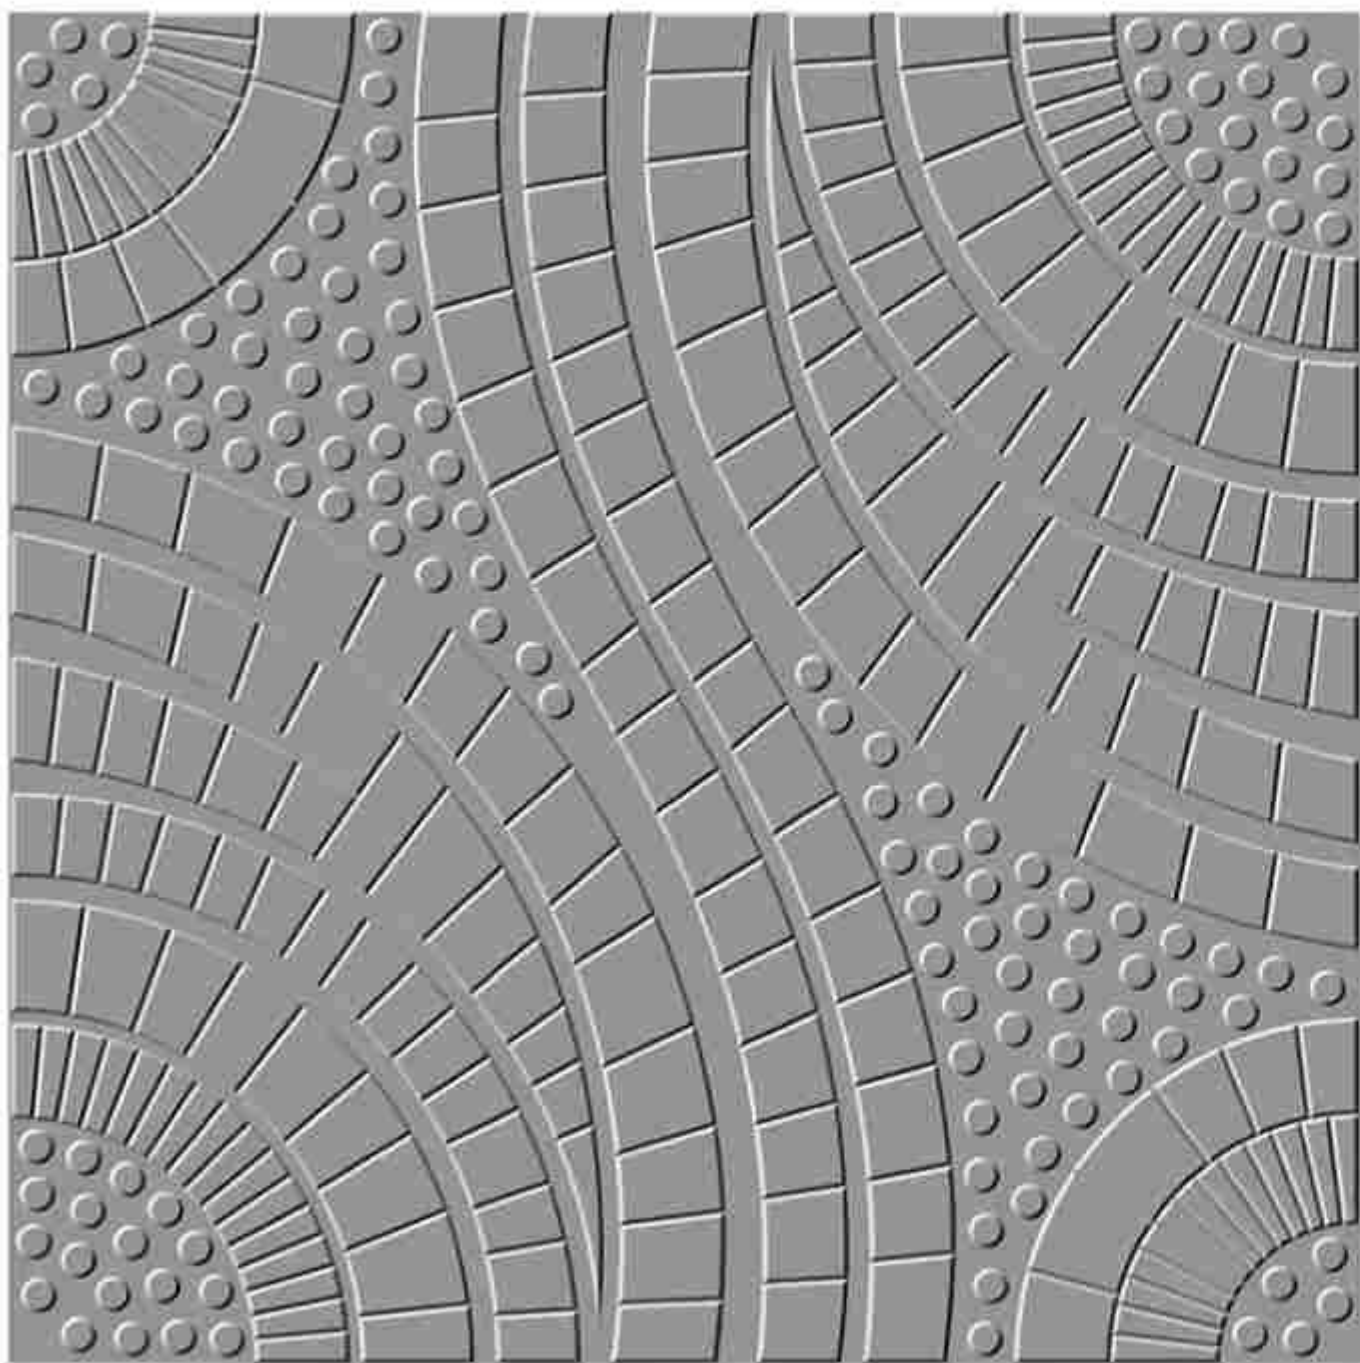

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

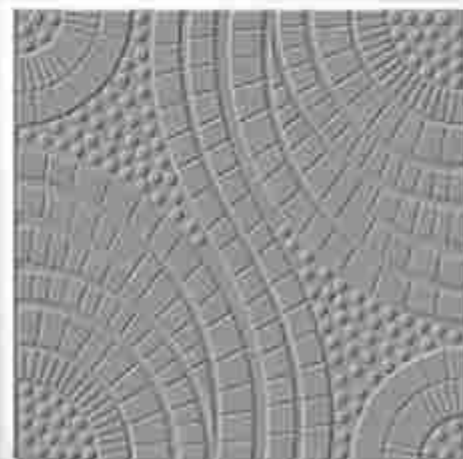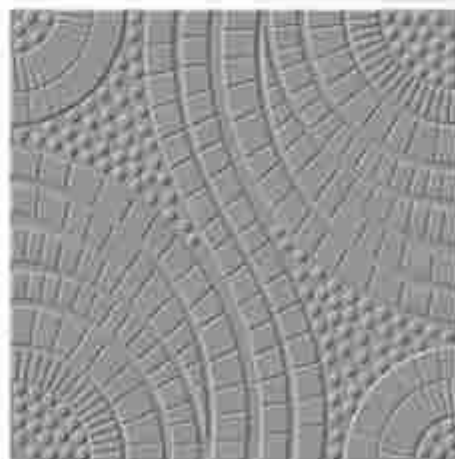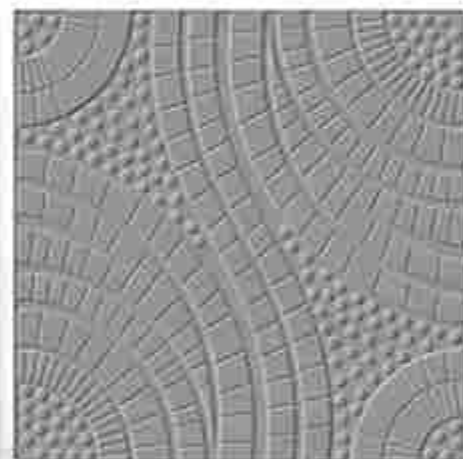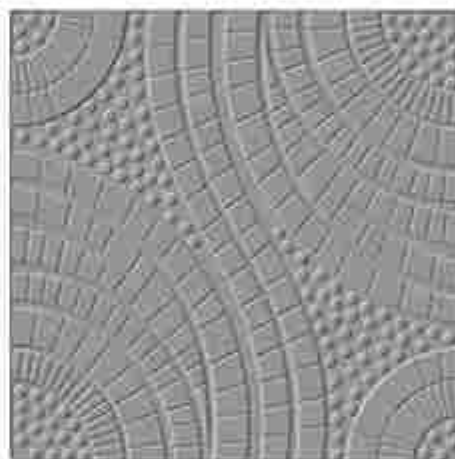

Applications



Residential



Commercial



Malls &
Restaurants




Public
Area



1901

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

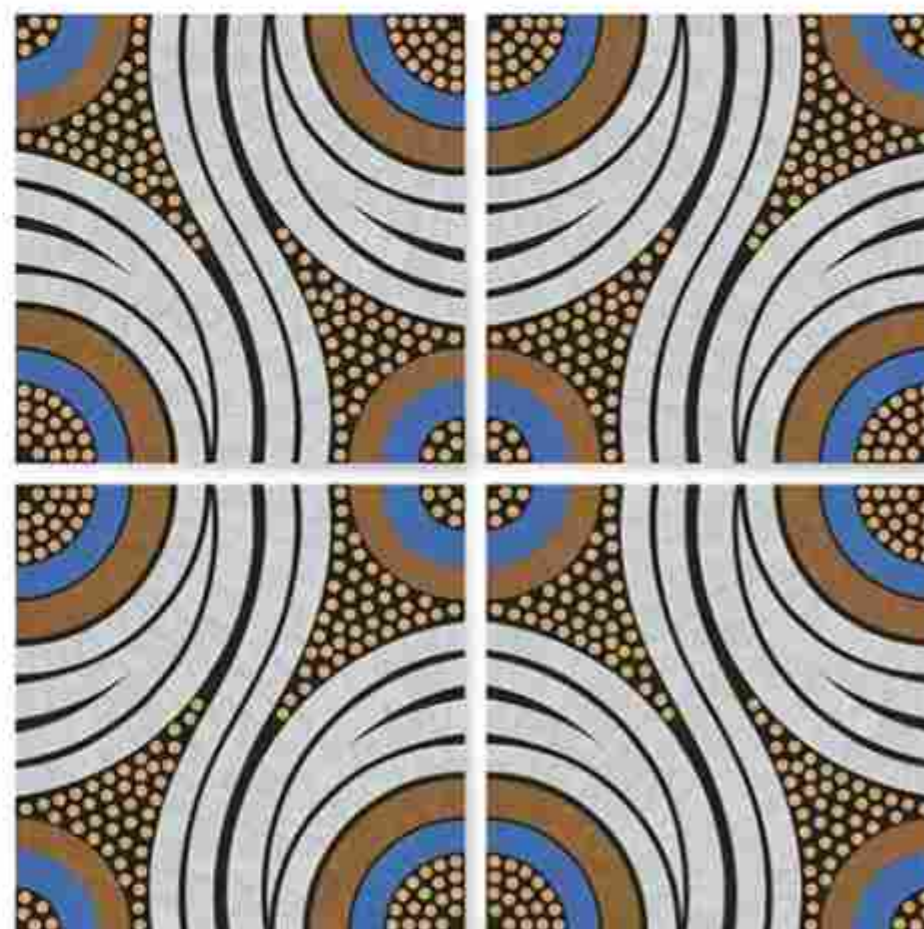

Applications








1902


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

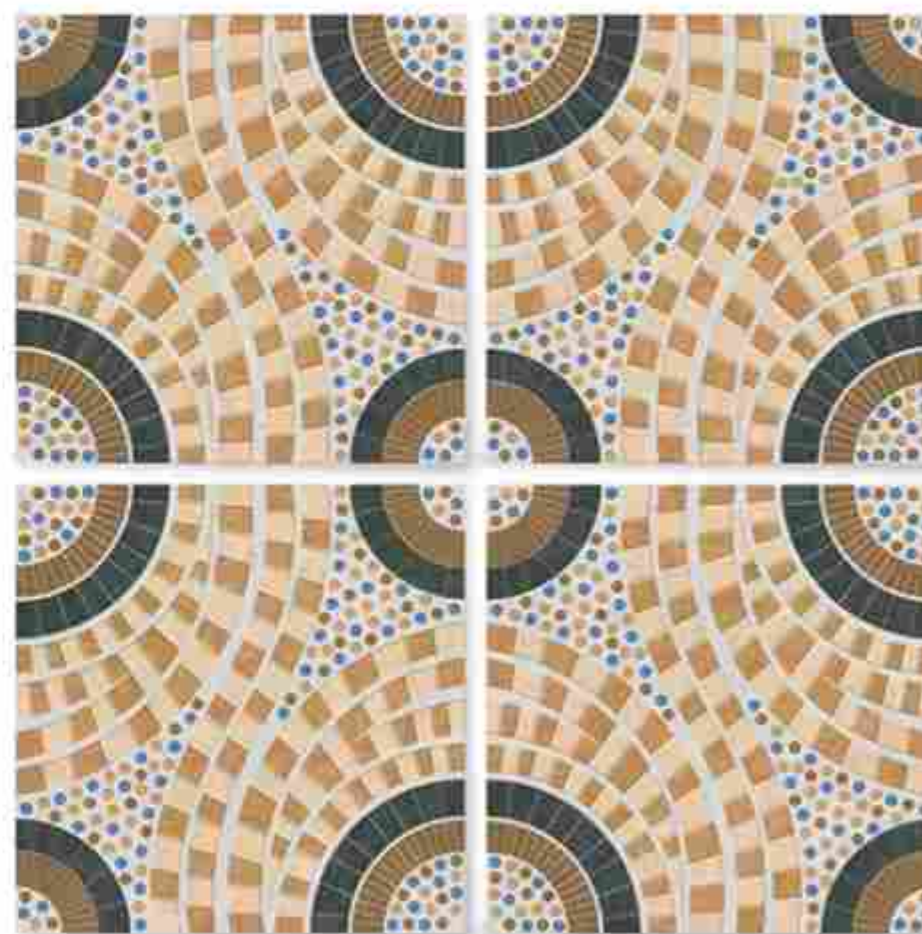

Applications





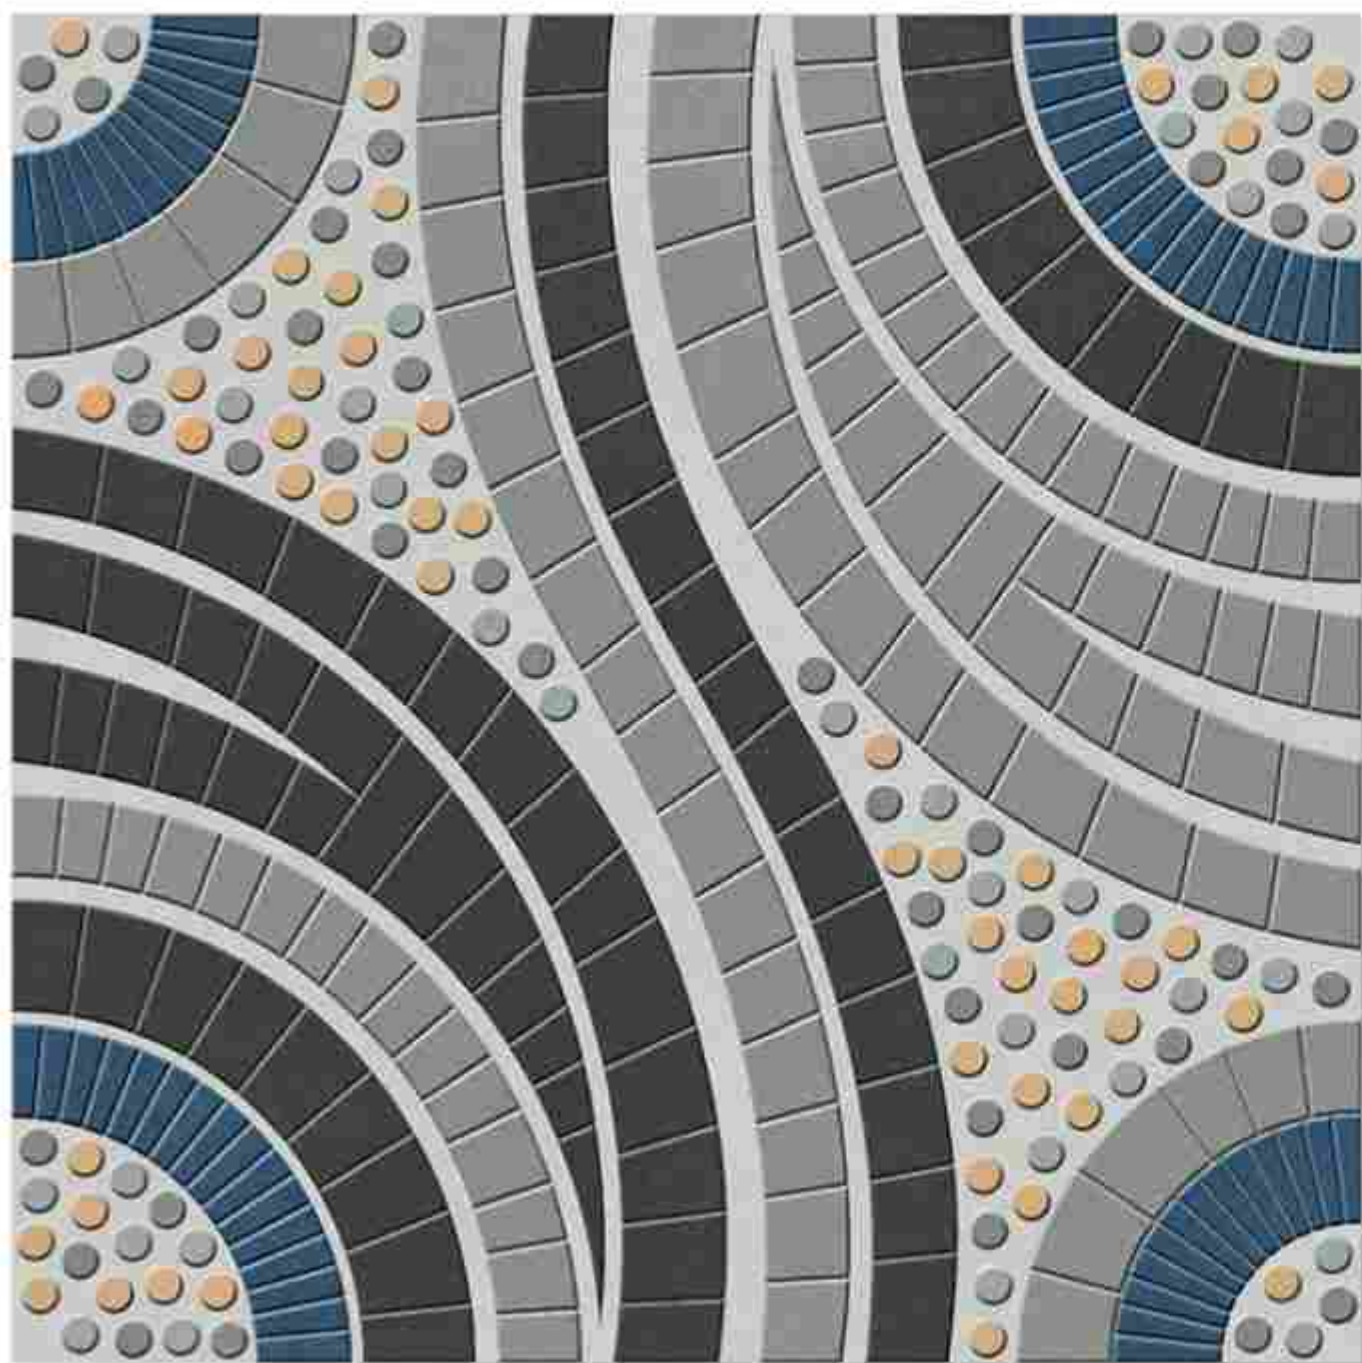

1903

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








1904


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

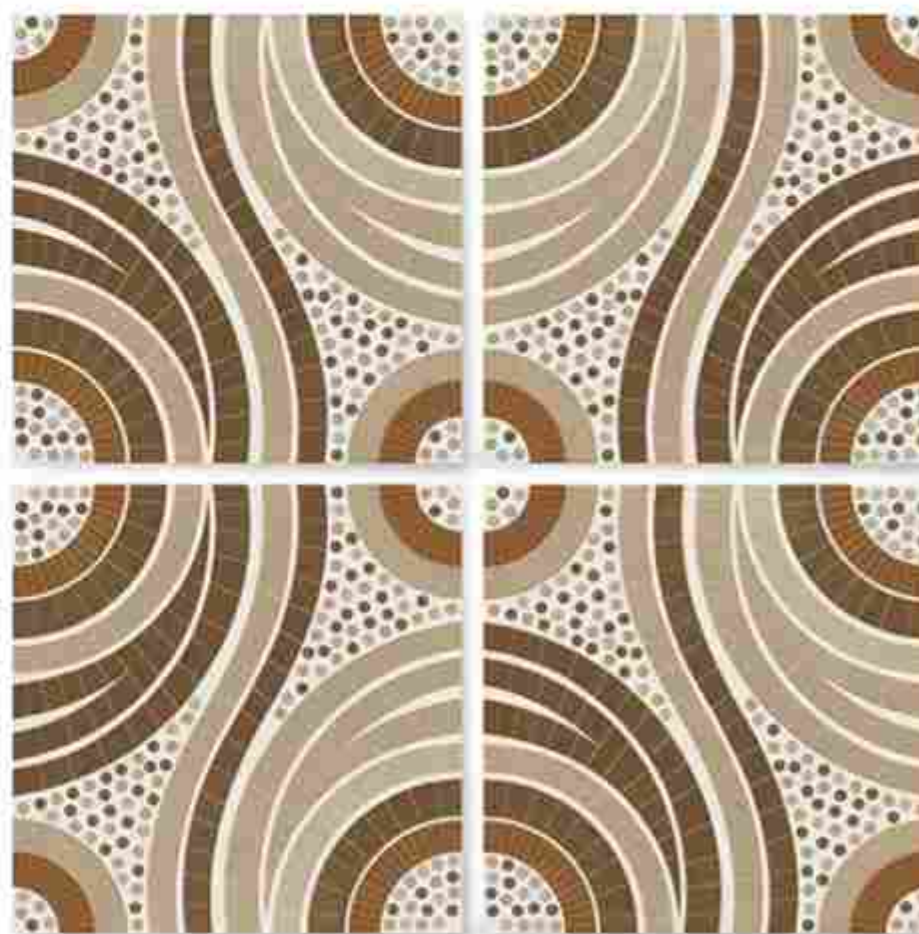

Applications






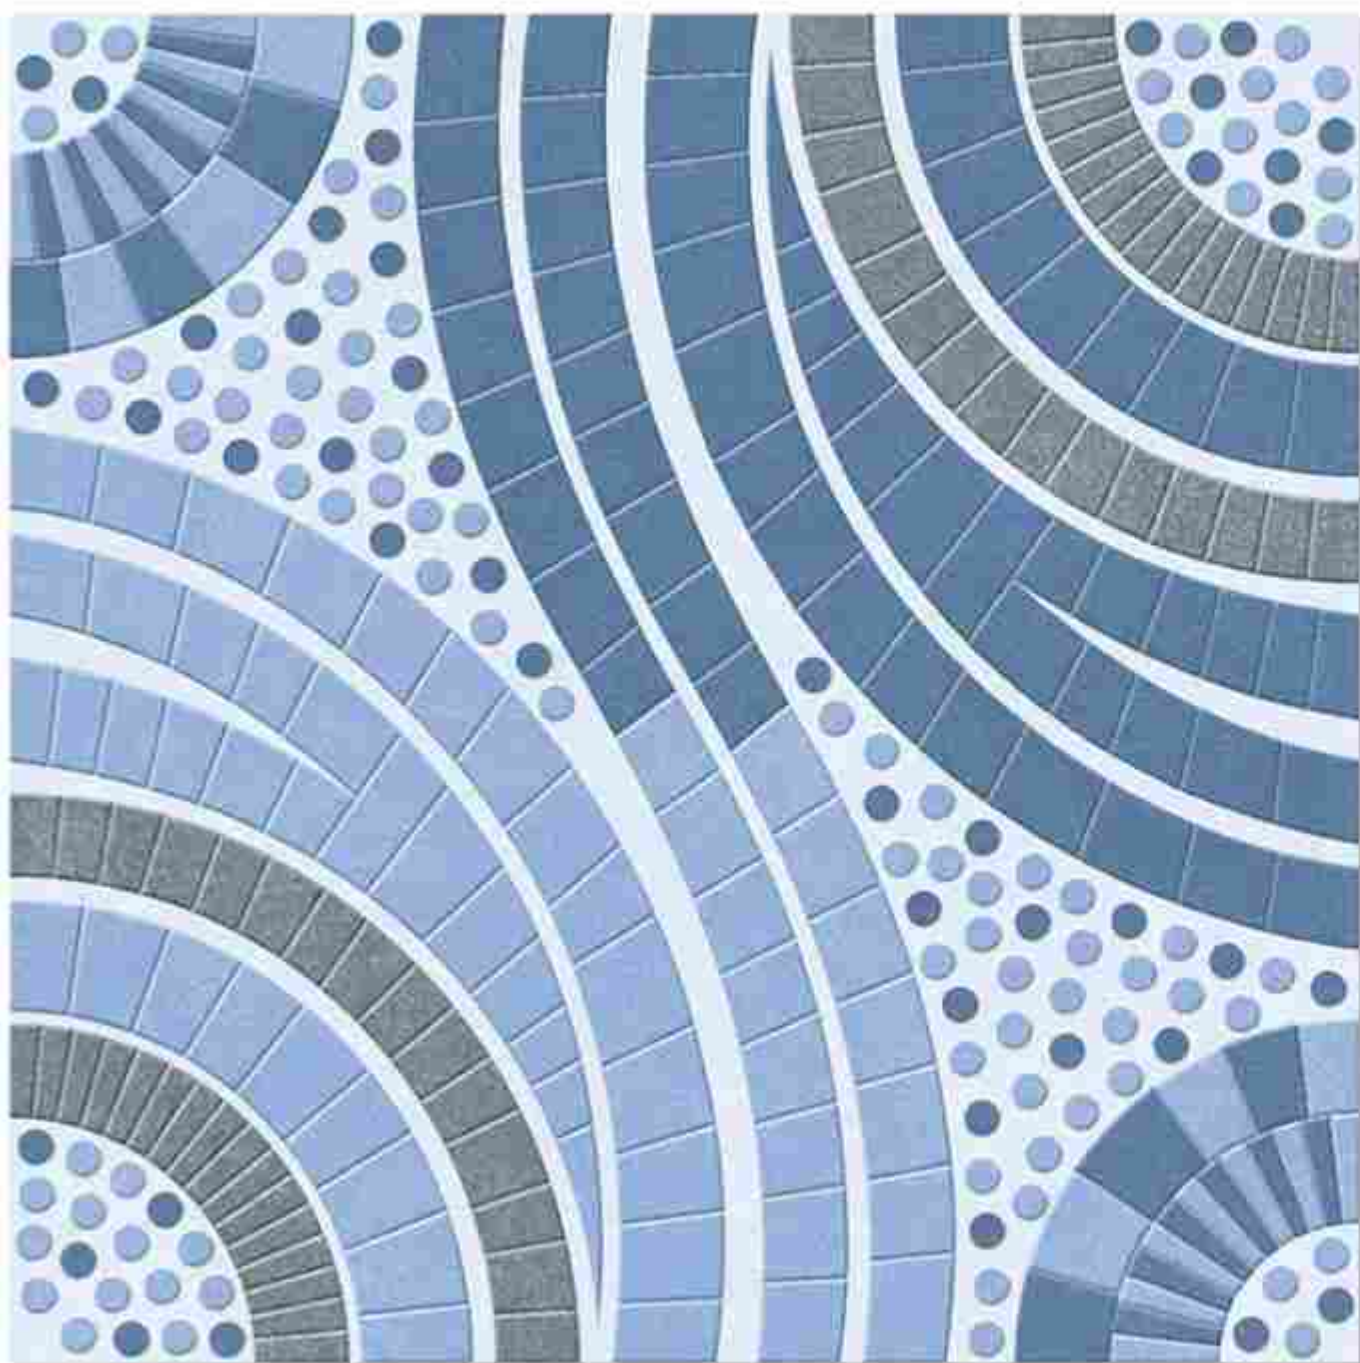

1905


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

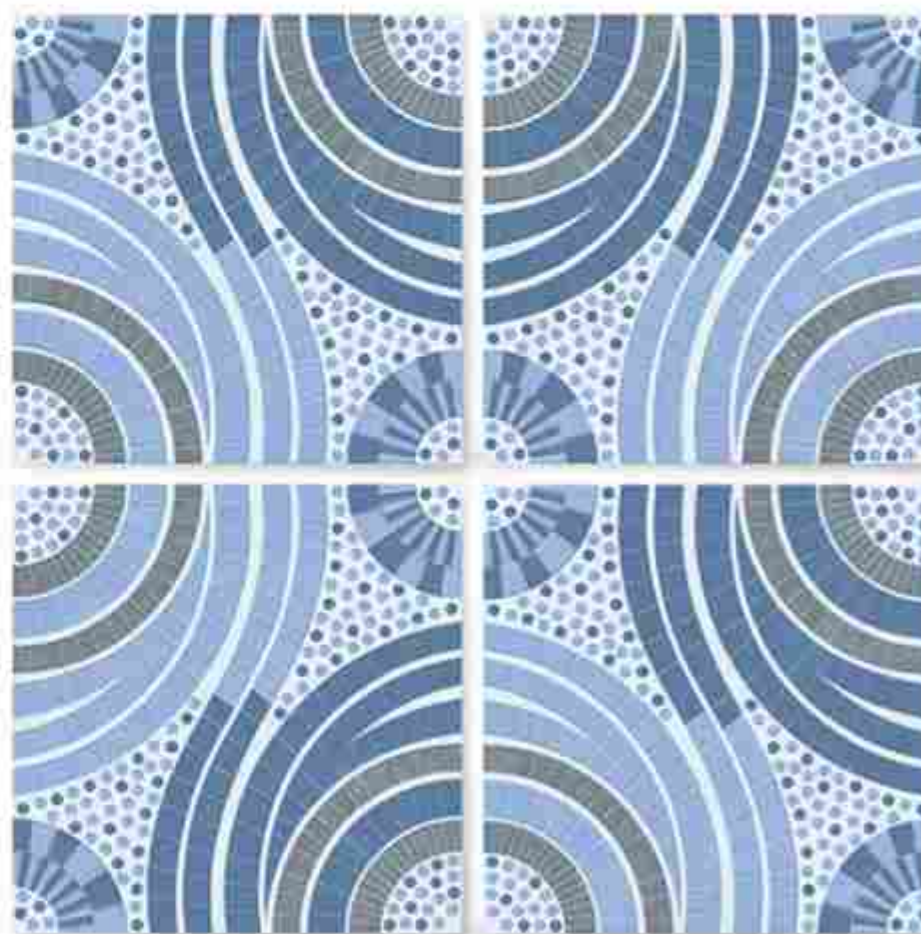

Applications






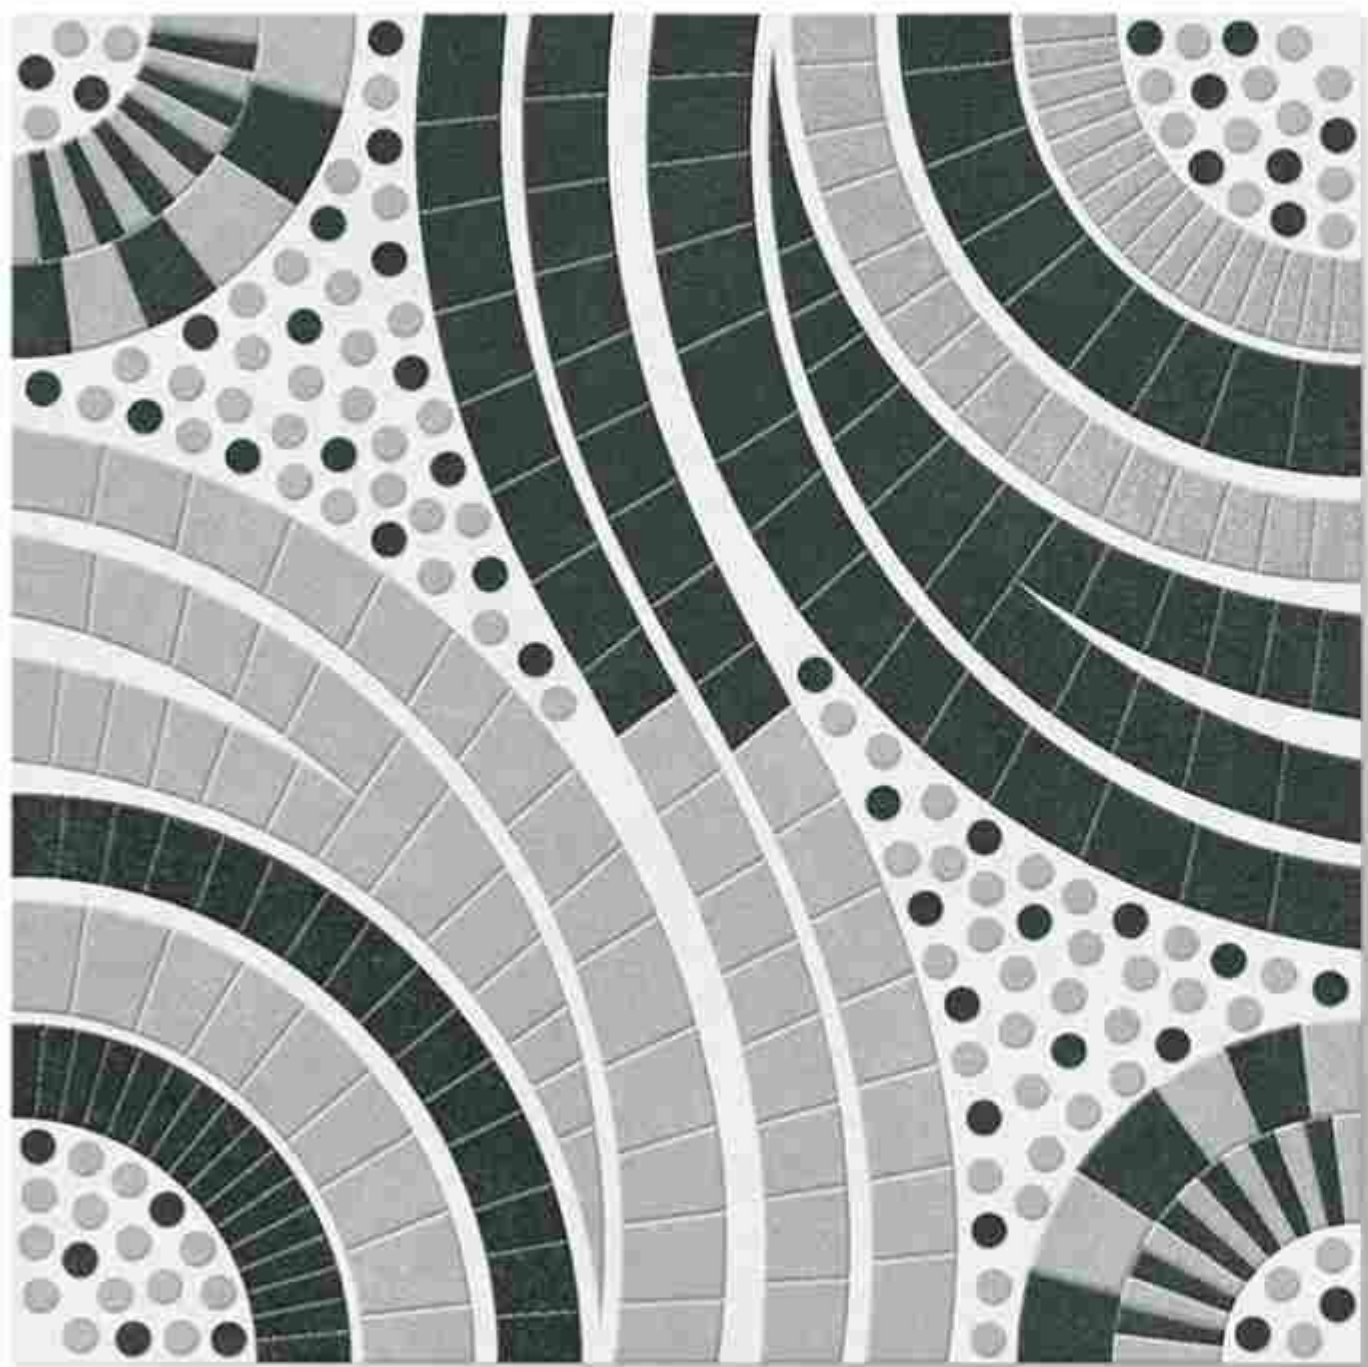

1906


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

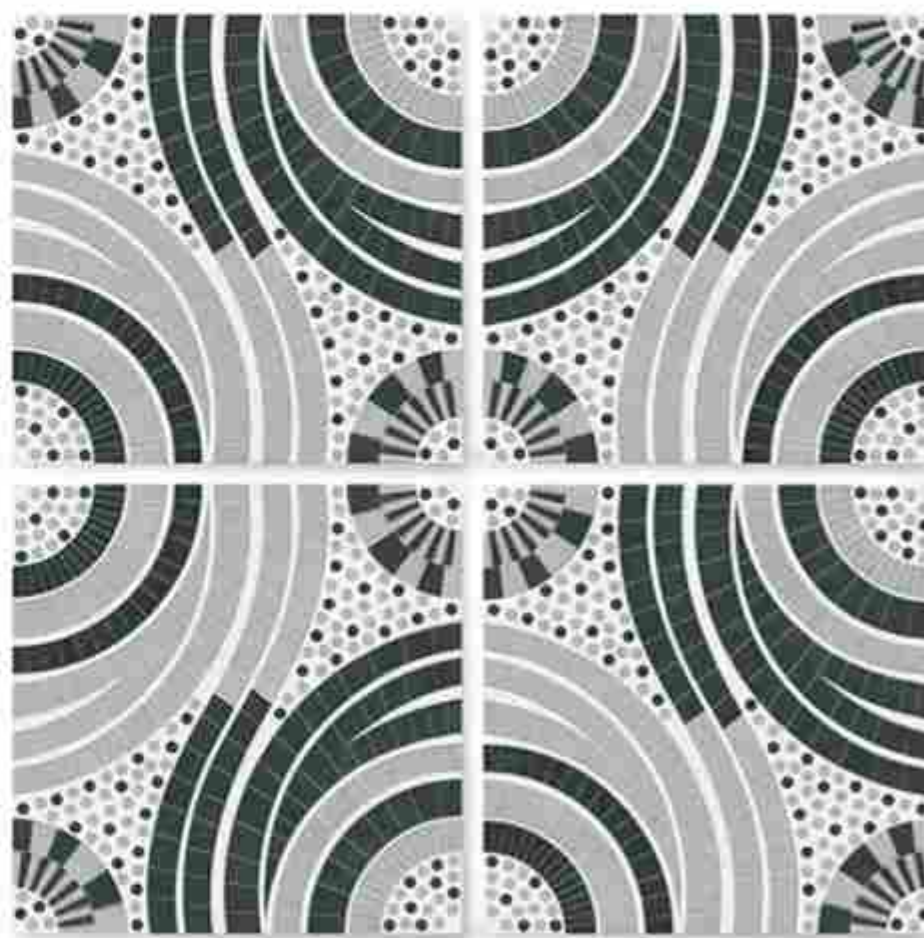

Applications






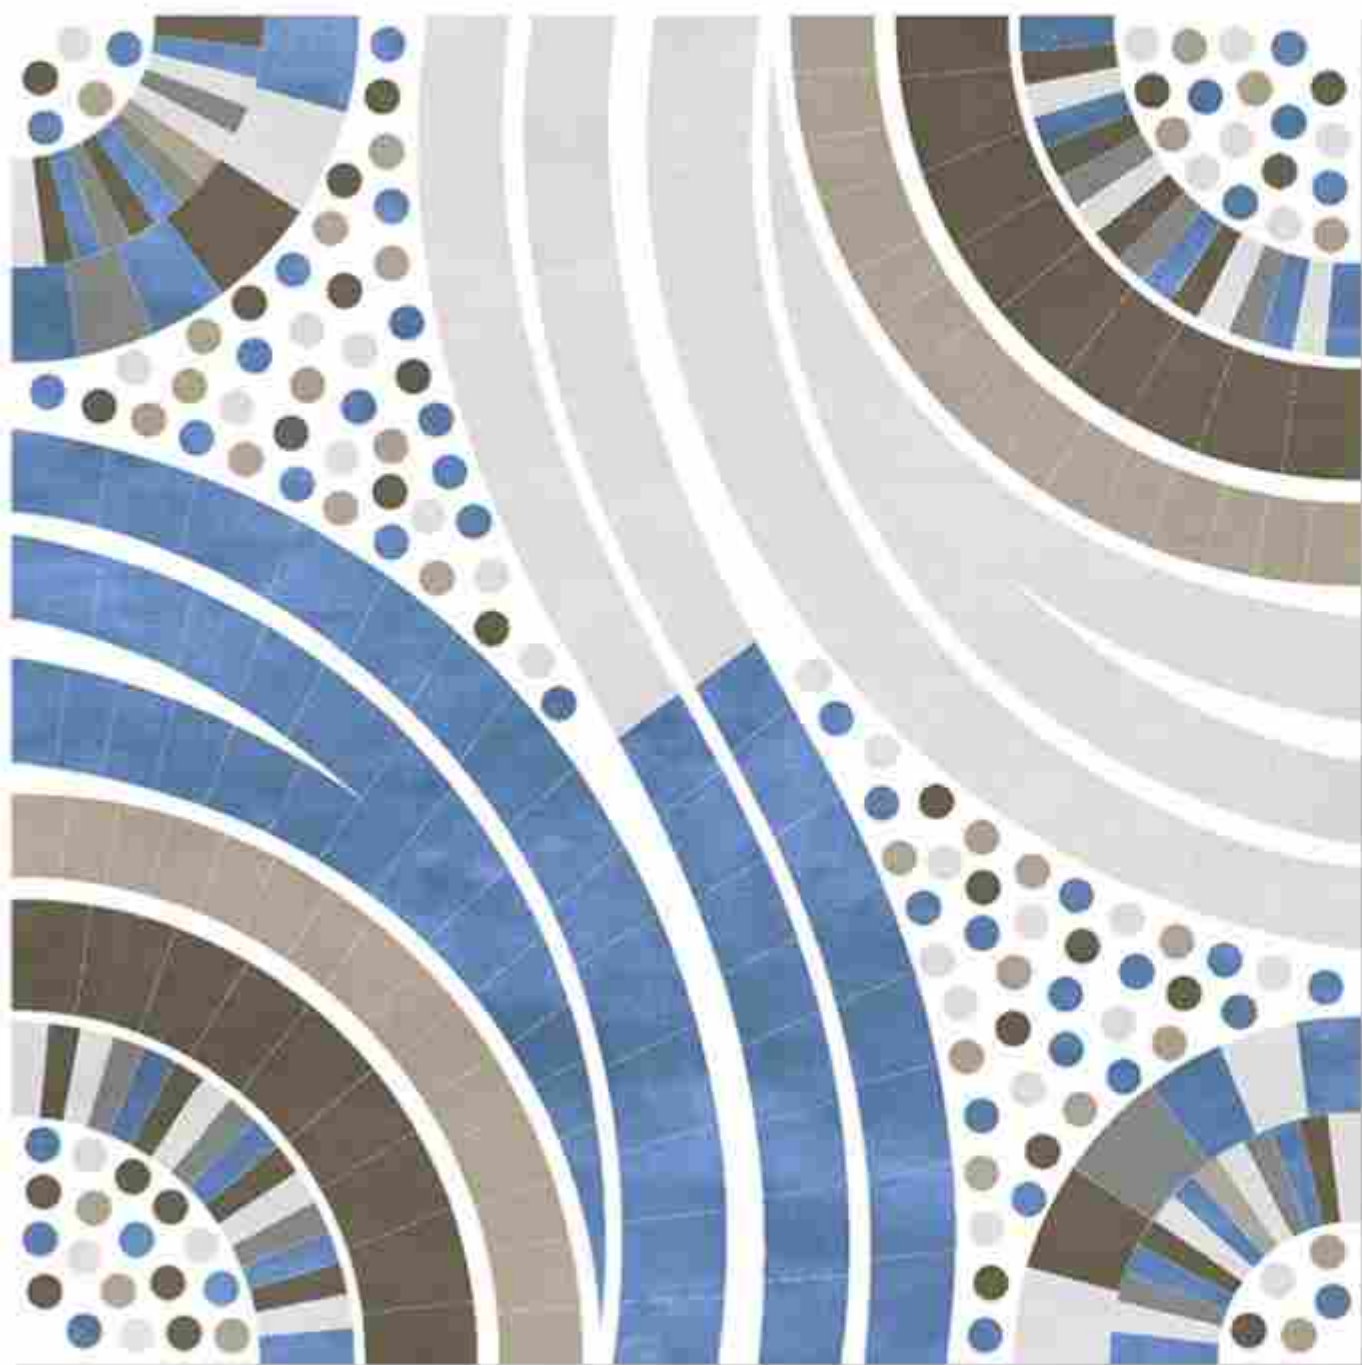

1912


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

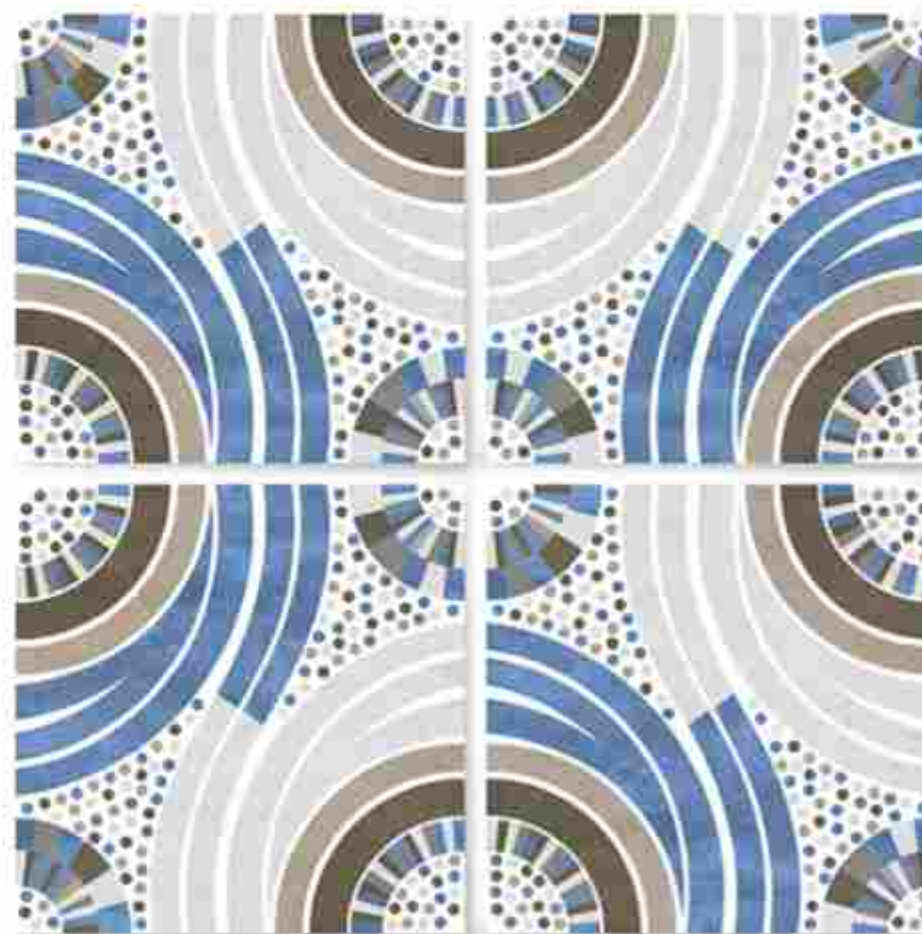

Applications






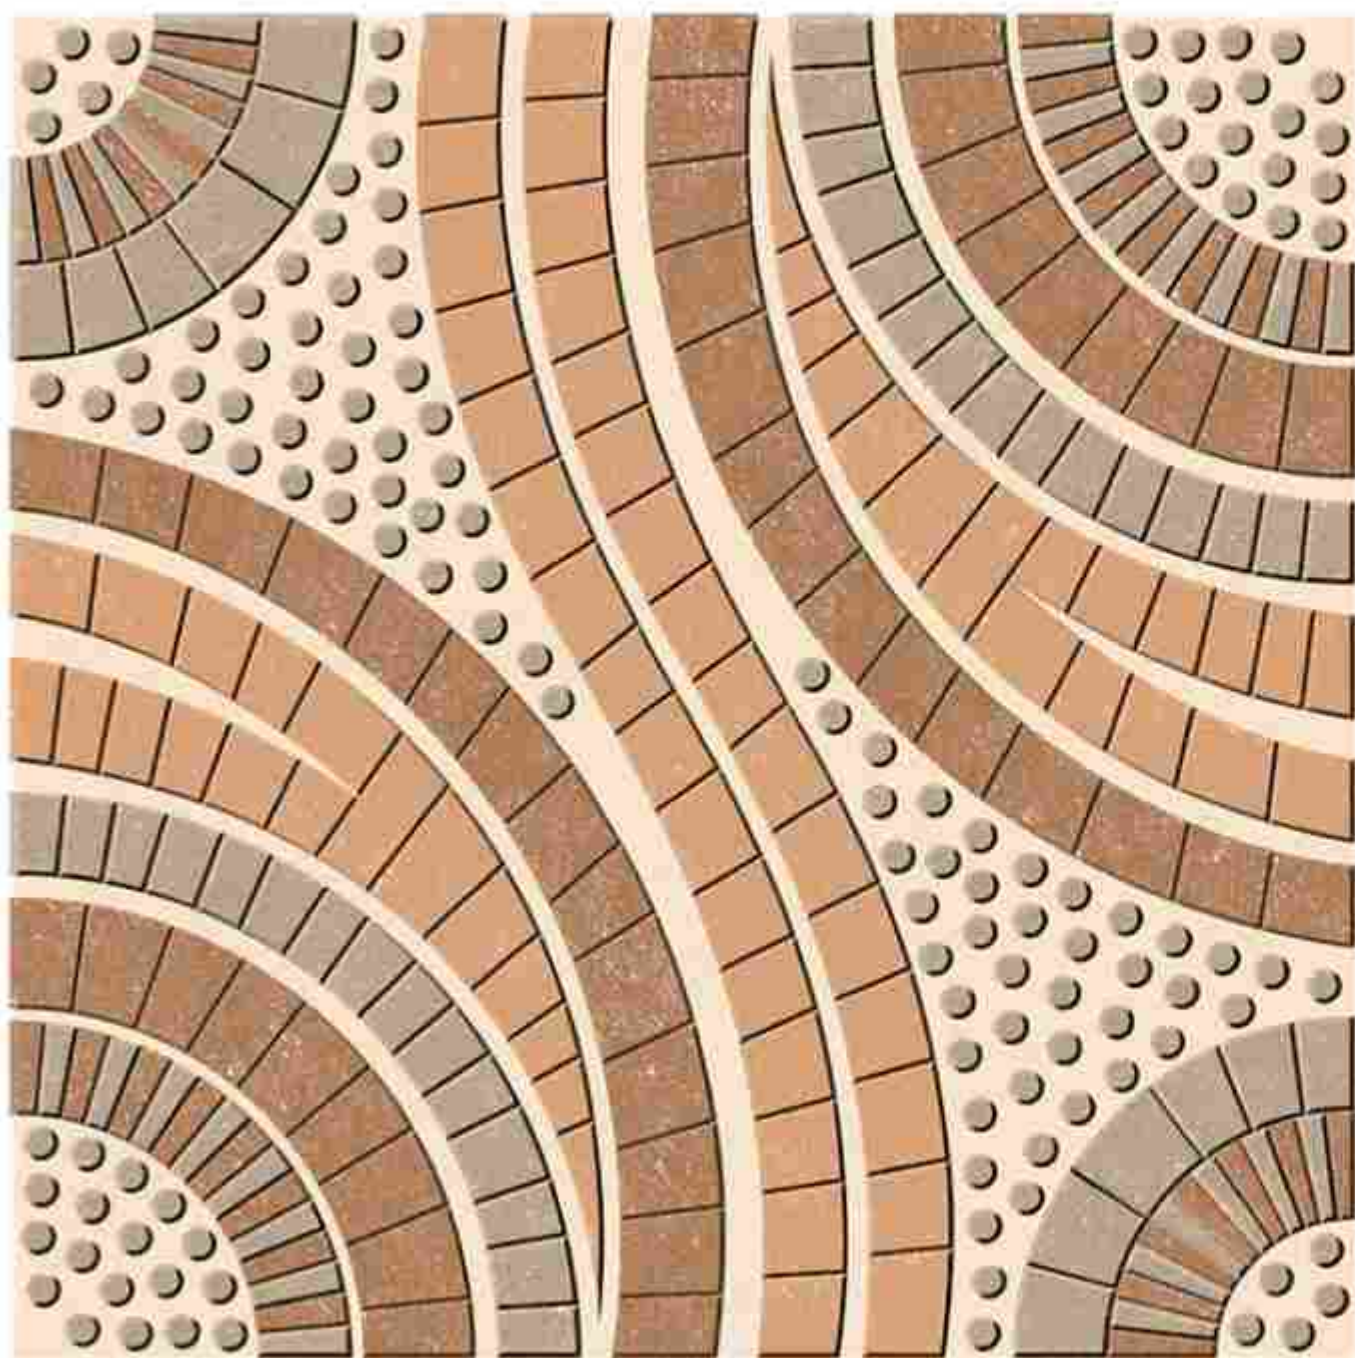

1914

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

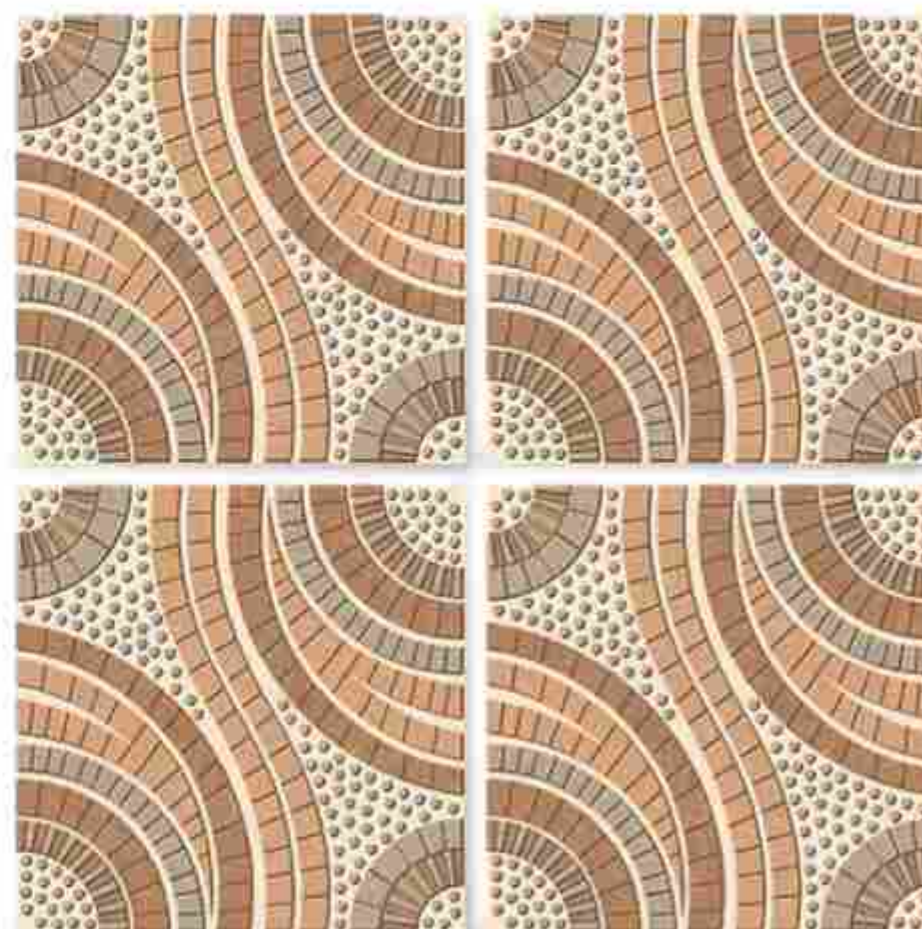

Applications







1915

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








1918


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

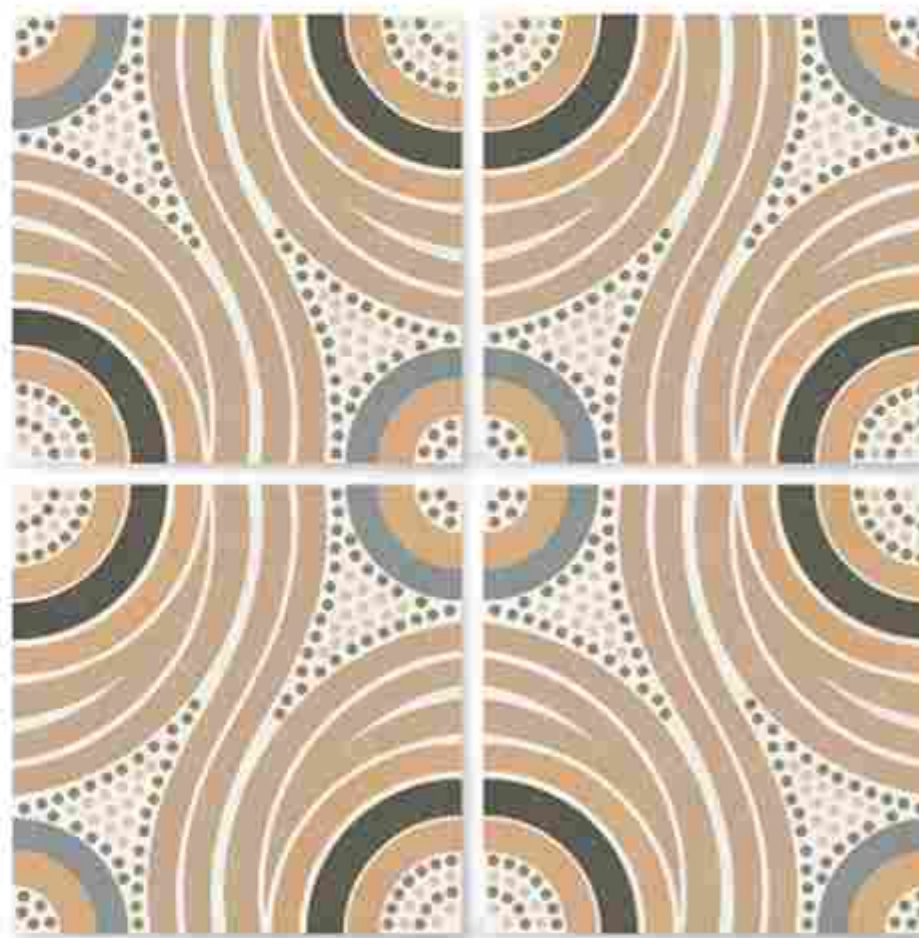

Applications






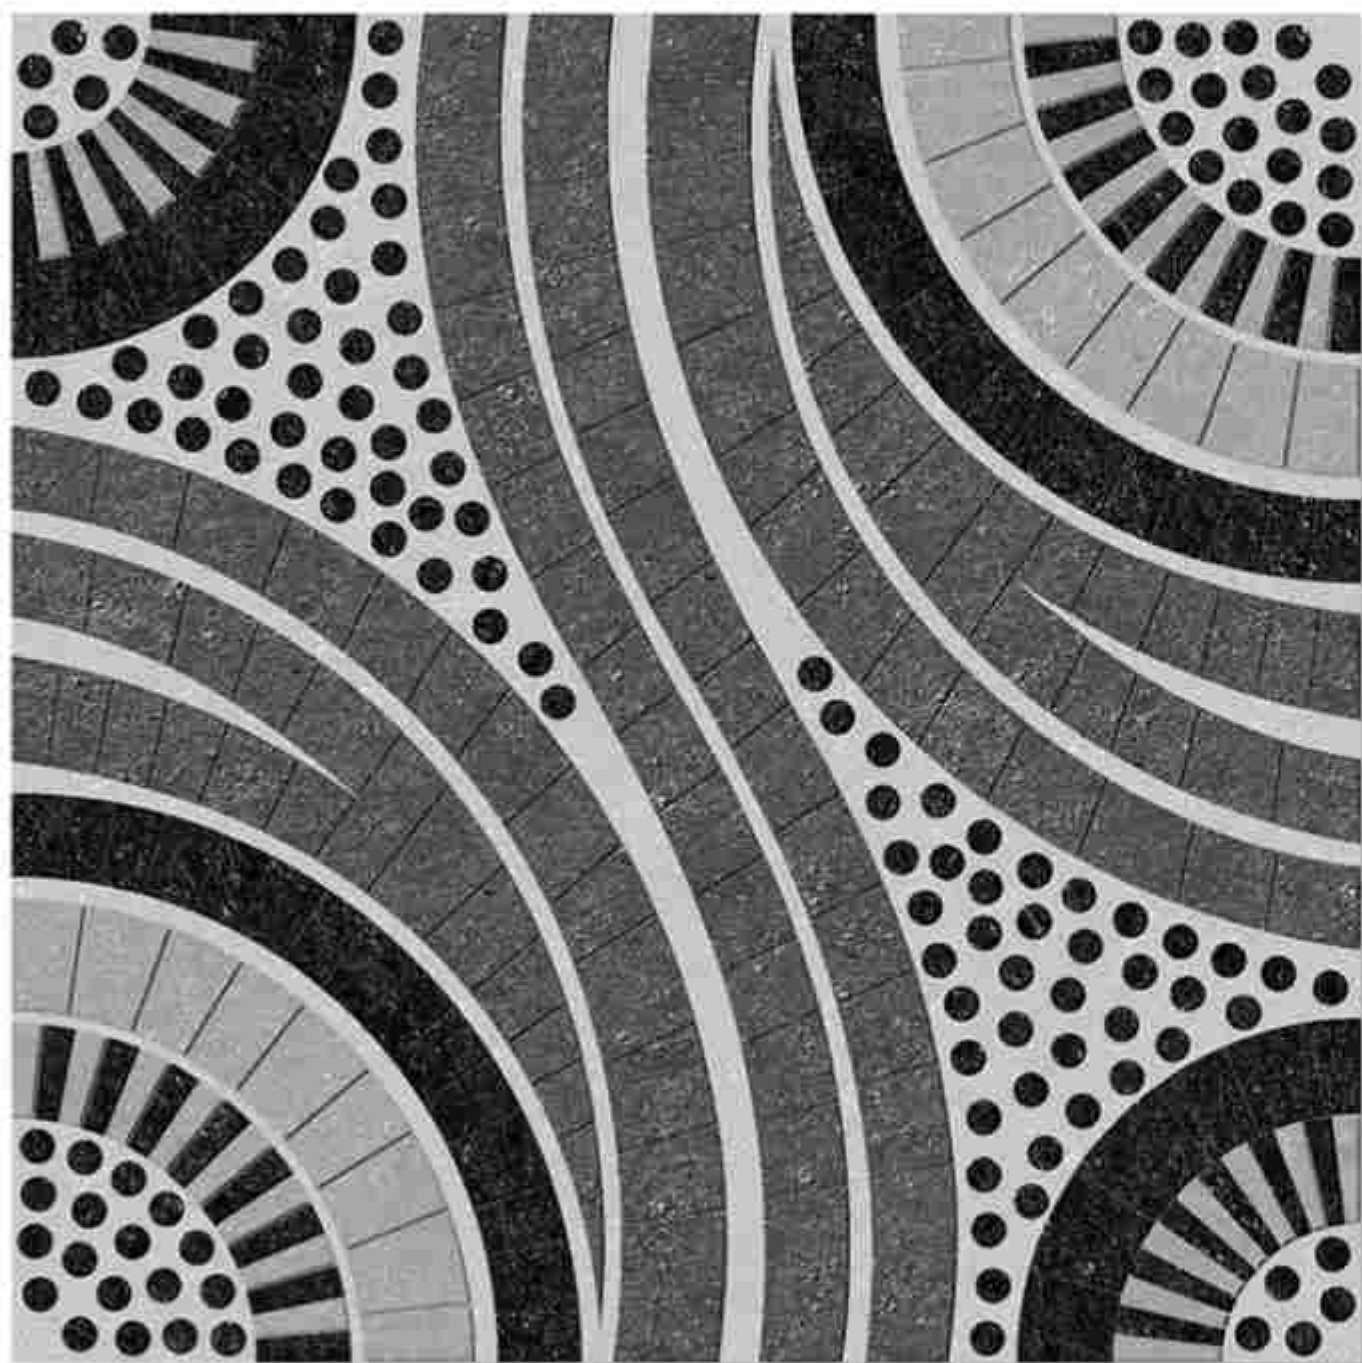

1919

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

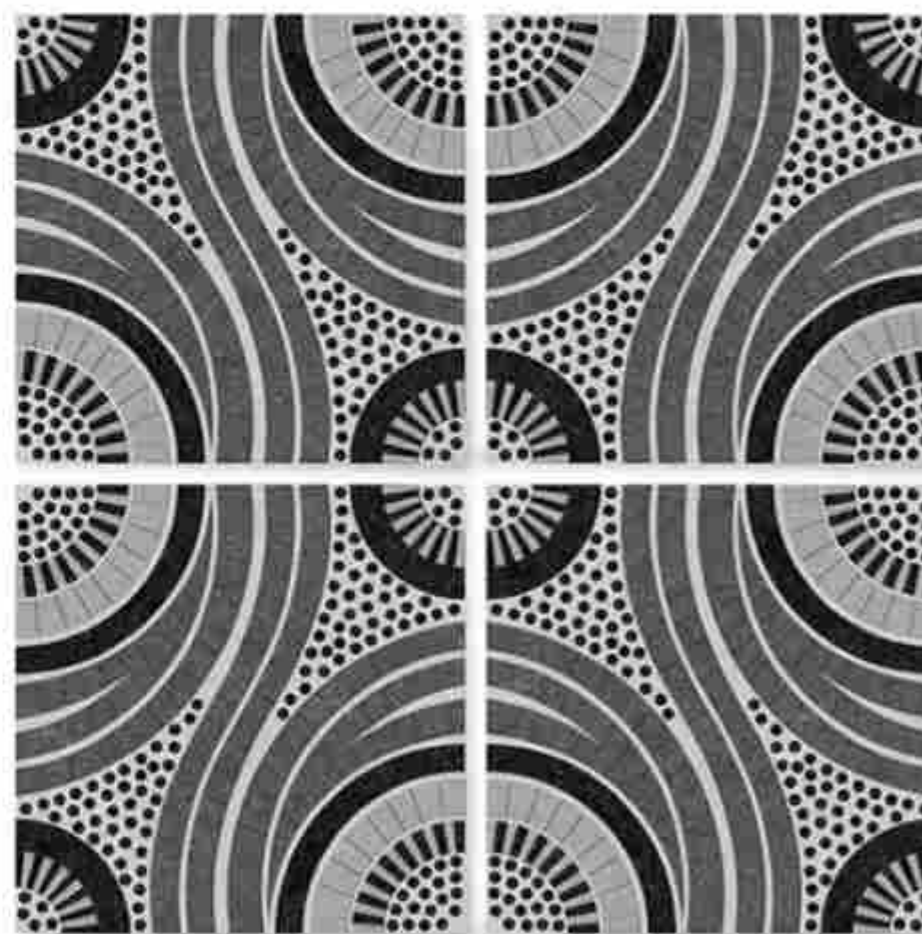

Applications







1921

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








1922

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

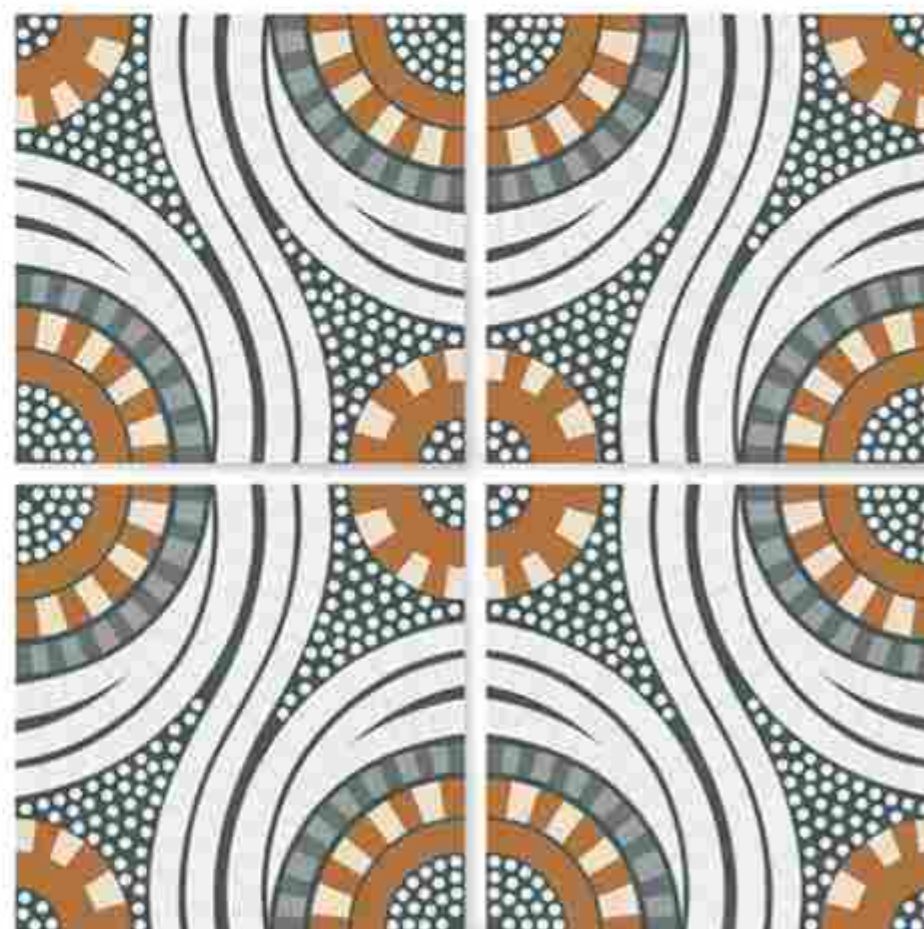

Applications








1923


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

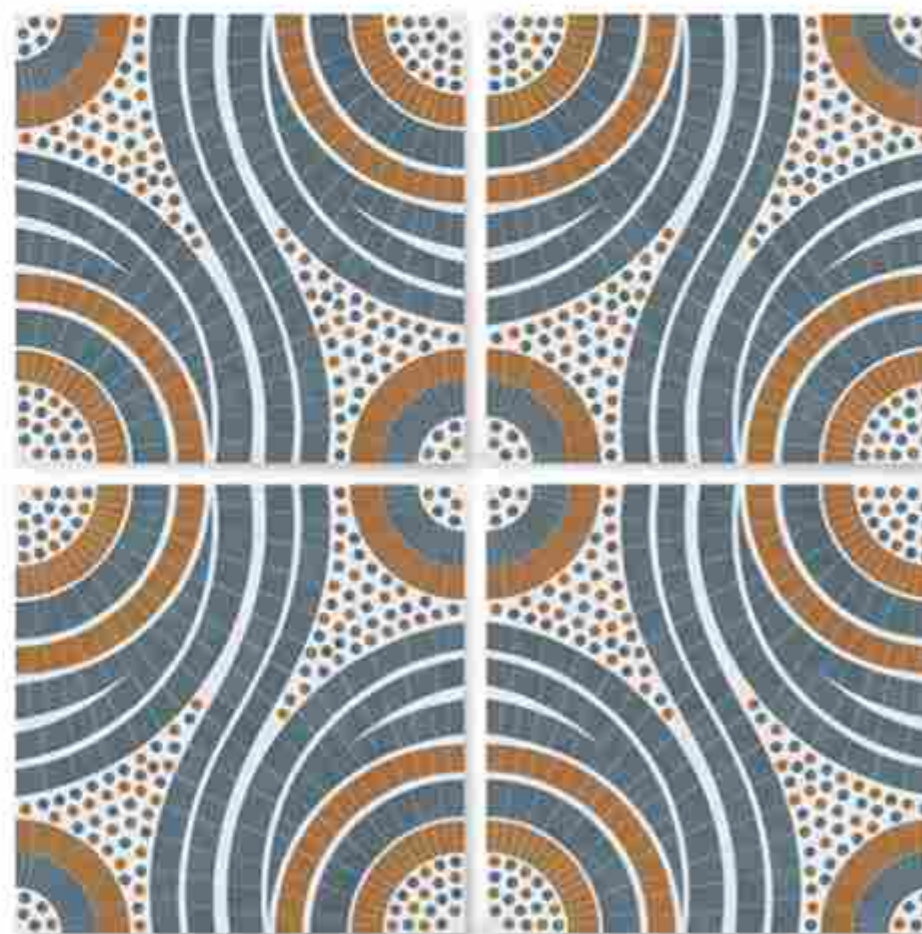

Applications






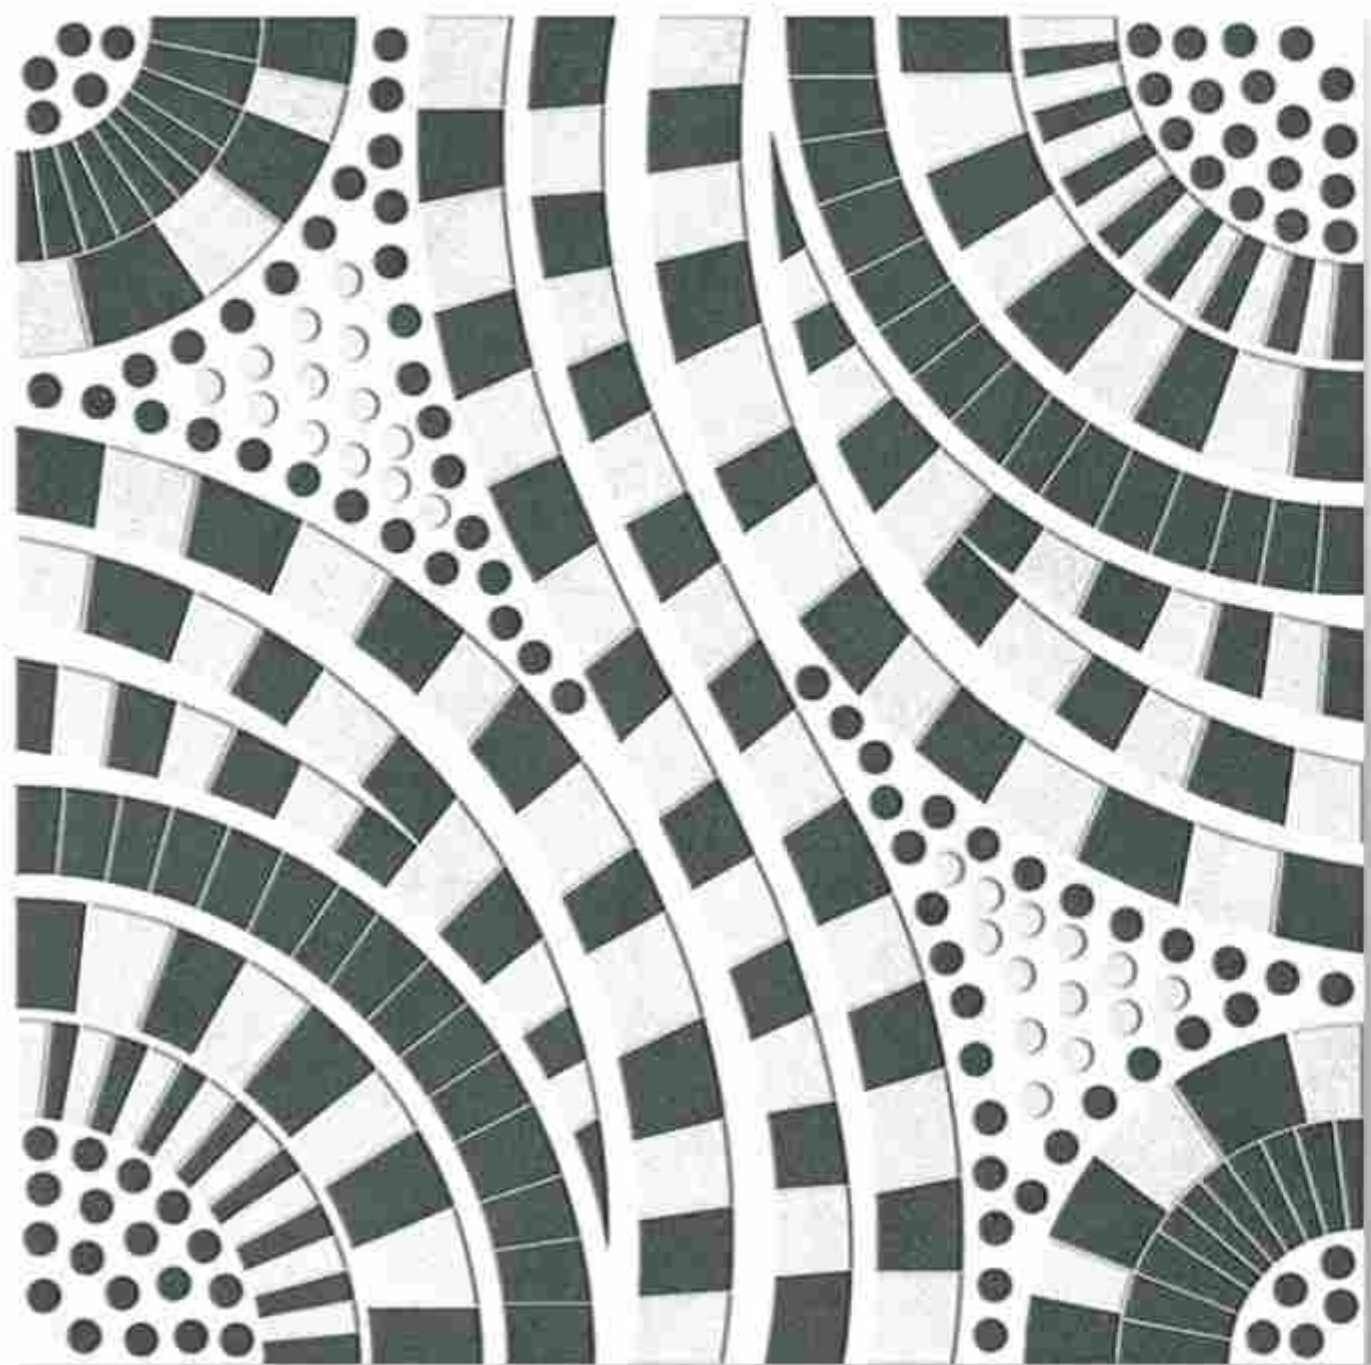

59006


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

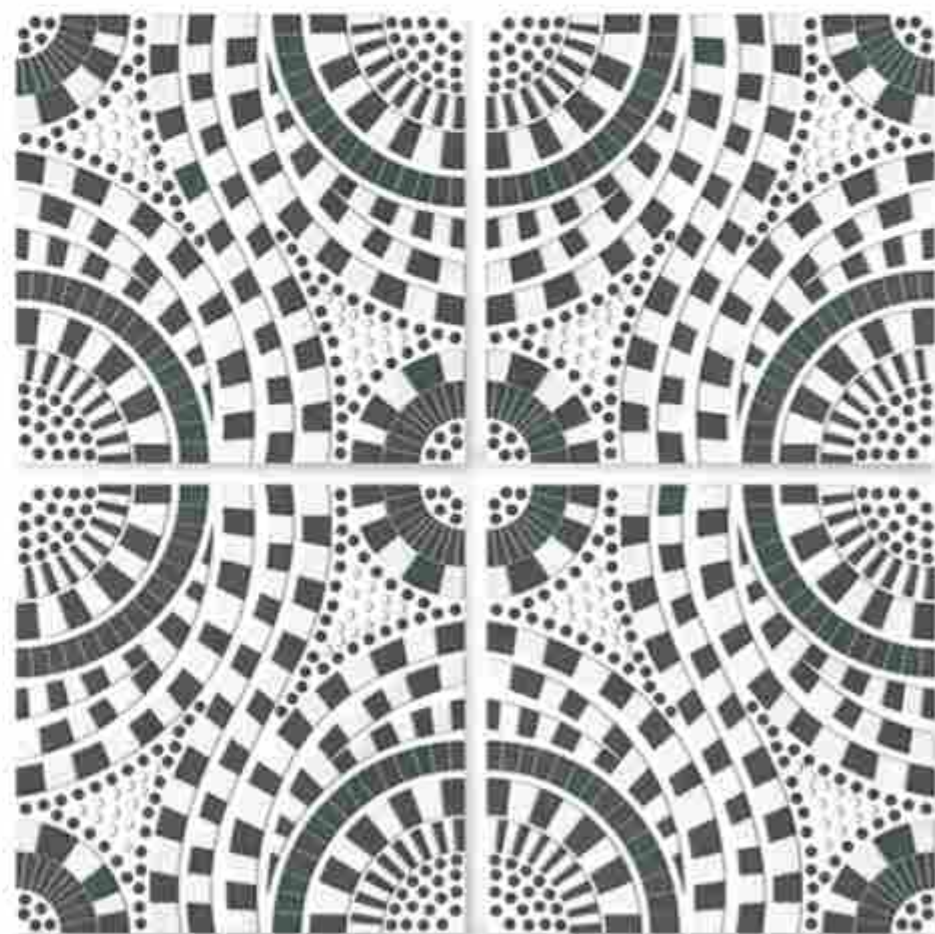

Applications






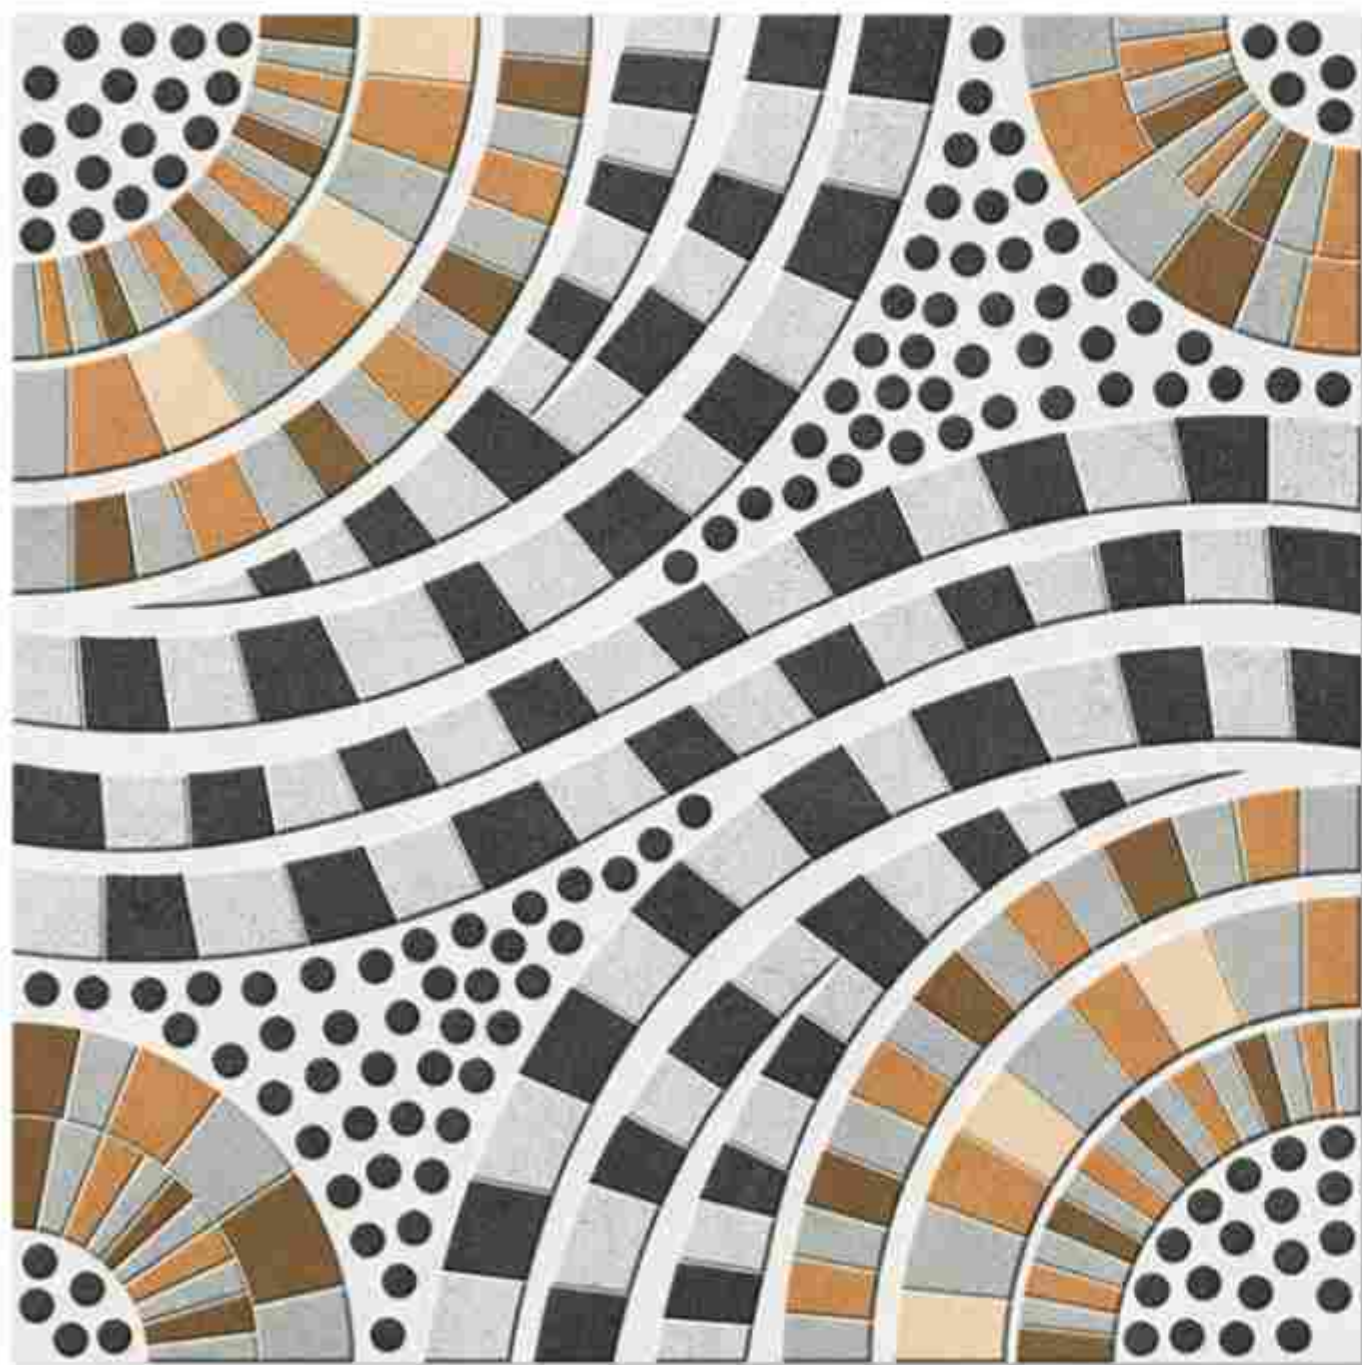

59008


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

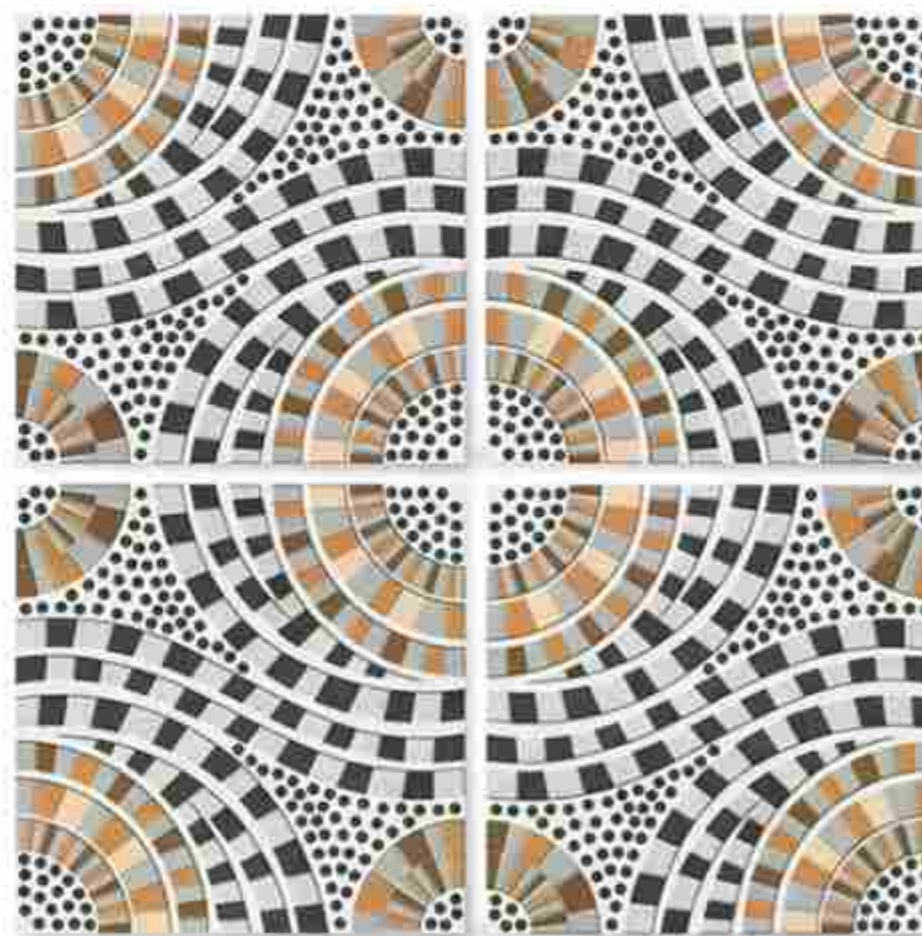

Applications





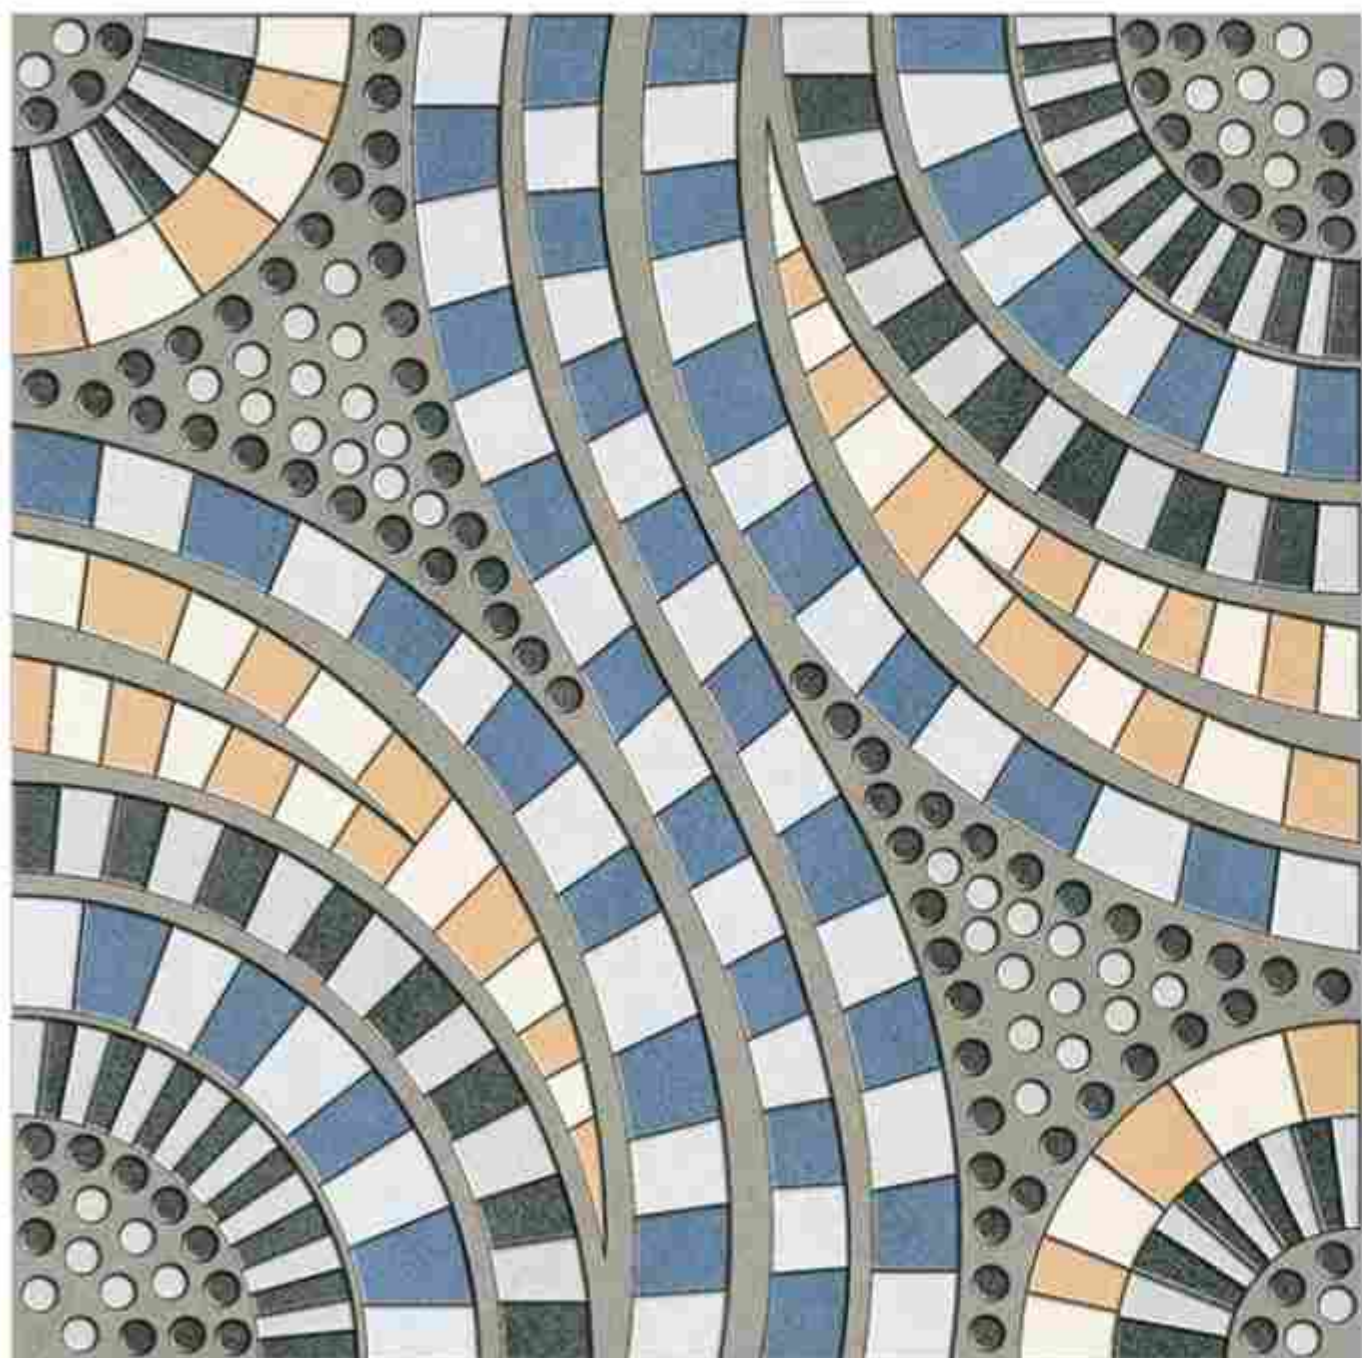

59010


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications






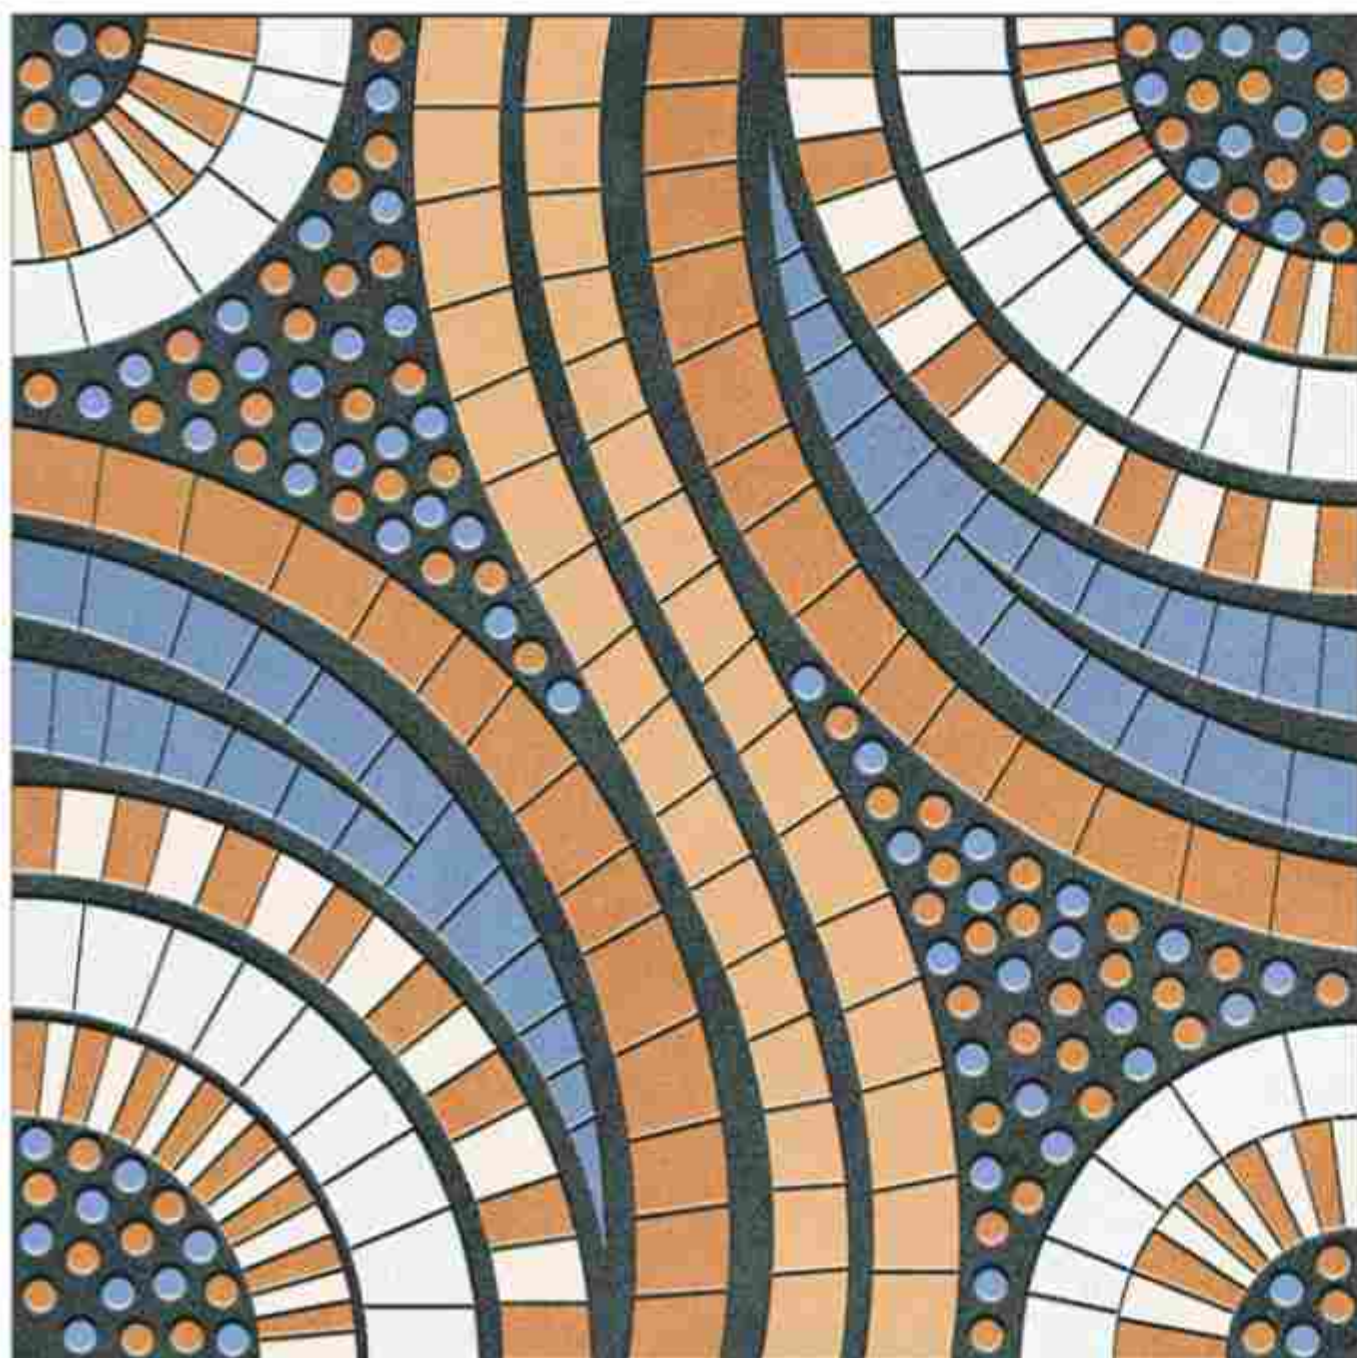

59011


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

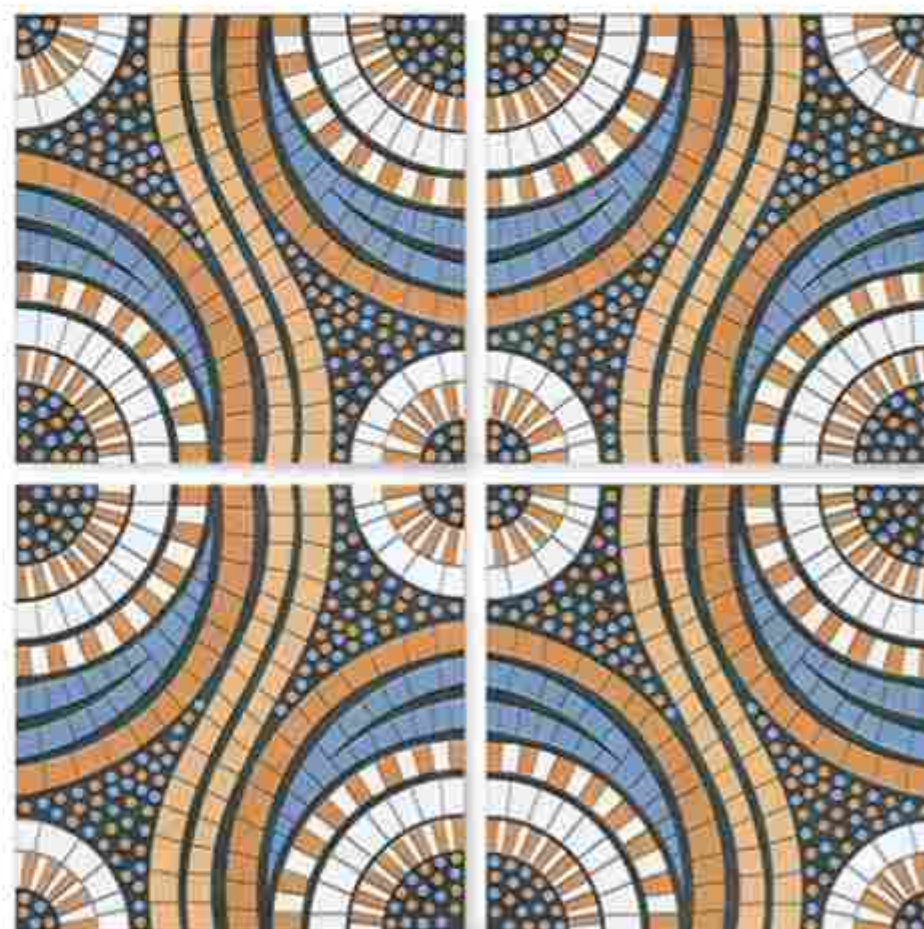

Applications






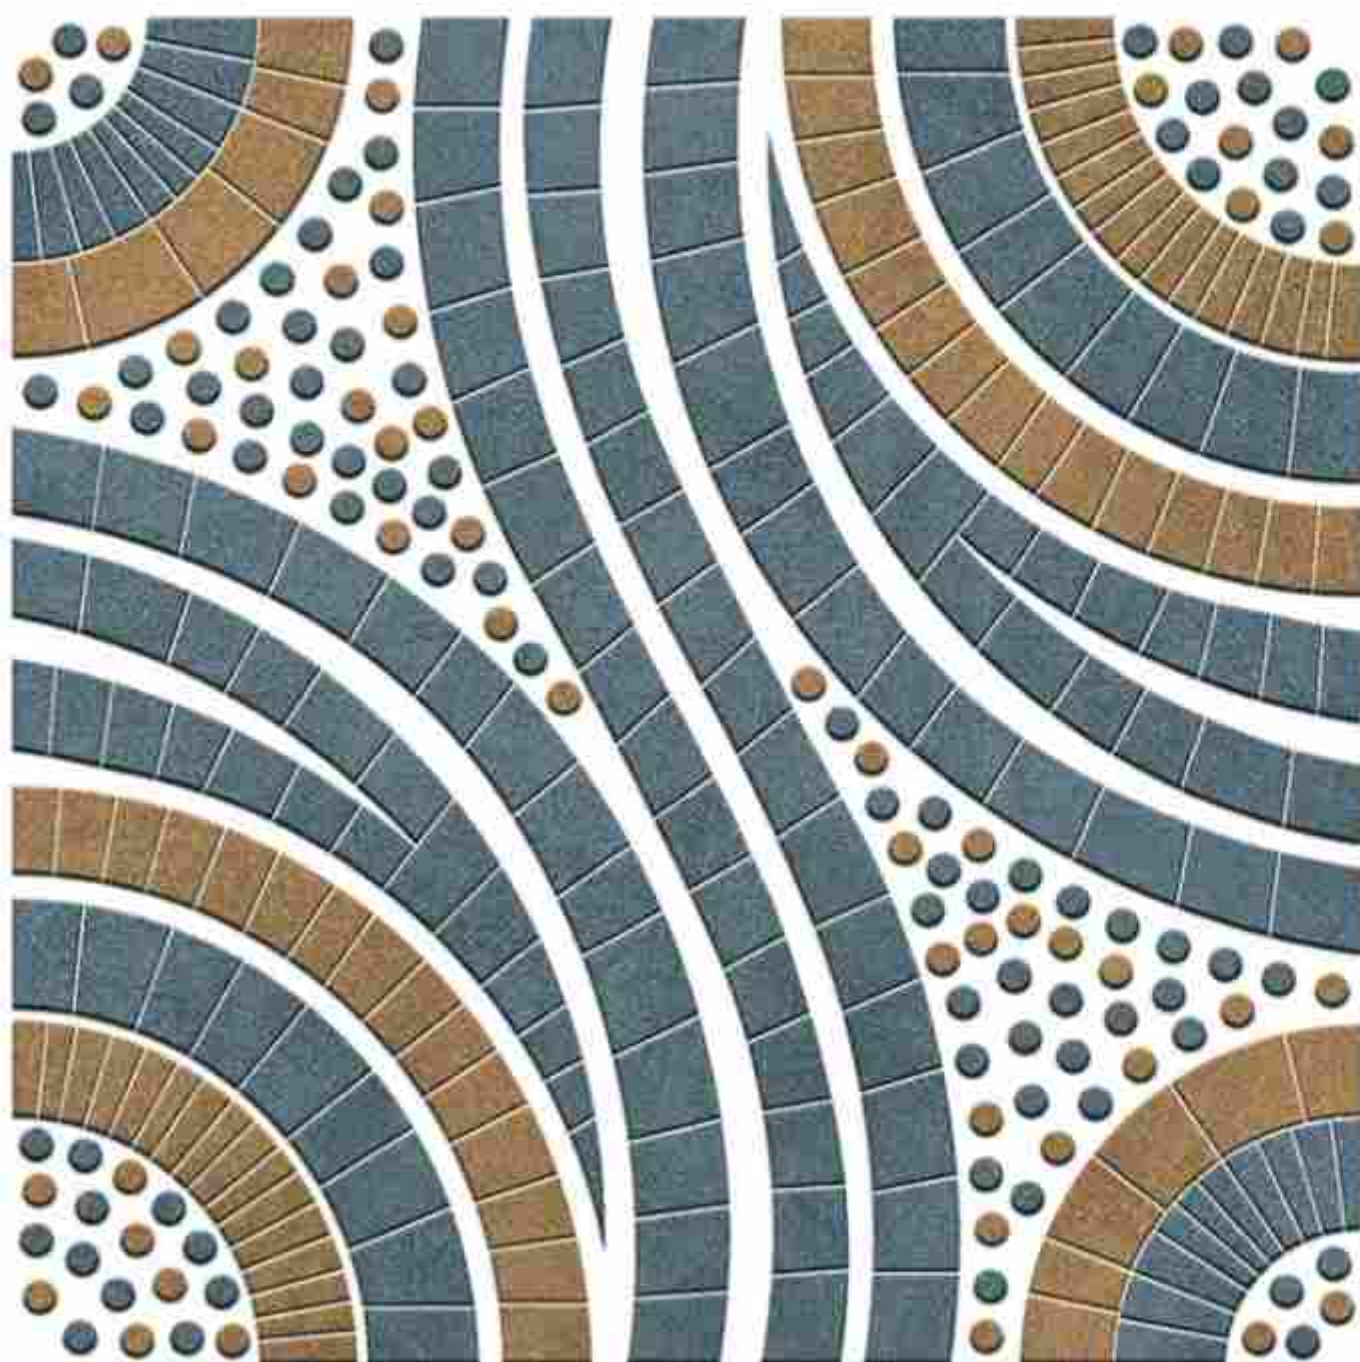

59012


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

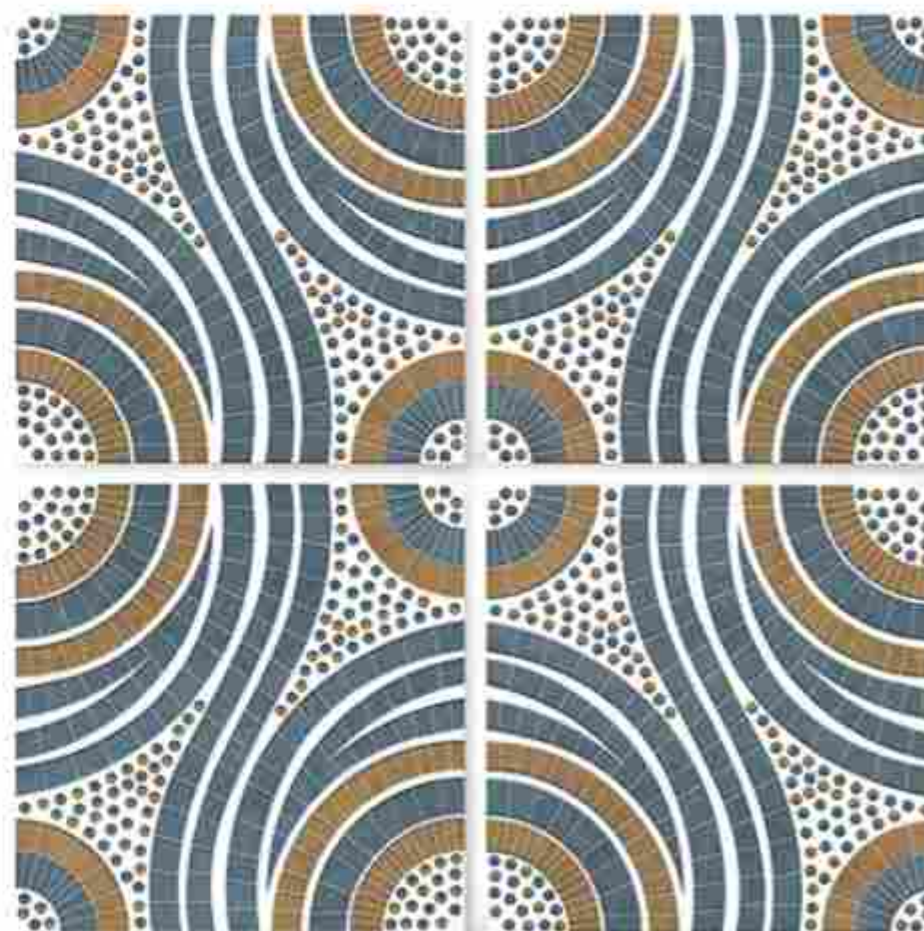

Applications






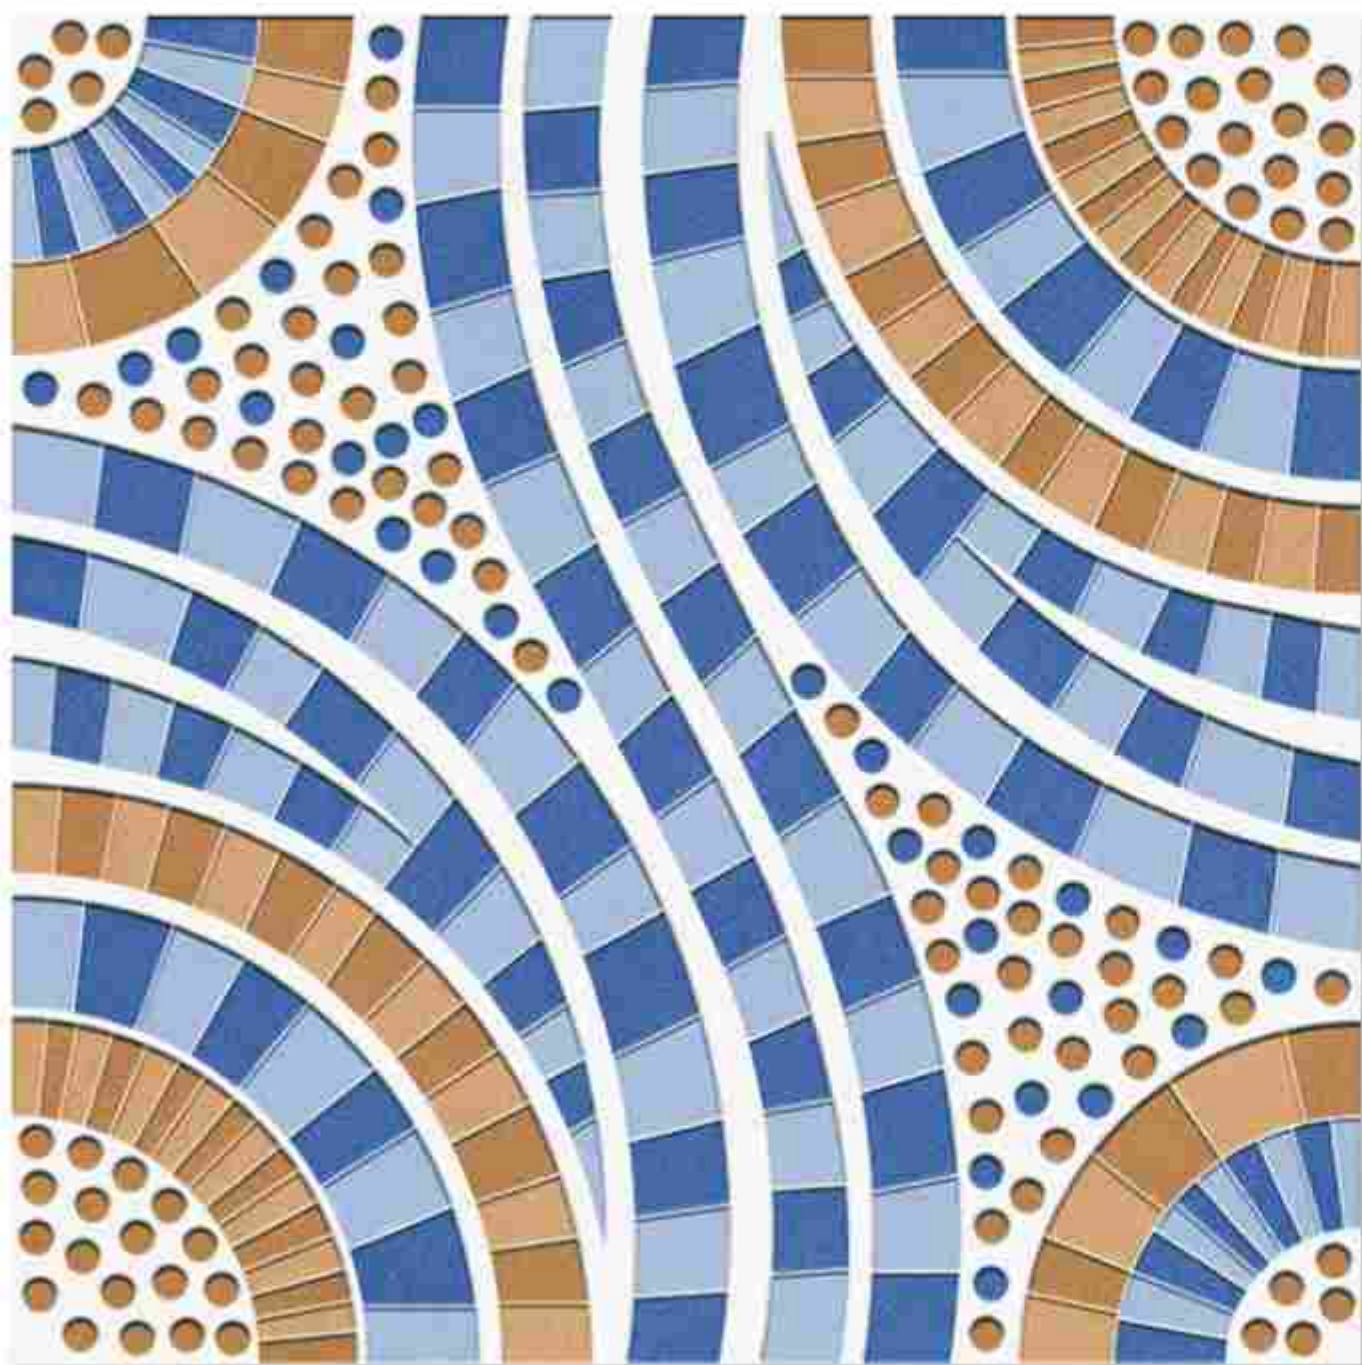

59013


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

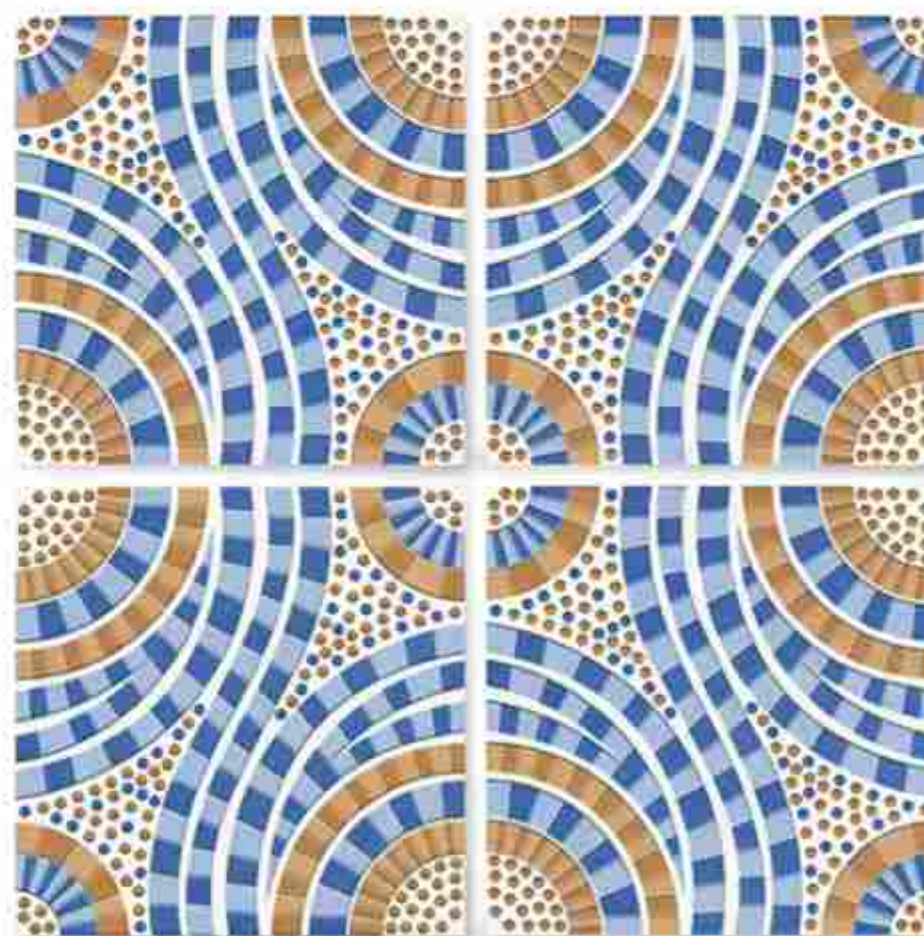


Applications





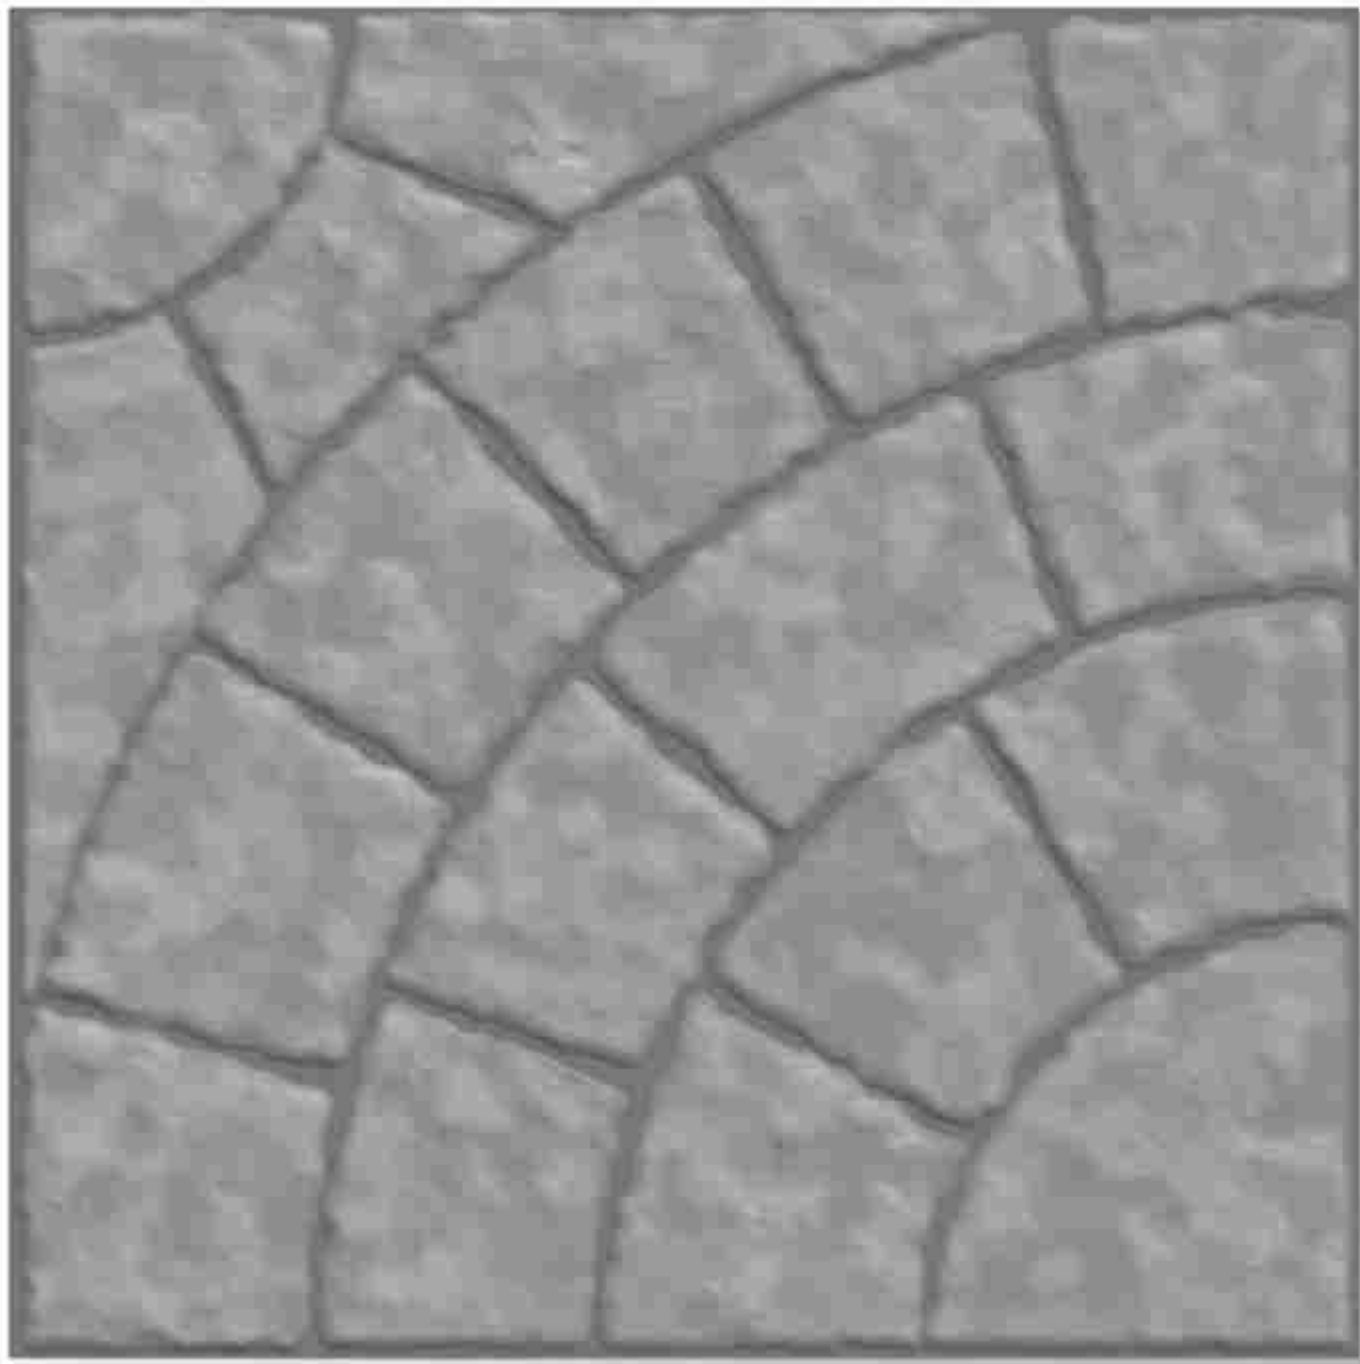

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

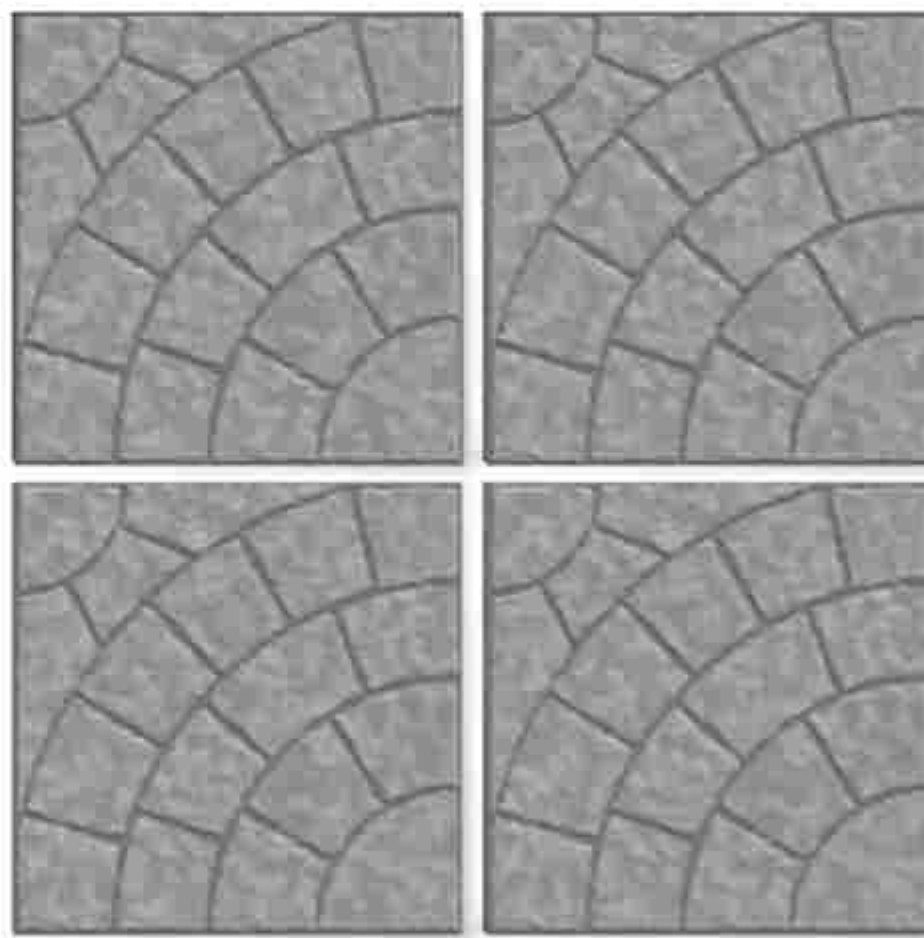


Applications





2001

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

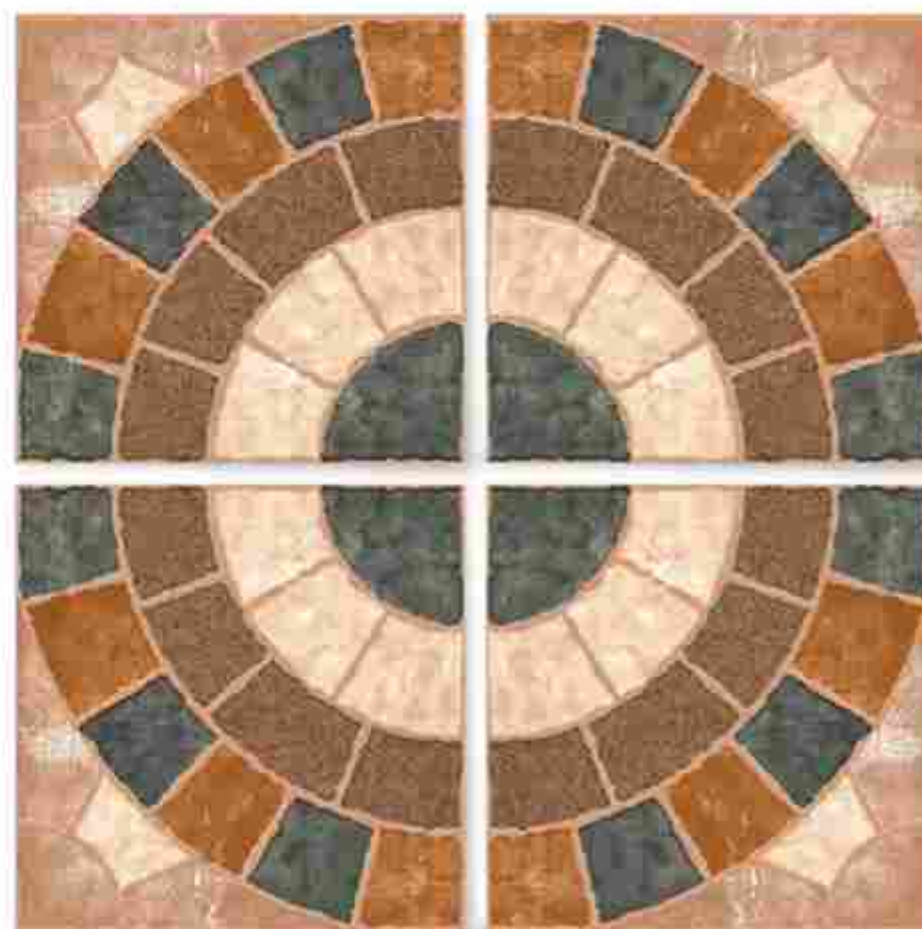


Applications





2003

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

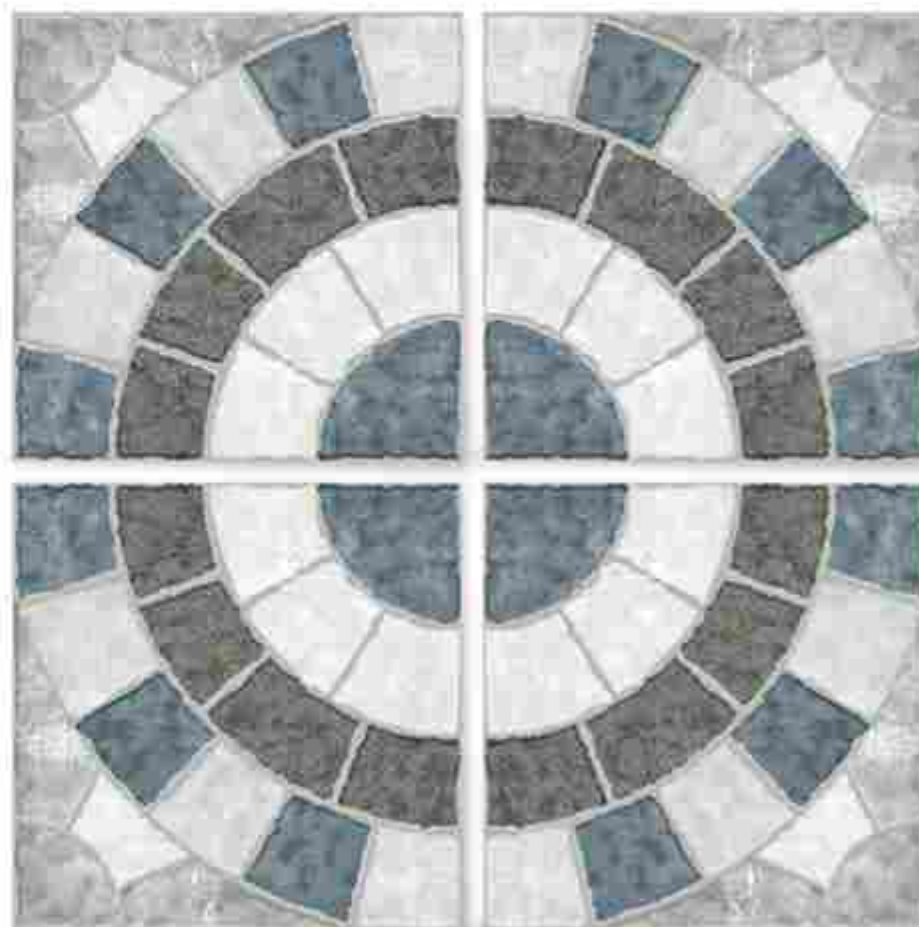

Applications








2004

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

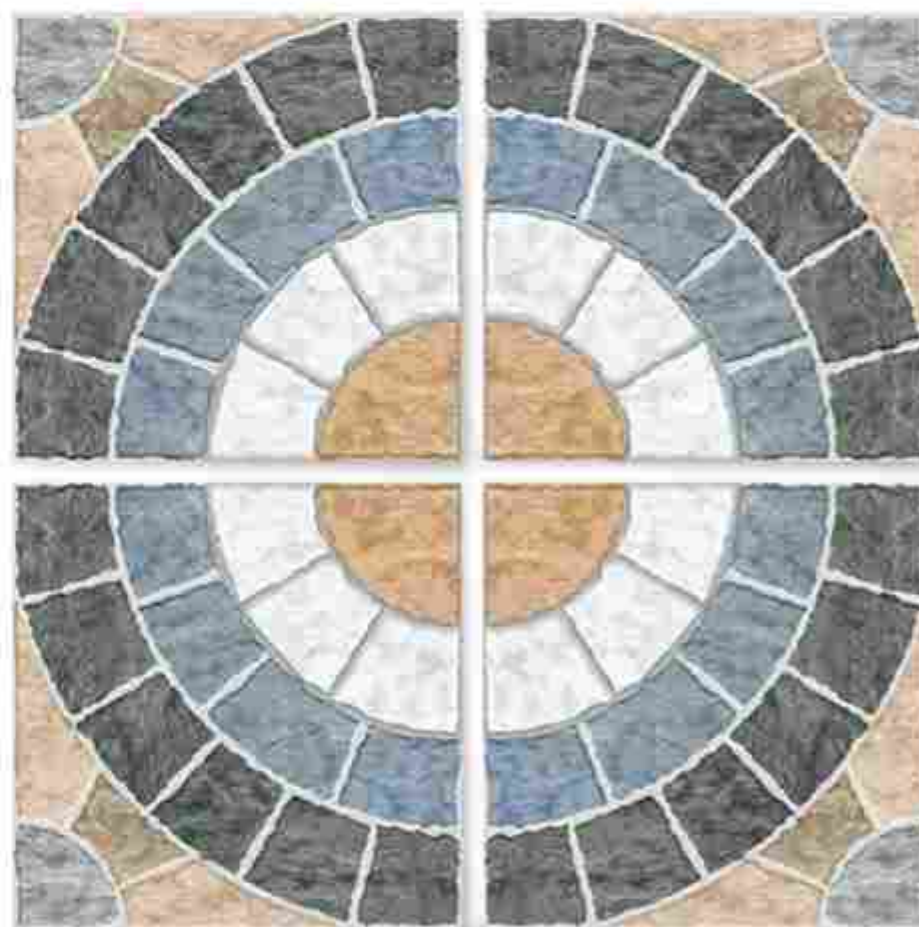

Applications








2005

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

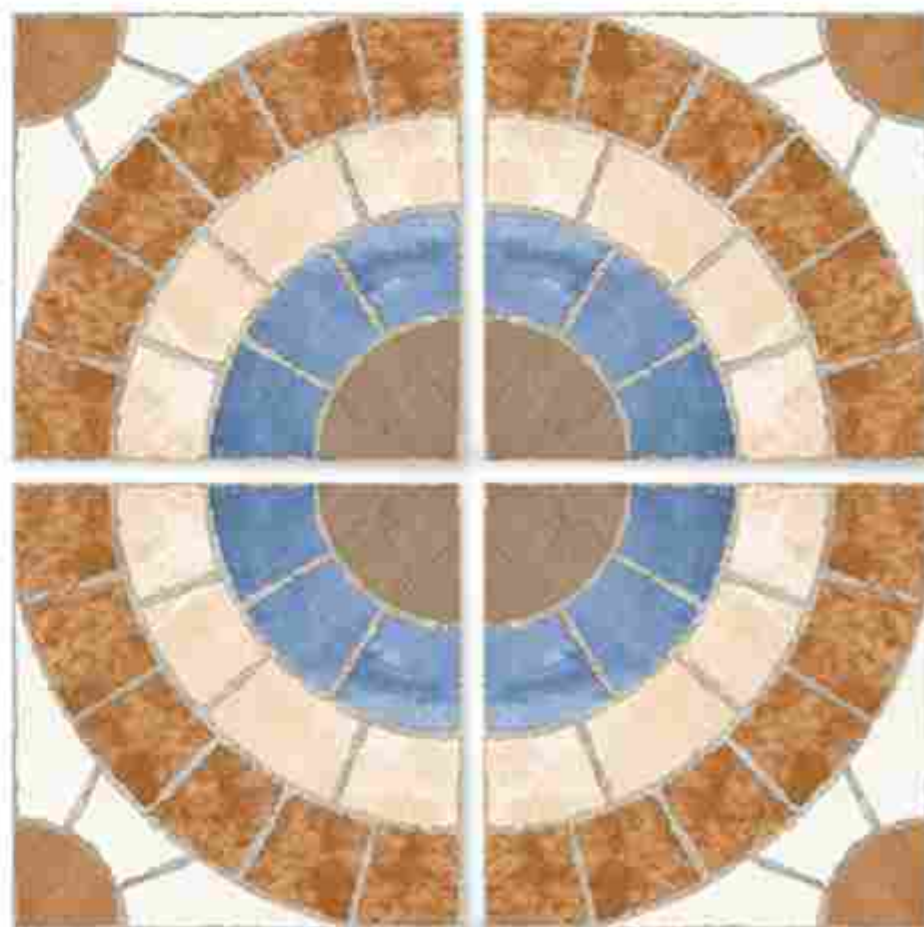

Applications








2006

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

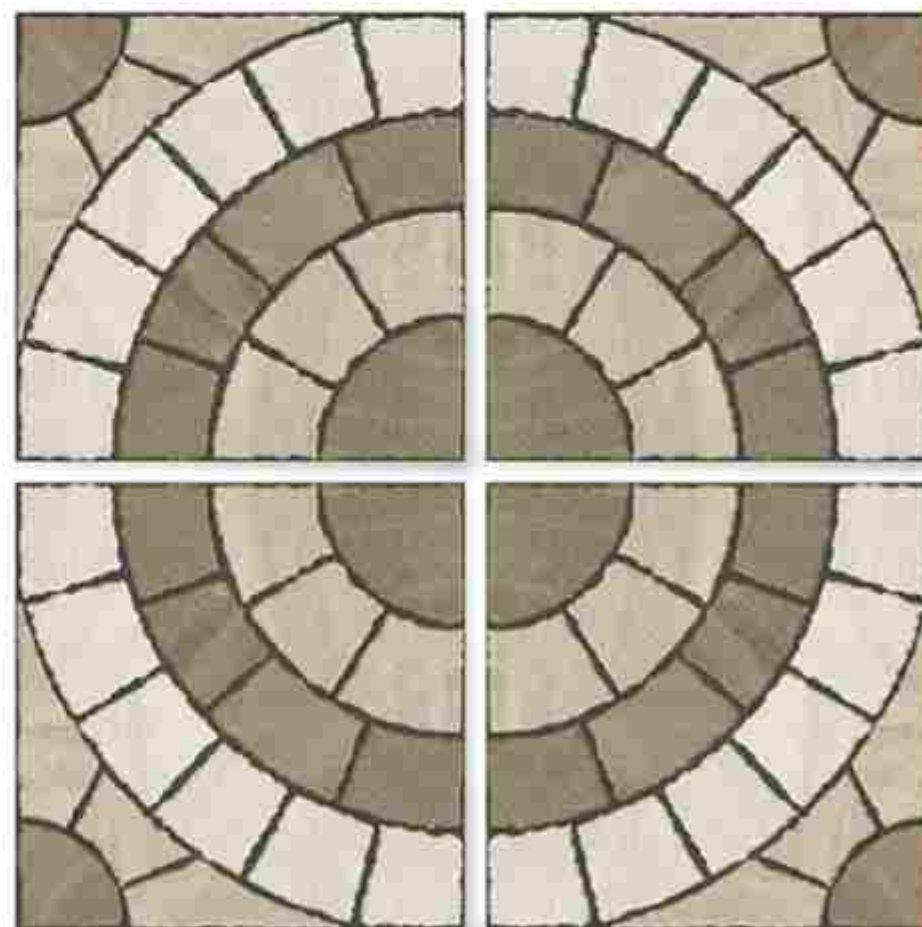

Applications



Residence



Commercial




Public & Institutional




Public Area



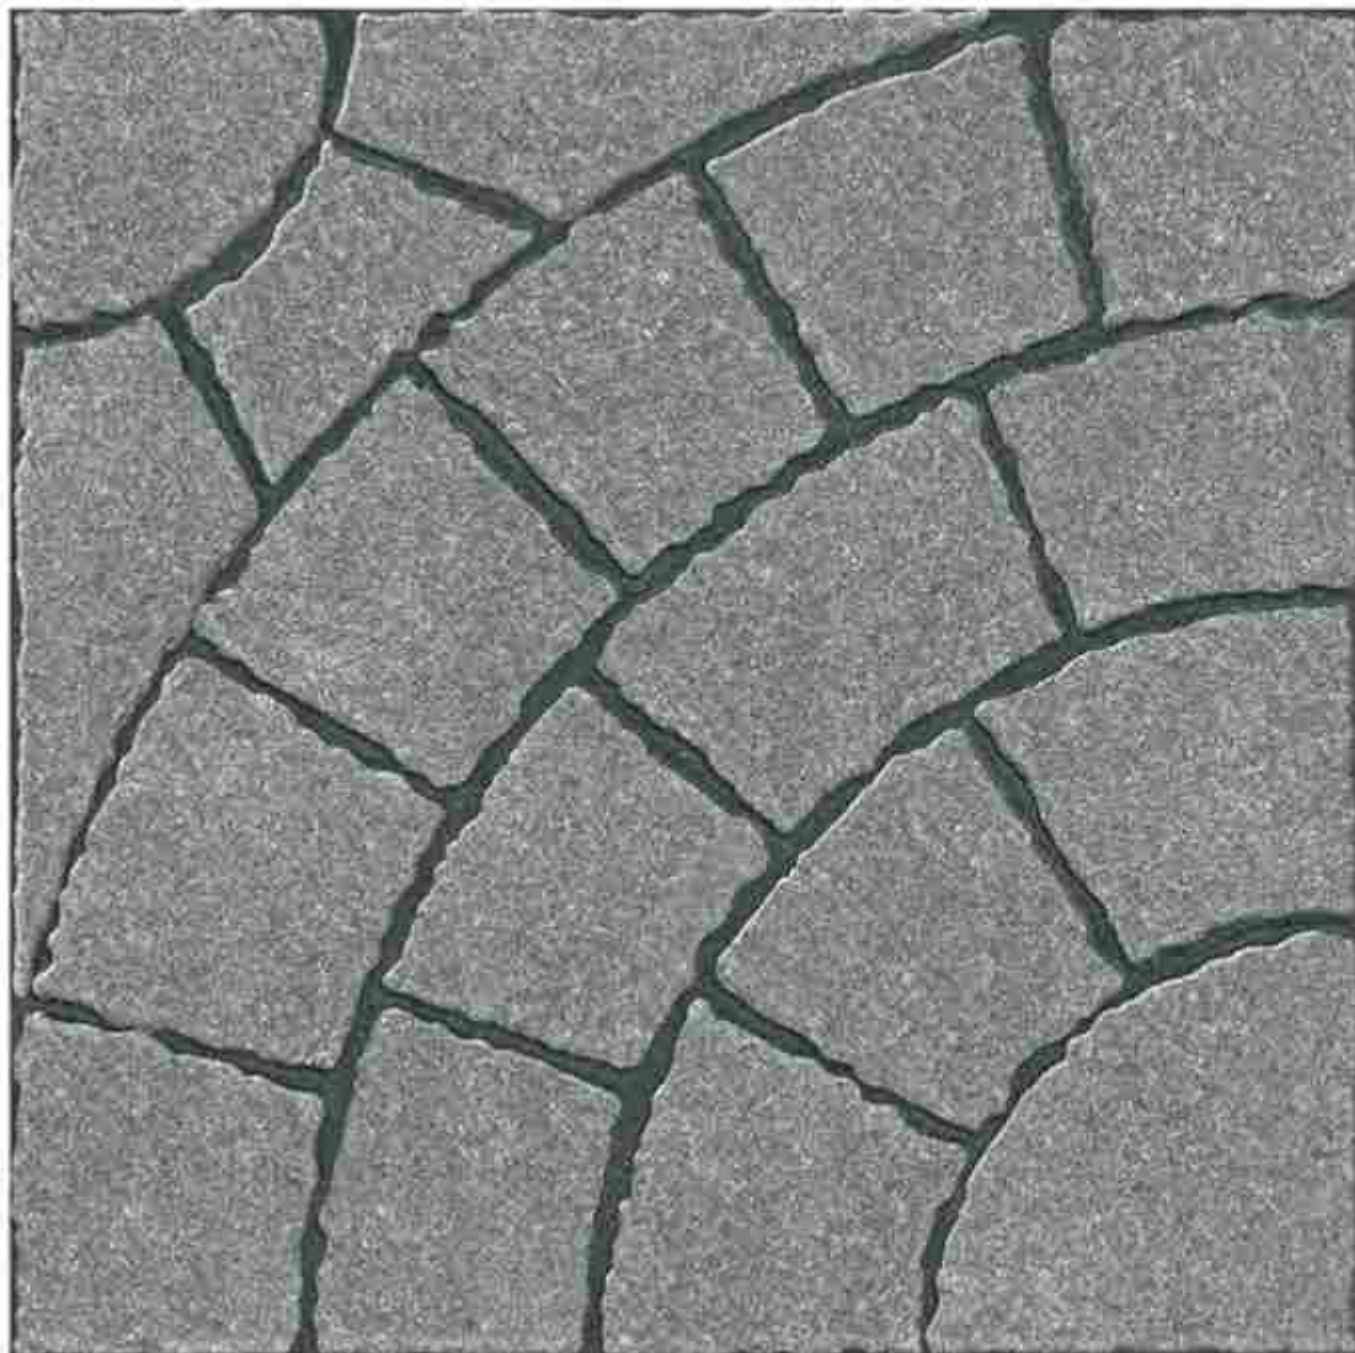

2016

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

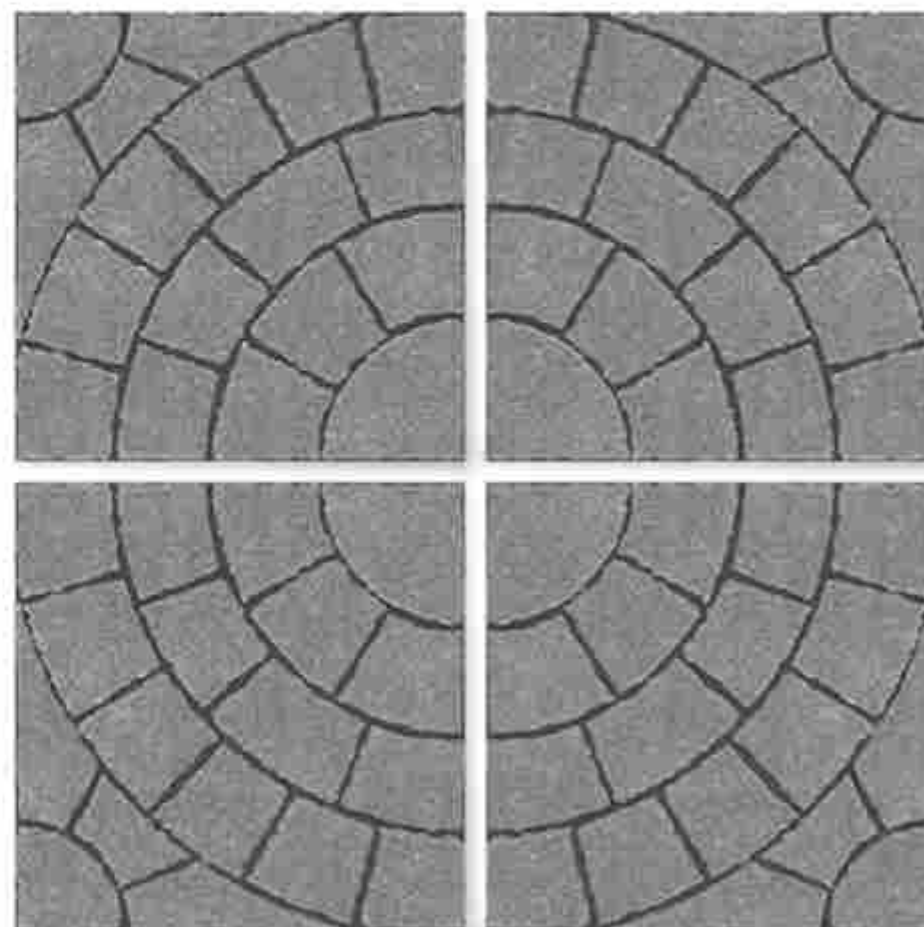

Applications








2020

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

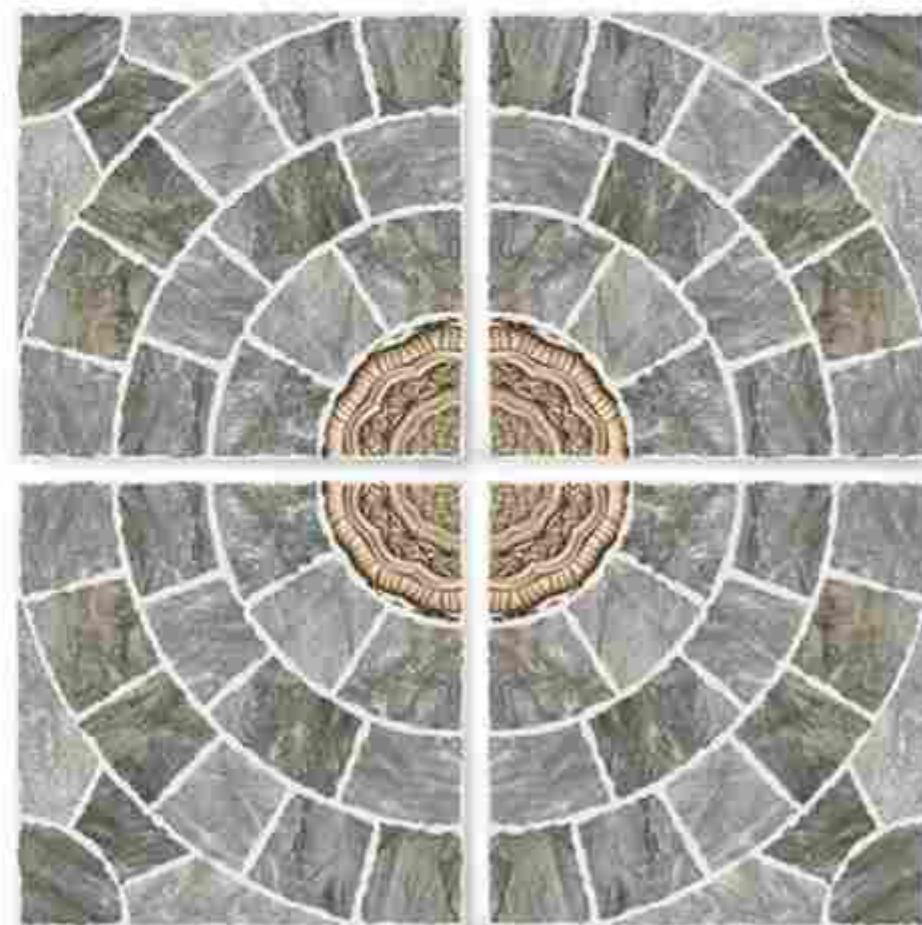

Applications








2022

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

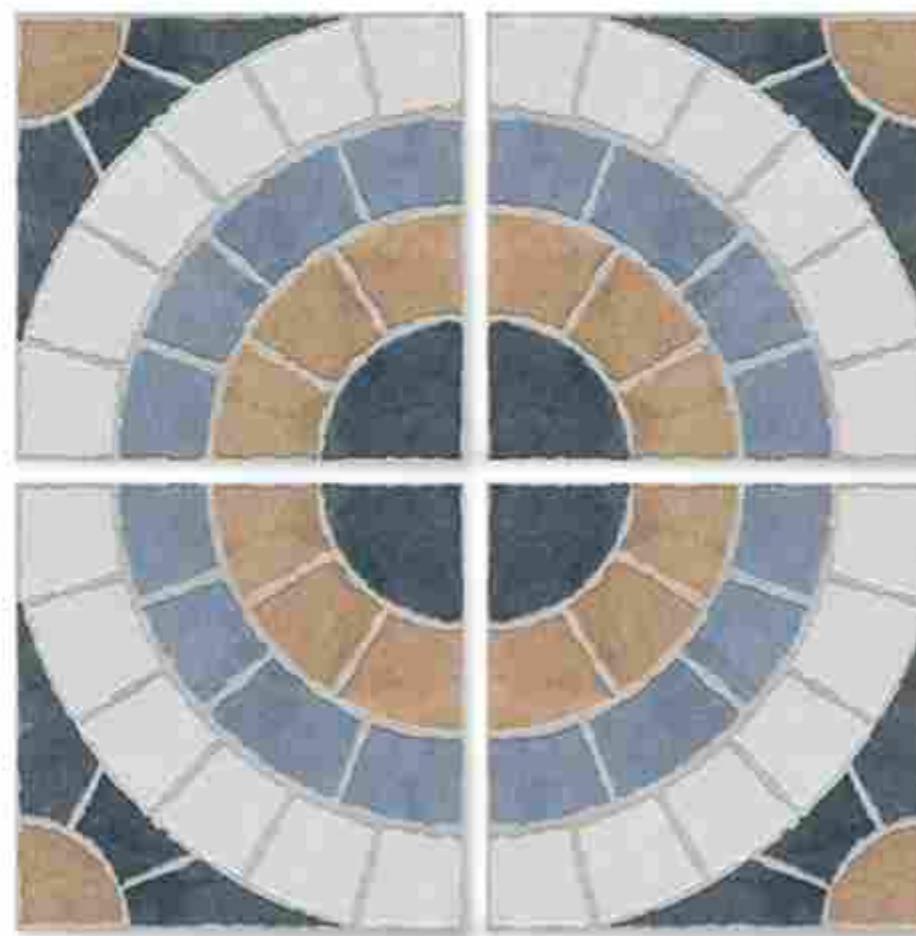

Applications








2023

Size	Finish	Thickness	Random
400x400 mm	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

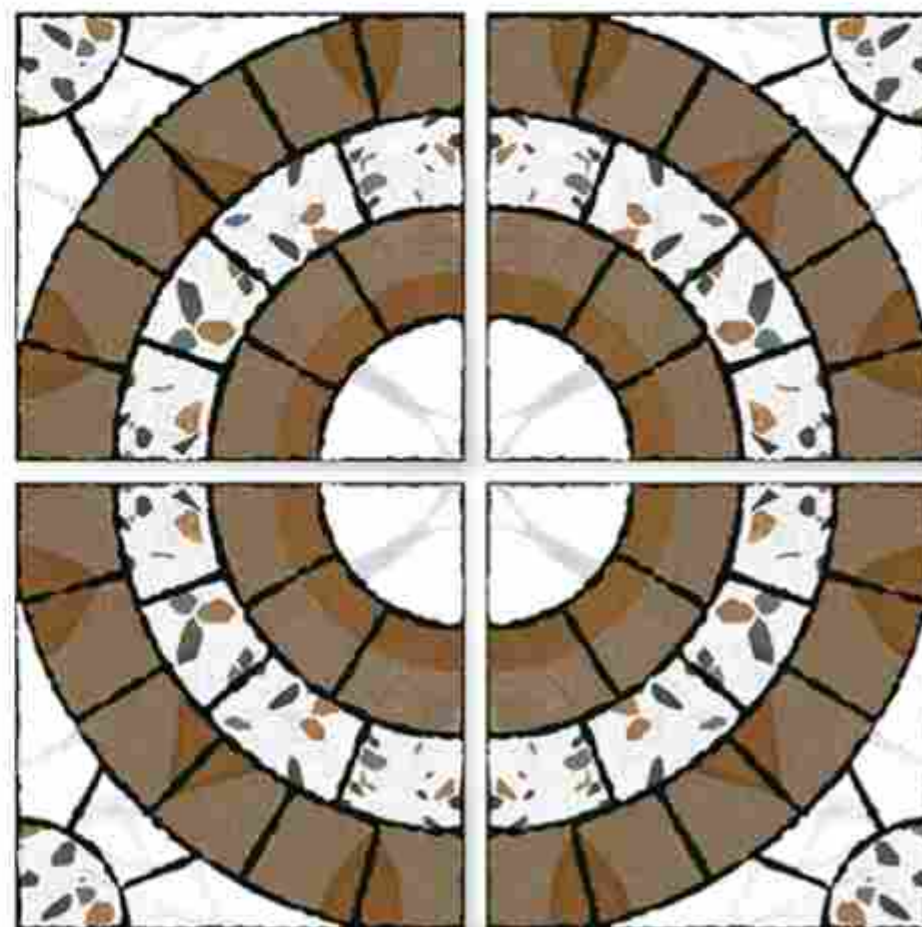

Applications







2025 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>





Applications





2026 NEW


Size	Finish	Thickness	Random
400x400 mm	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

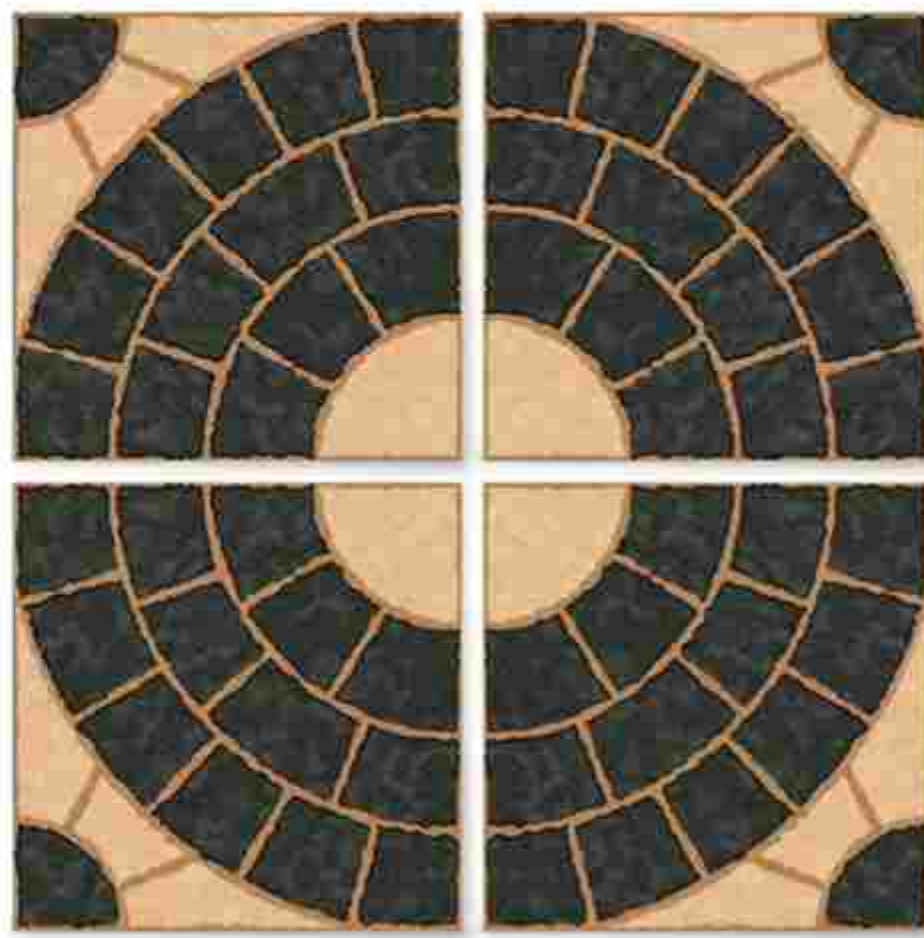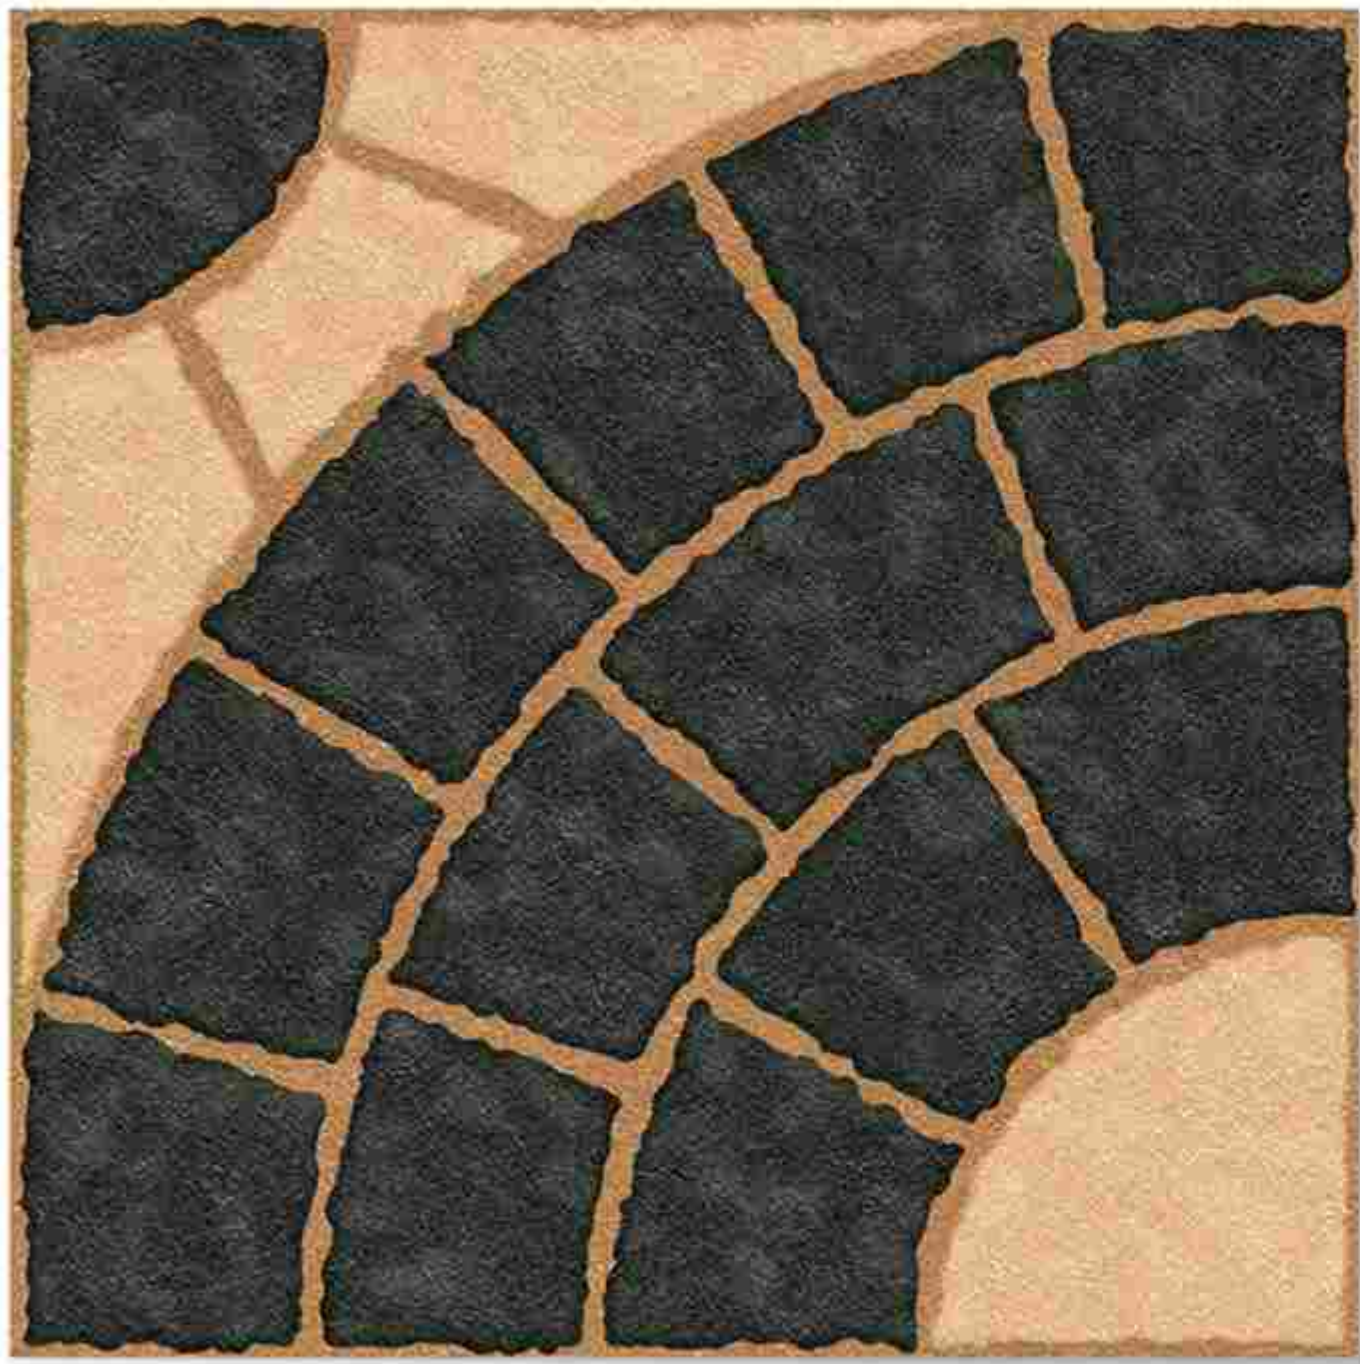

Applications






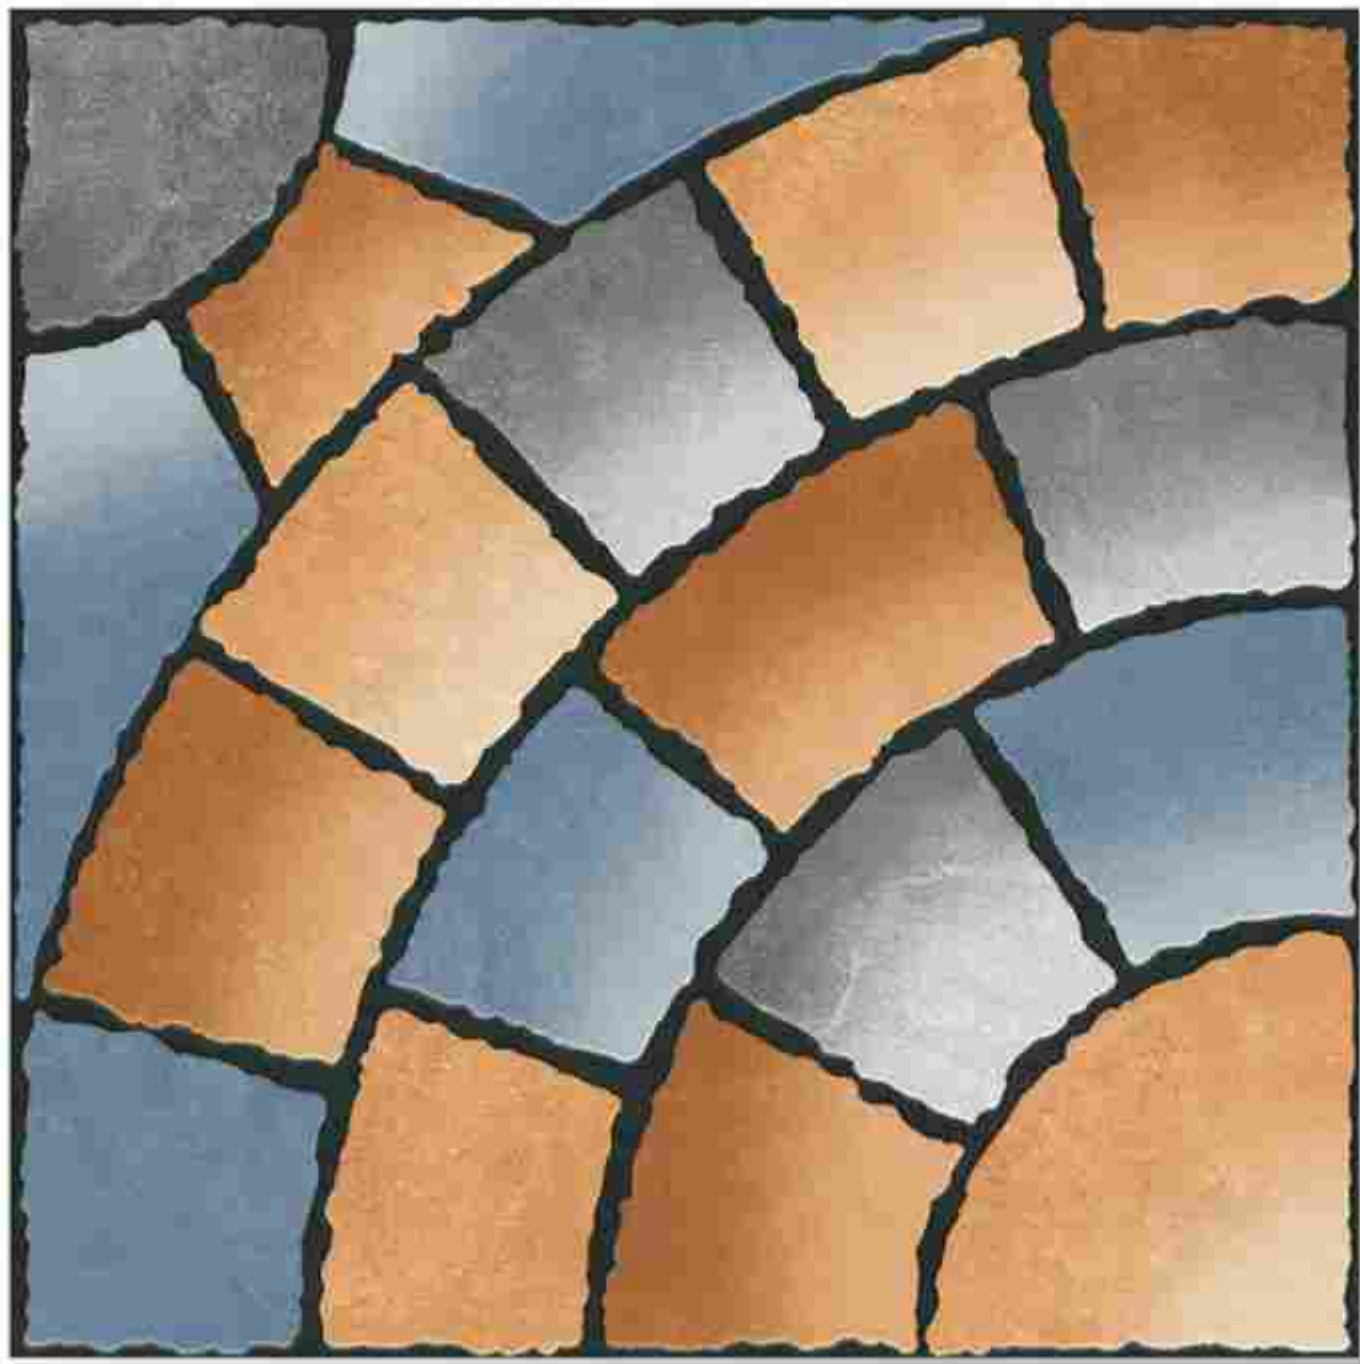

2027 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

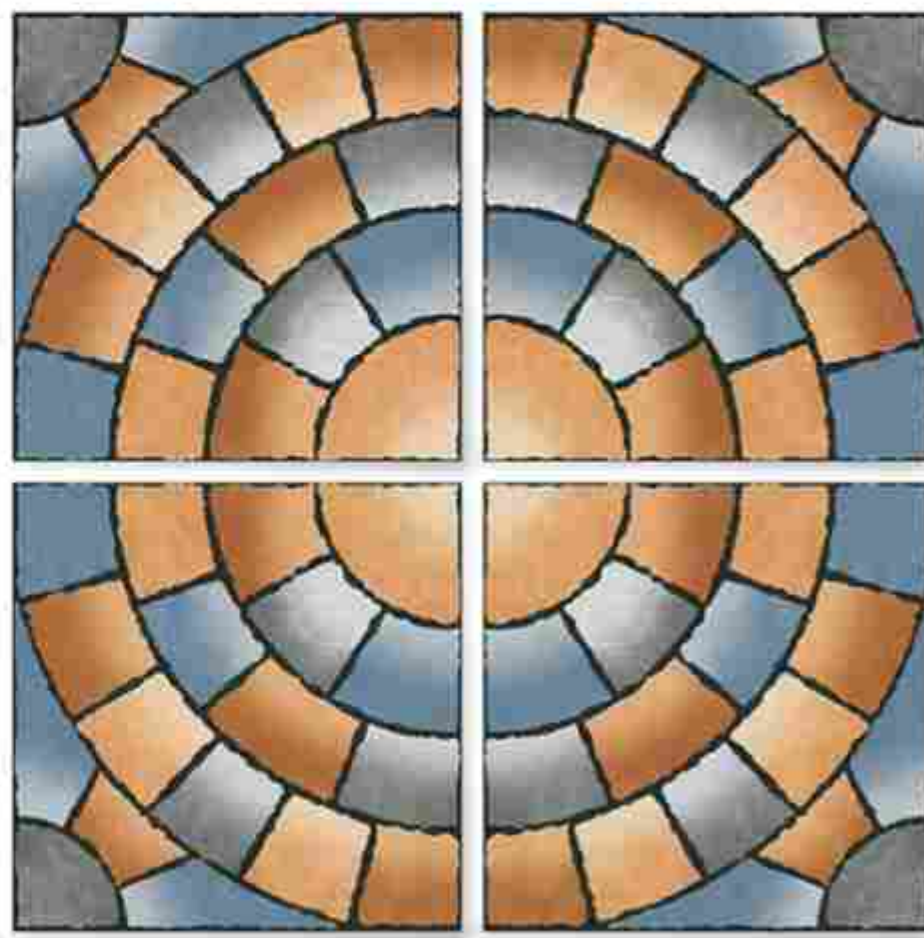

Applications








2028 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

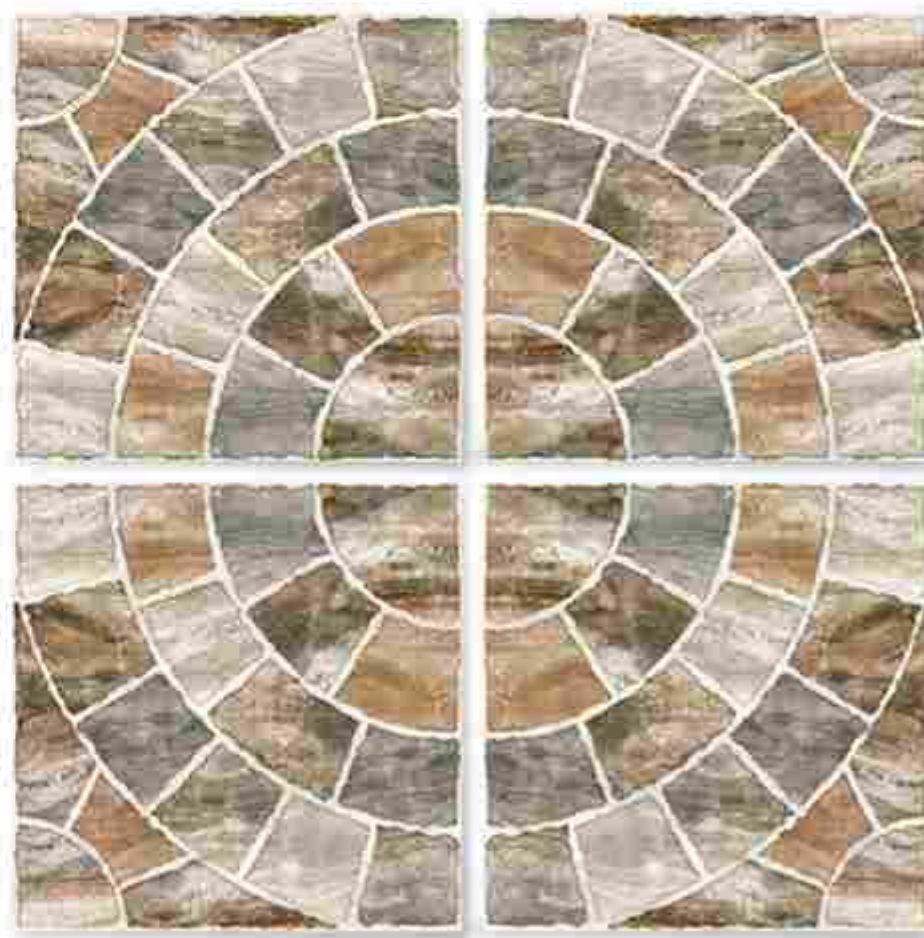

Applications








2029 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

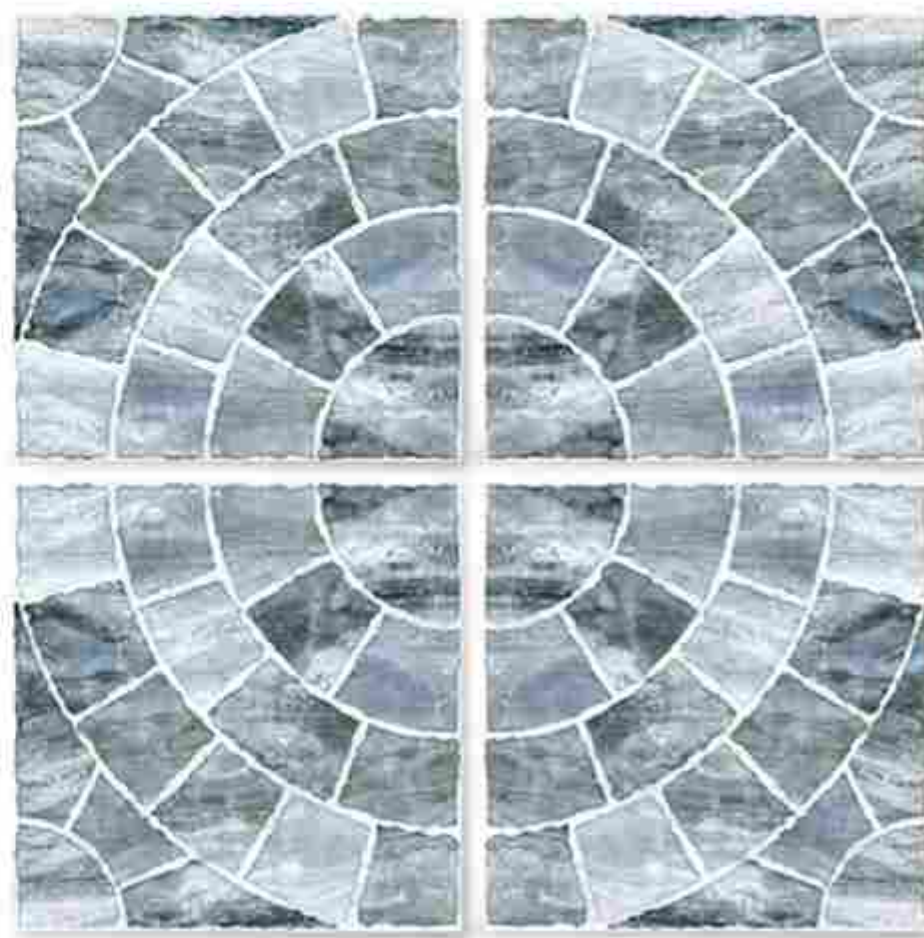


Applications





2030 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

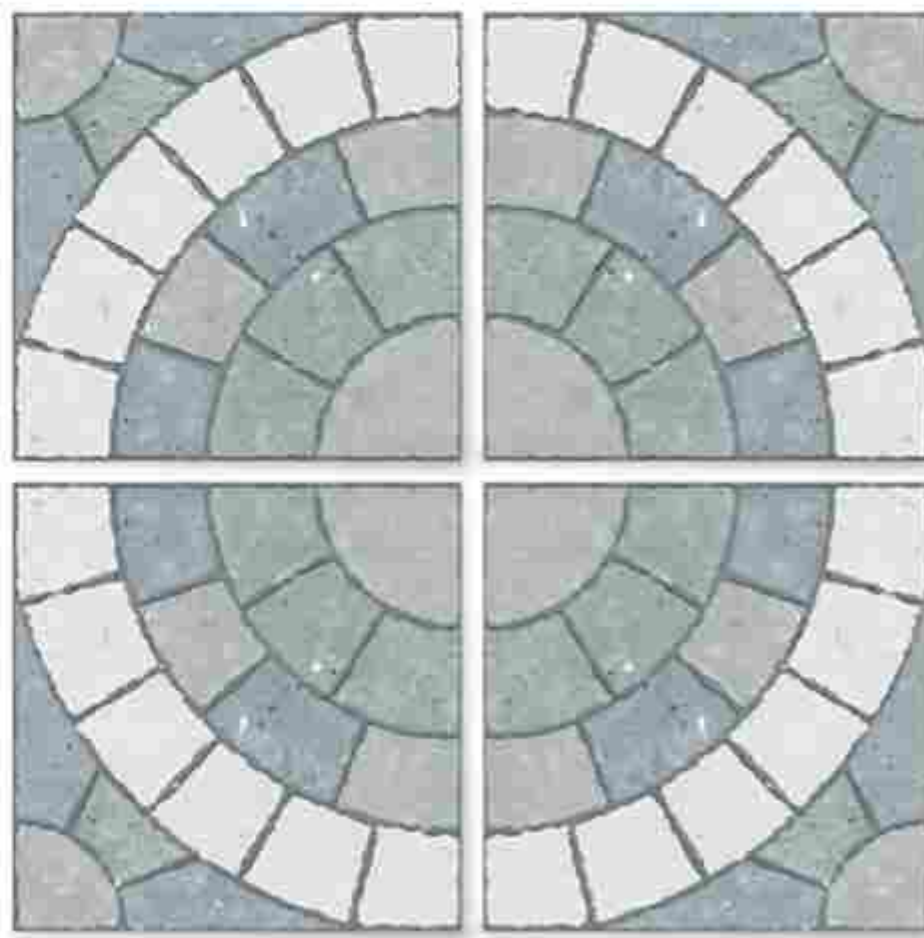


Applications





2031 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

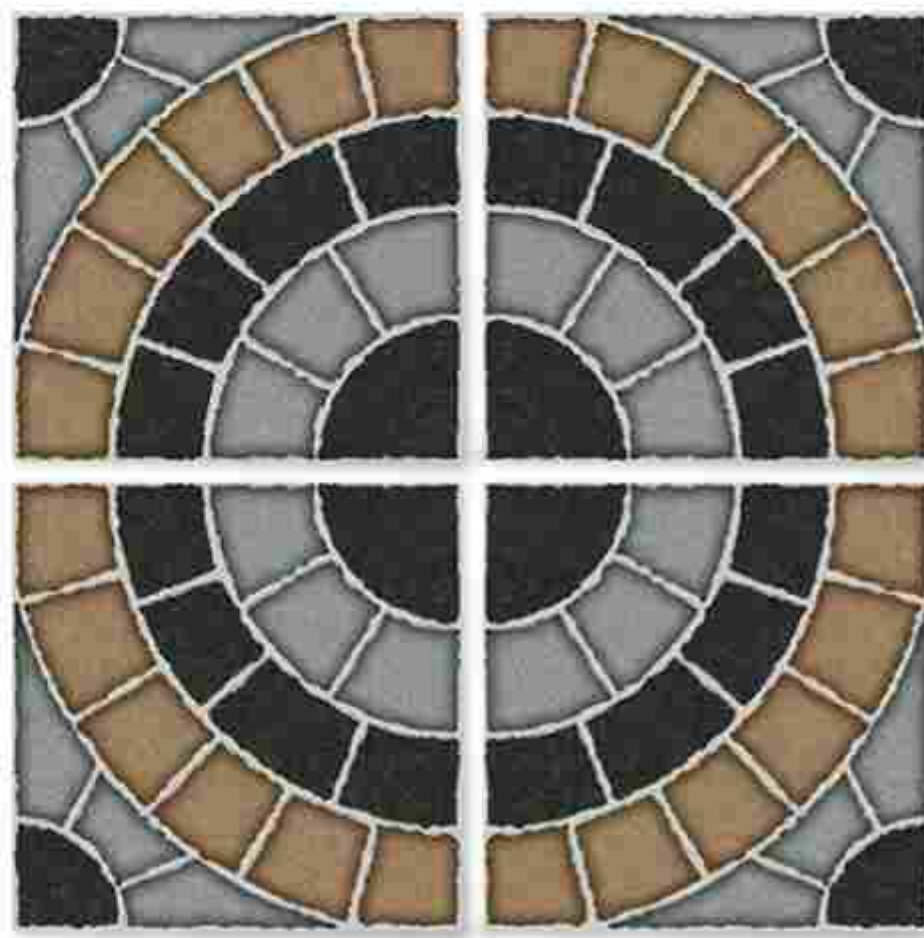

Applications








2032 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

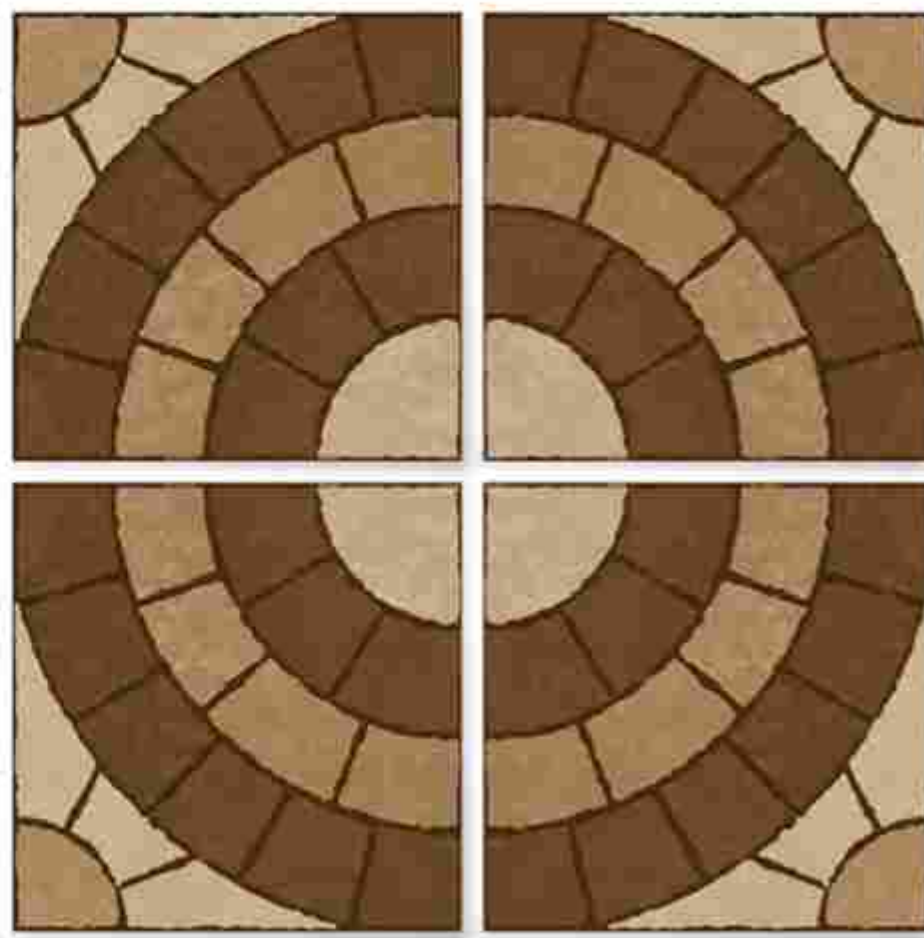

Applications





2024 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications


-  Residences
-  Commercial
-  Hotels & Restaurants
-  Public Area





2034 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

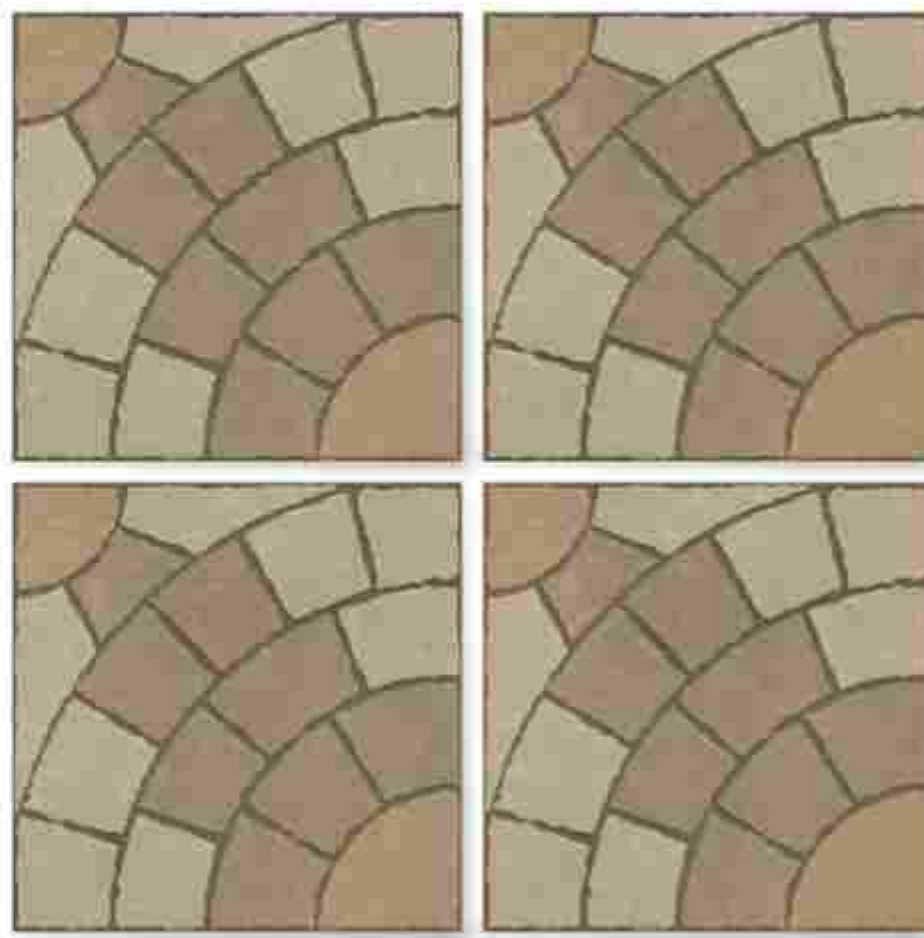

Applications








2035 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

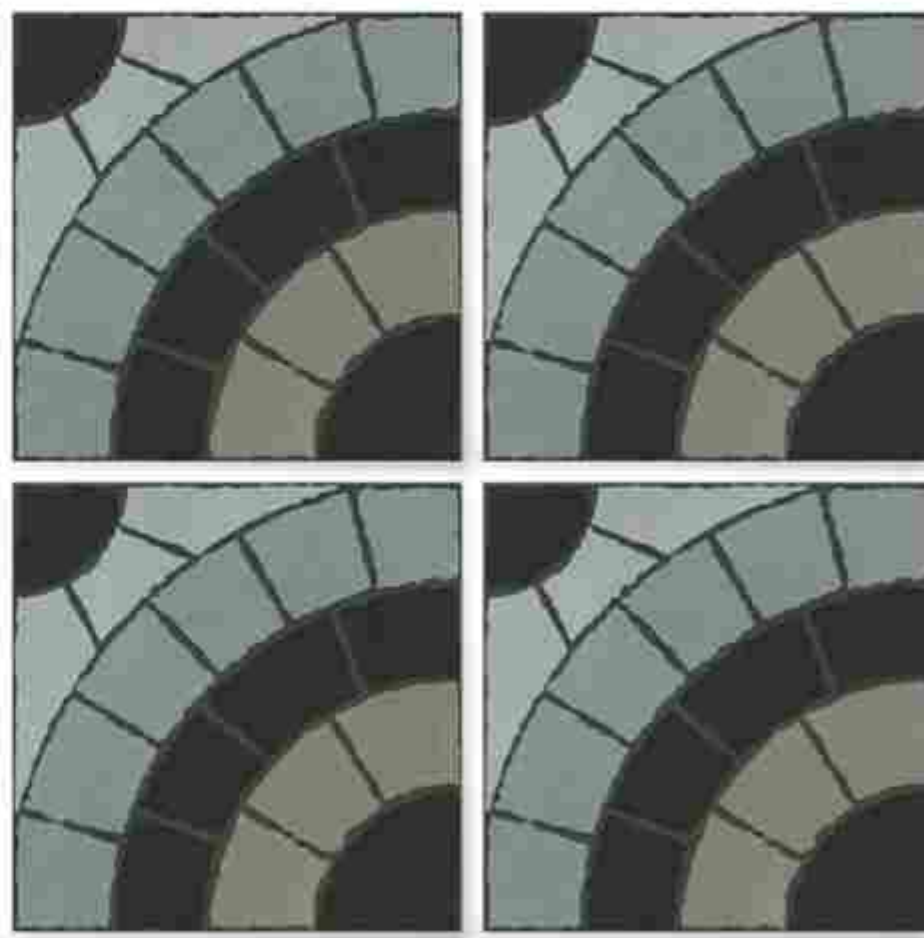

Applications





TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group Bla	SAKET TILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 400X400MM	12 MM	5 PCS	0.8	18 Kgs
1.	DIGITAL 400X400MM	10 MM	5 PCS	0.8	16 Kgs

Thank you



www.pooraboverseas.com export.pooraboverseas.com