
**PARKING
VITRIFIED
TILES**

400x

400MM


40x 40cm

| PARKING VITRIFIED TILES


.....

All about an adventurous tile which has immense toughness with great look that complements every area.



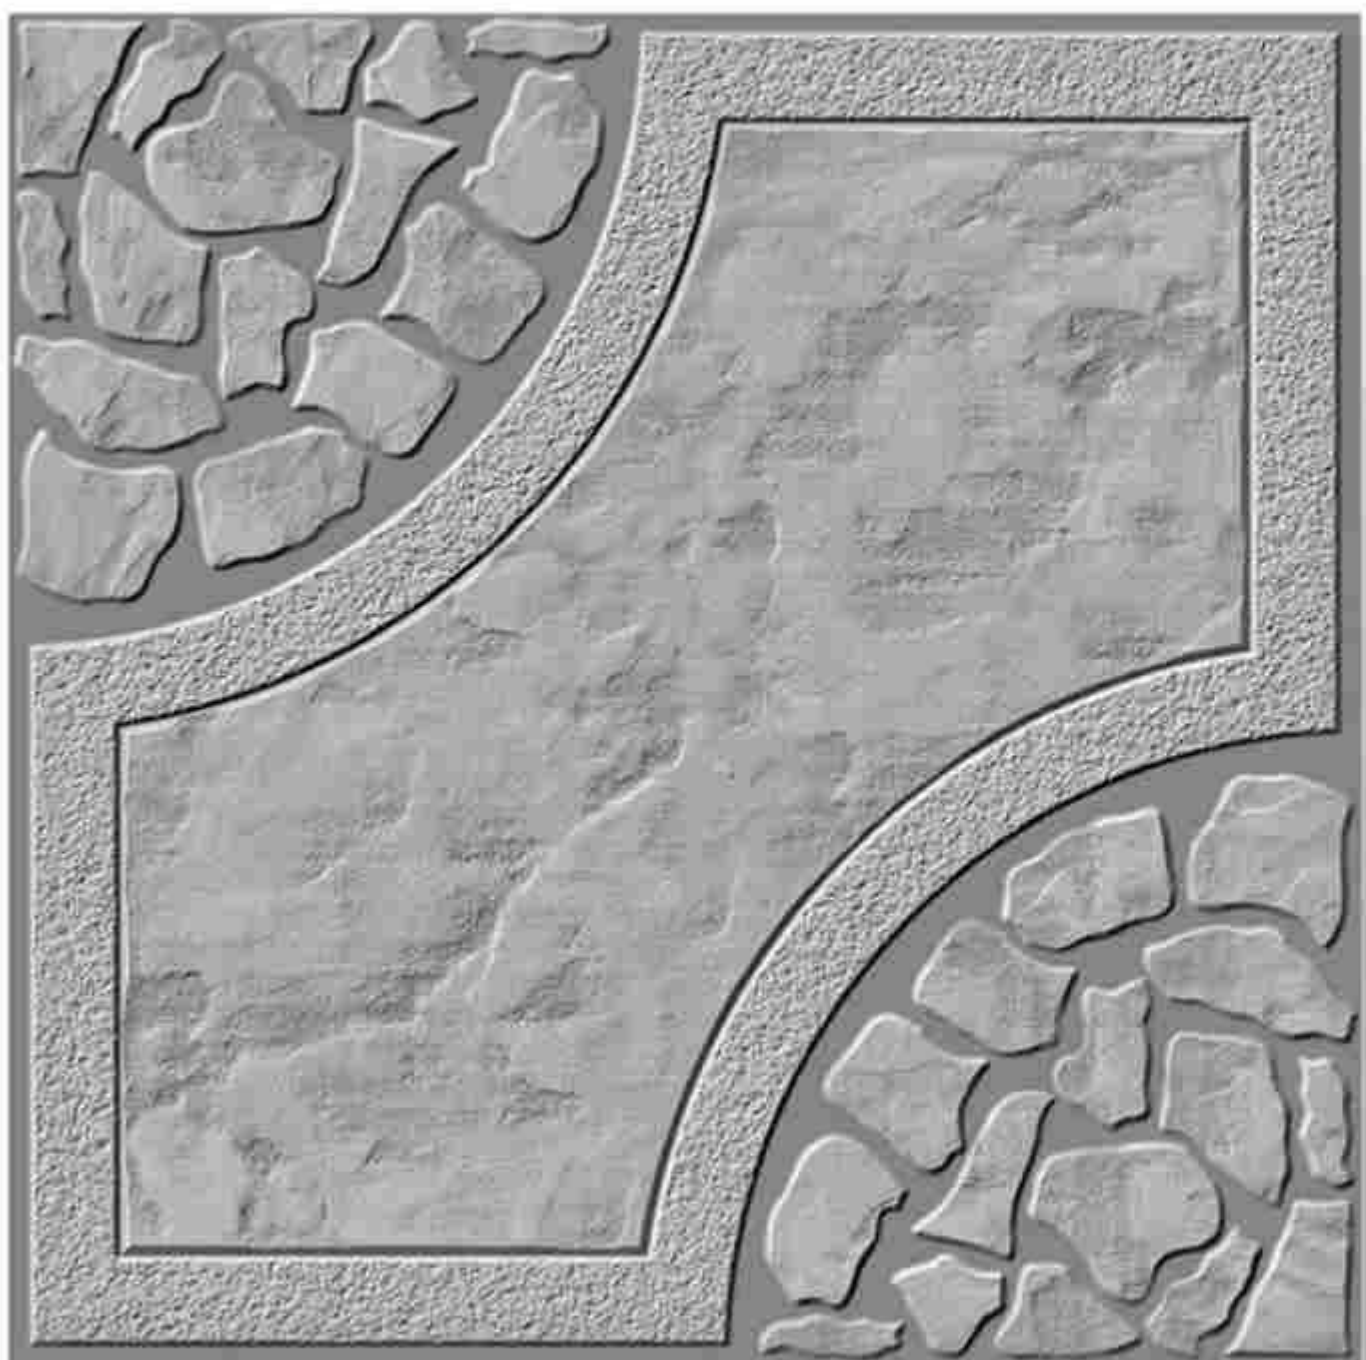

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

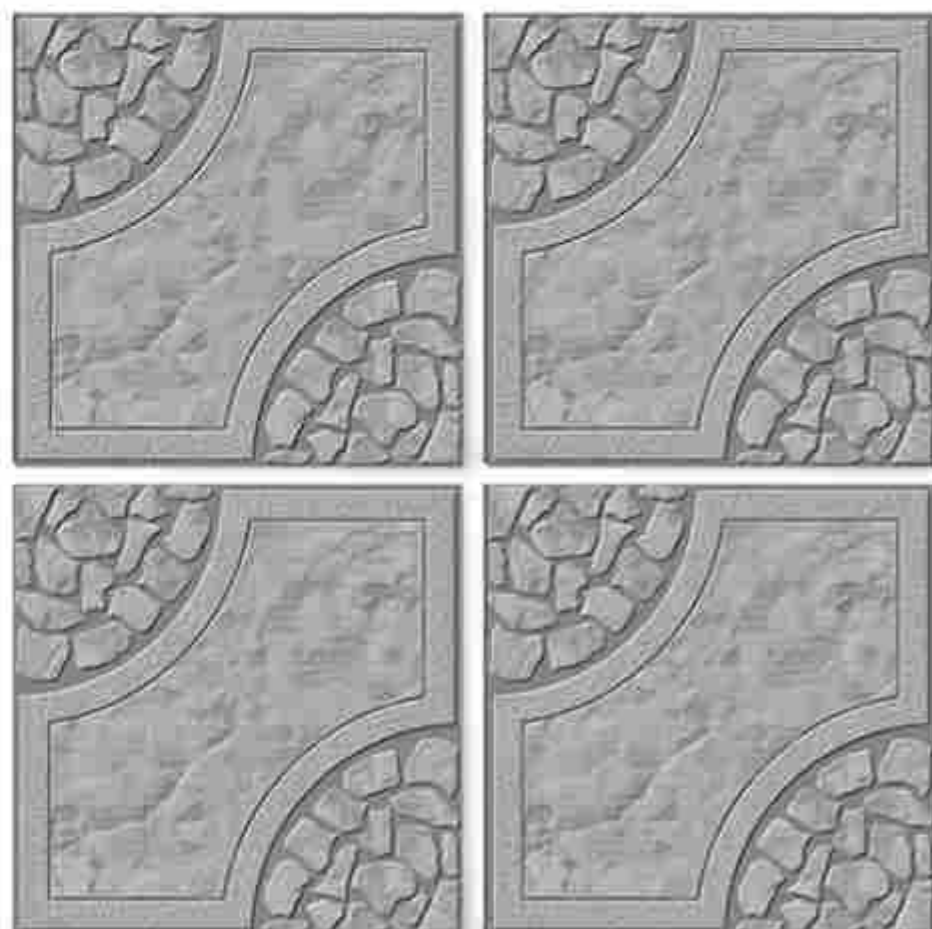

Applications





2201

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








2202


Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

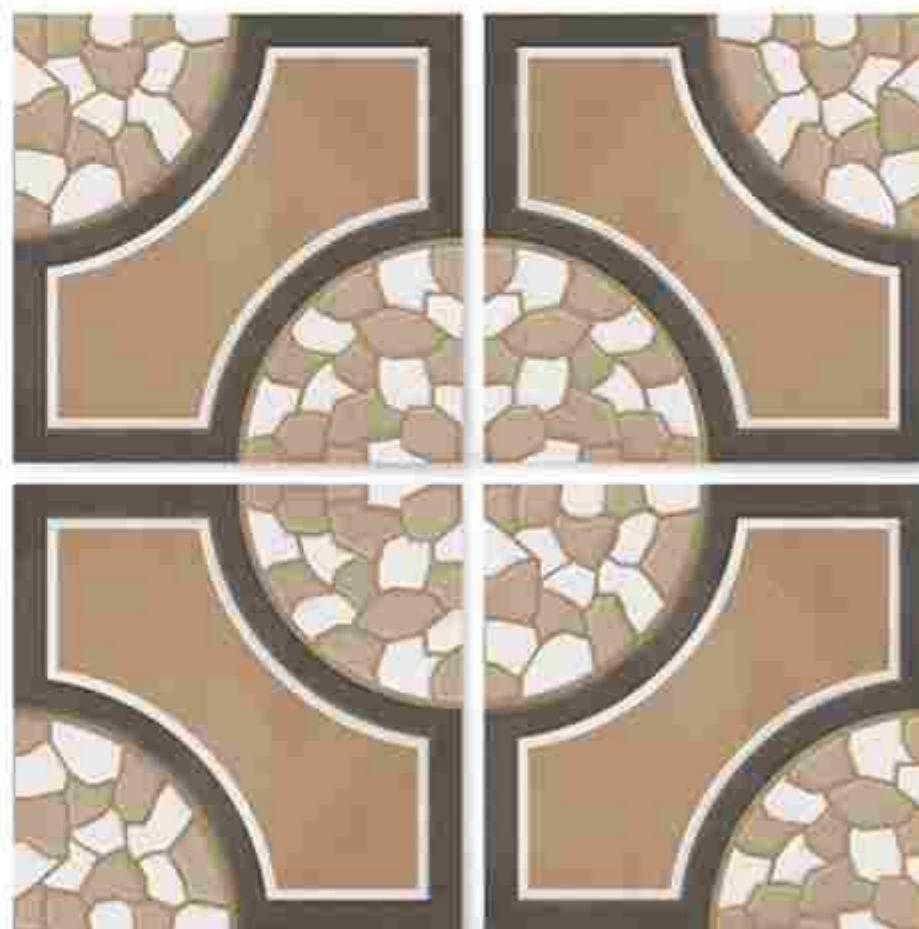

Applications






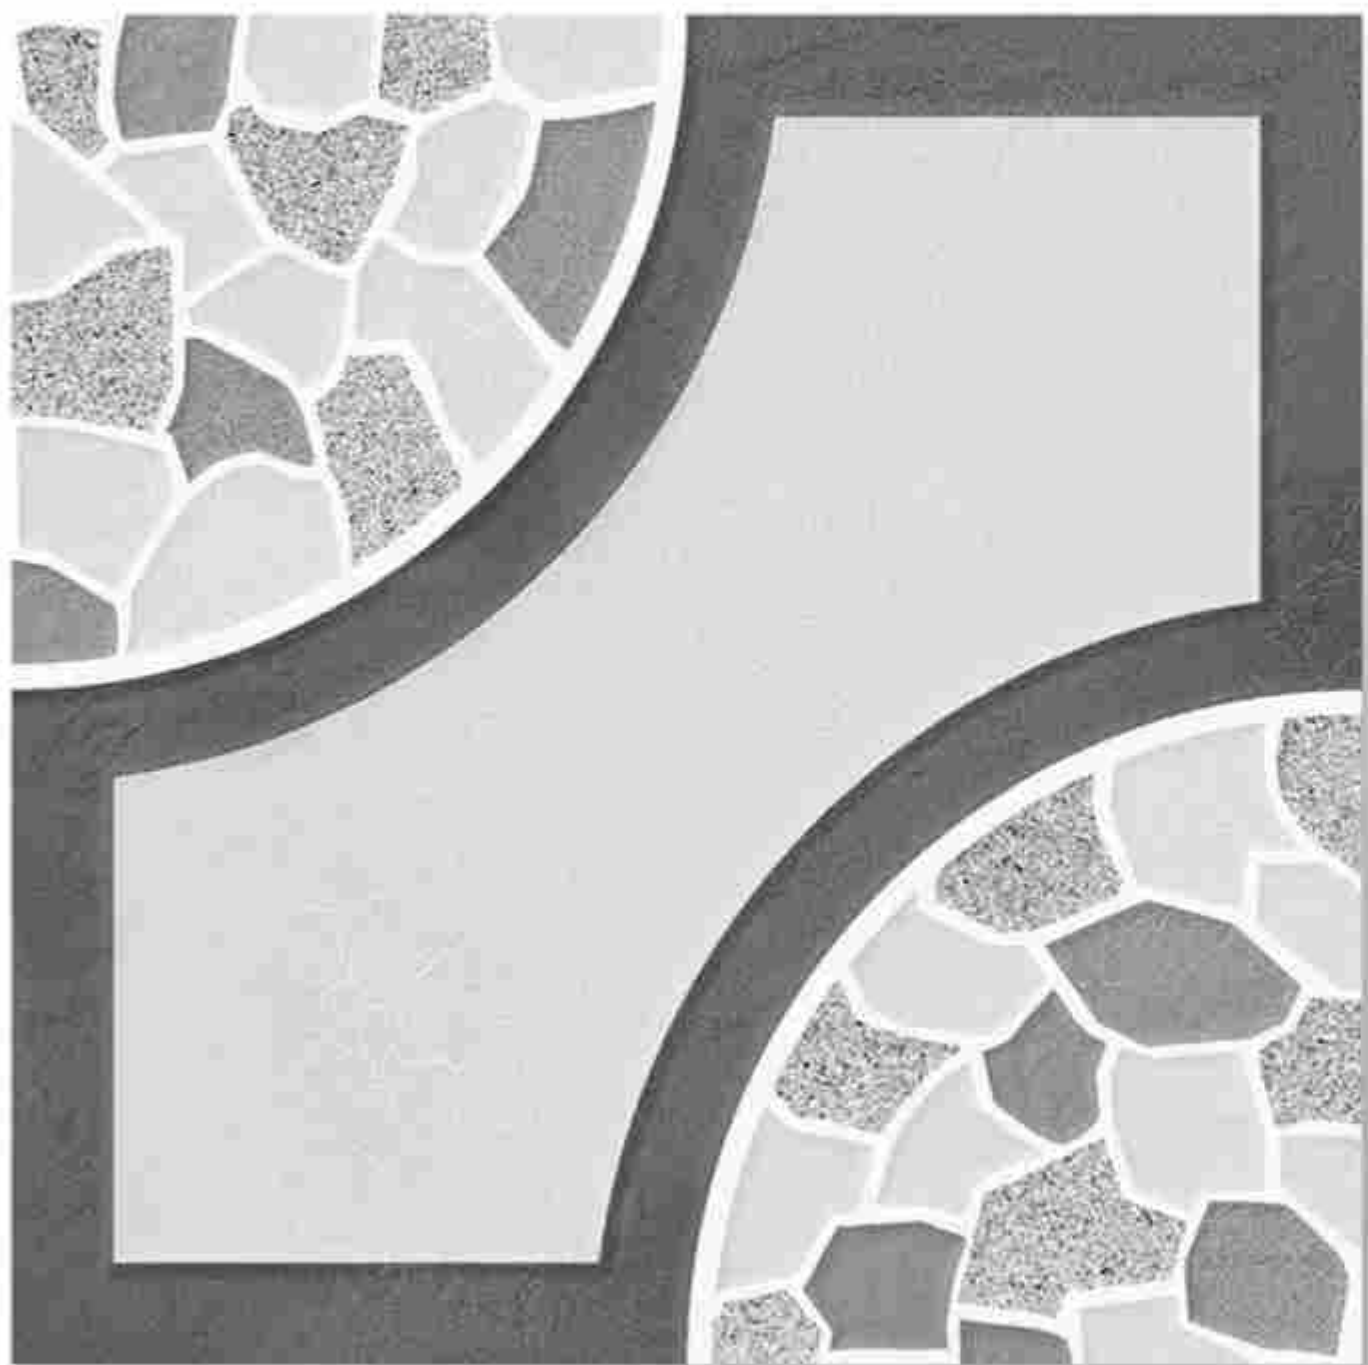

2203

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

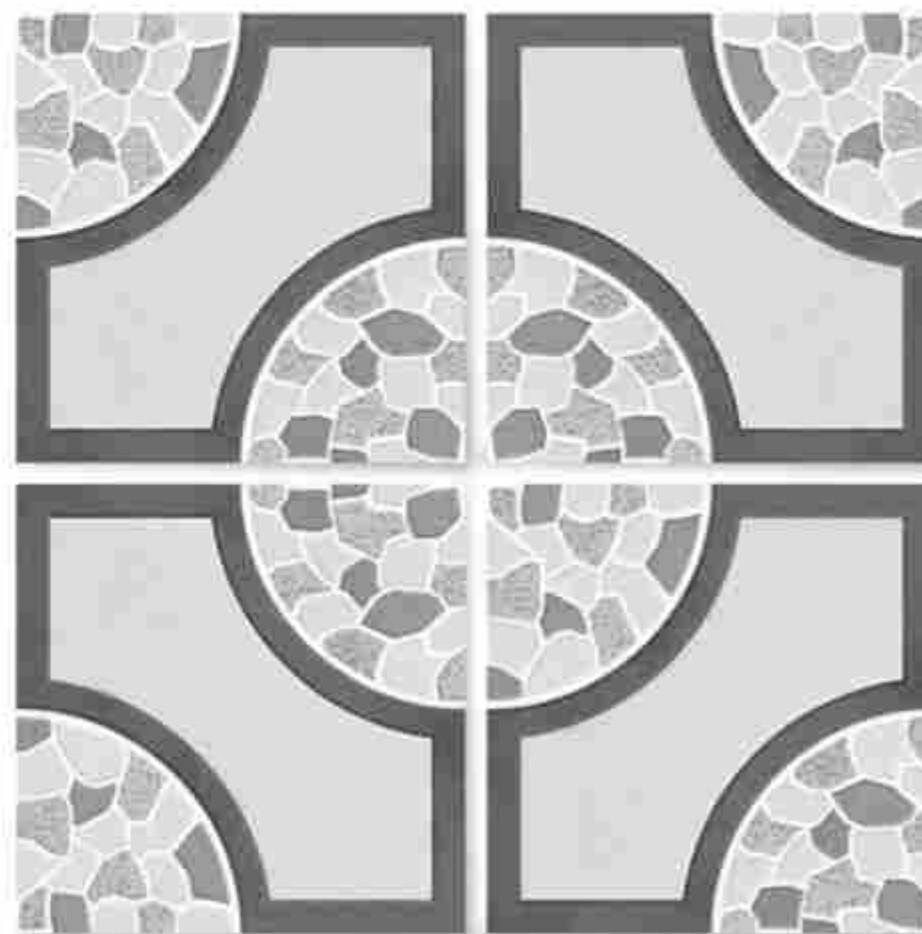

Applications







2204

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







2206


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications






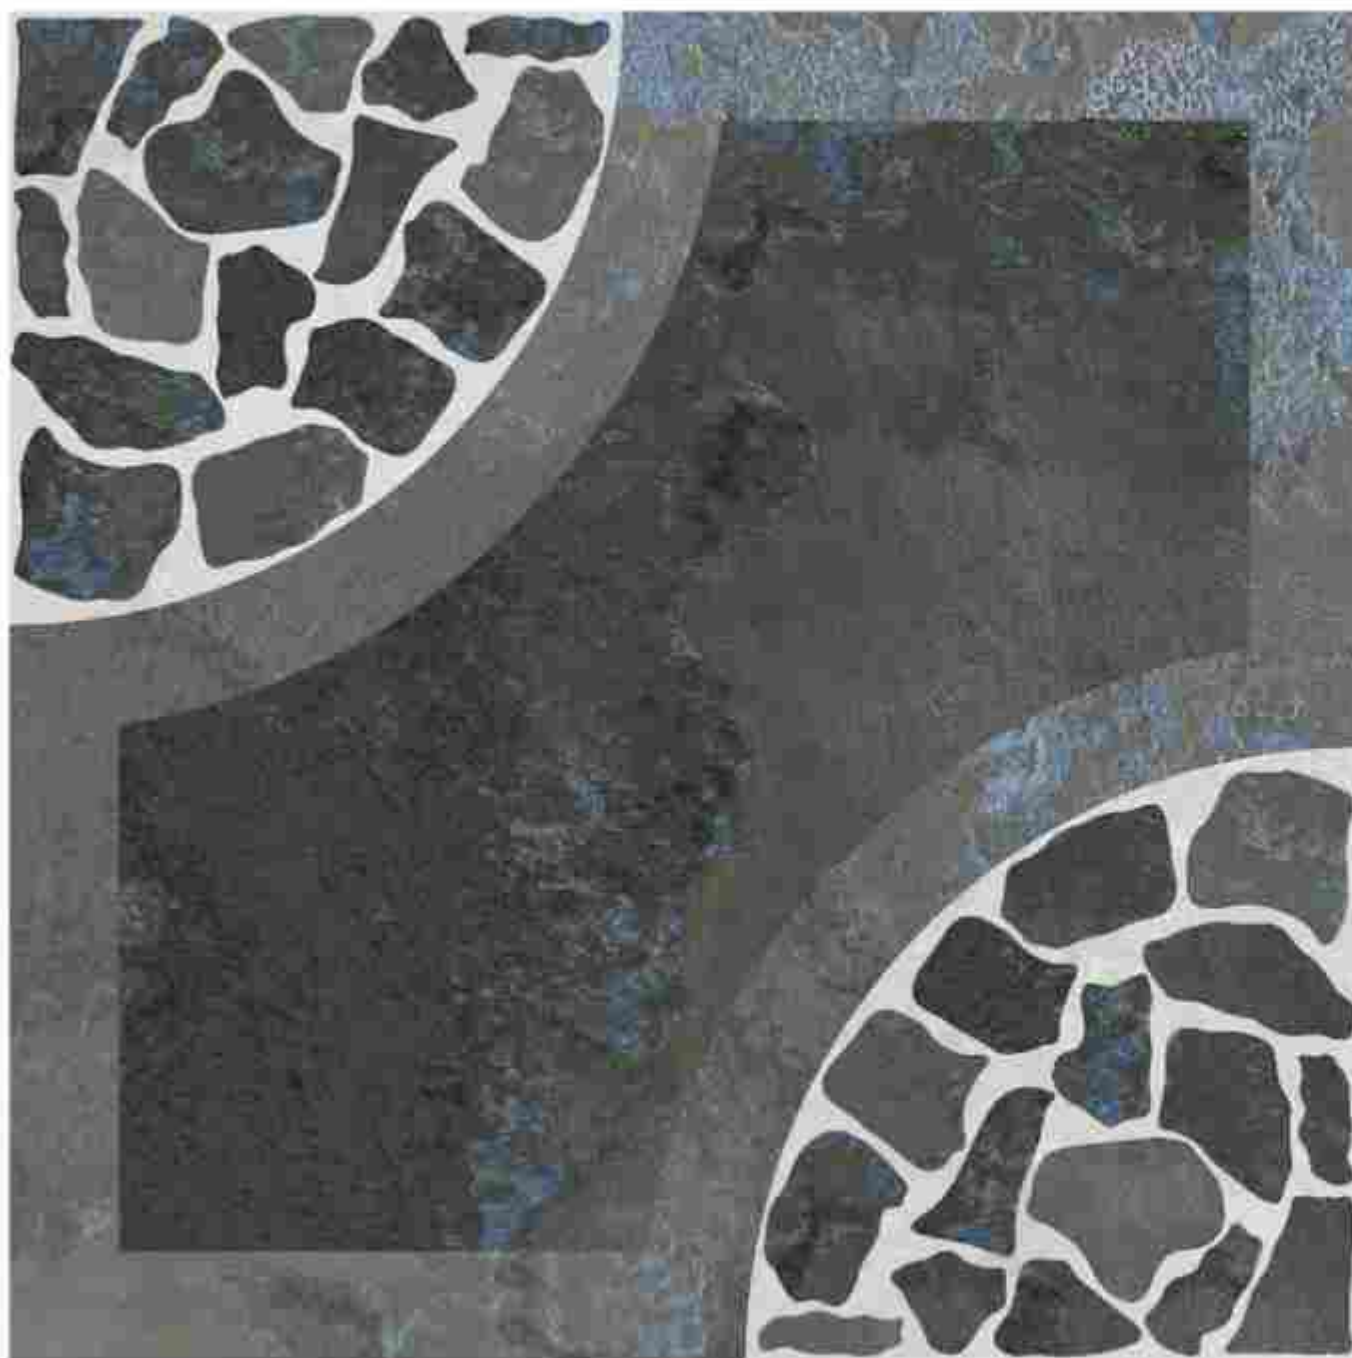


2207

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>9 mm</u>	<u>1</u>

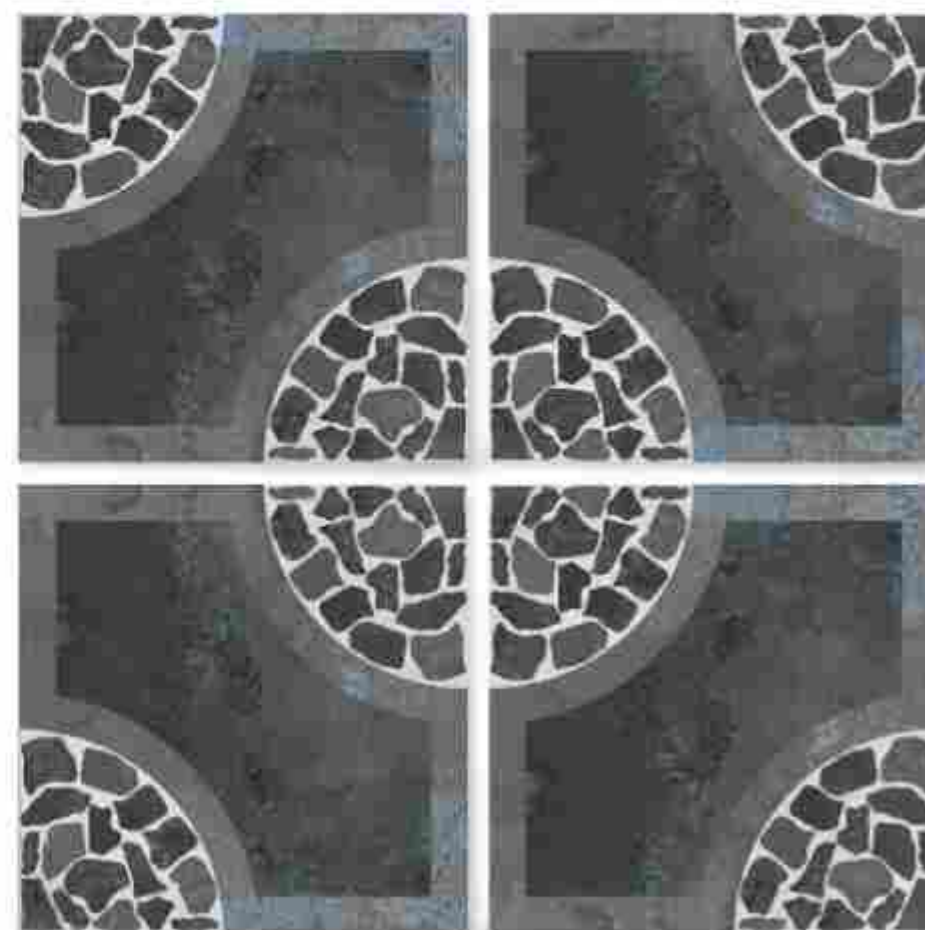

Applications




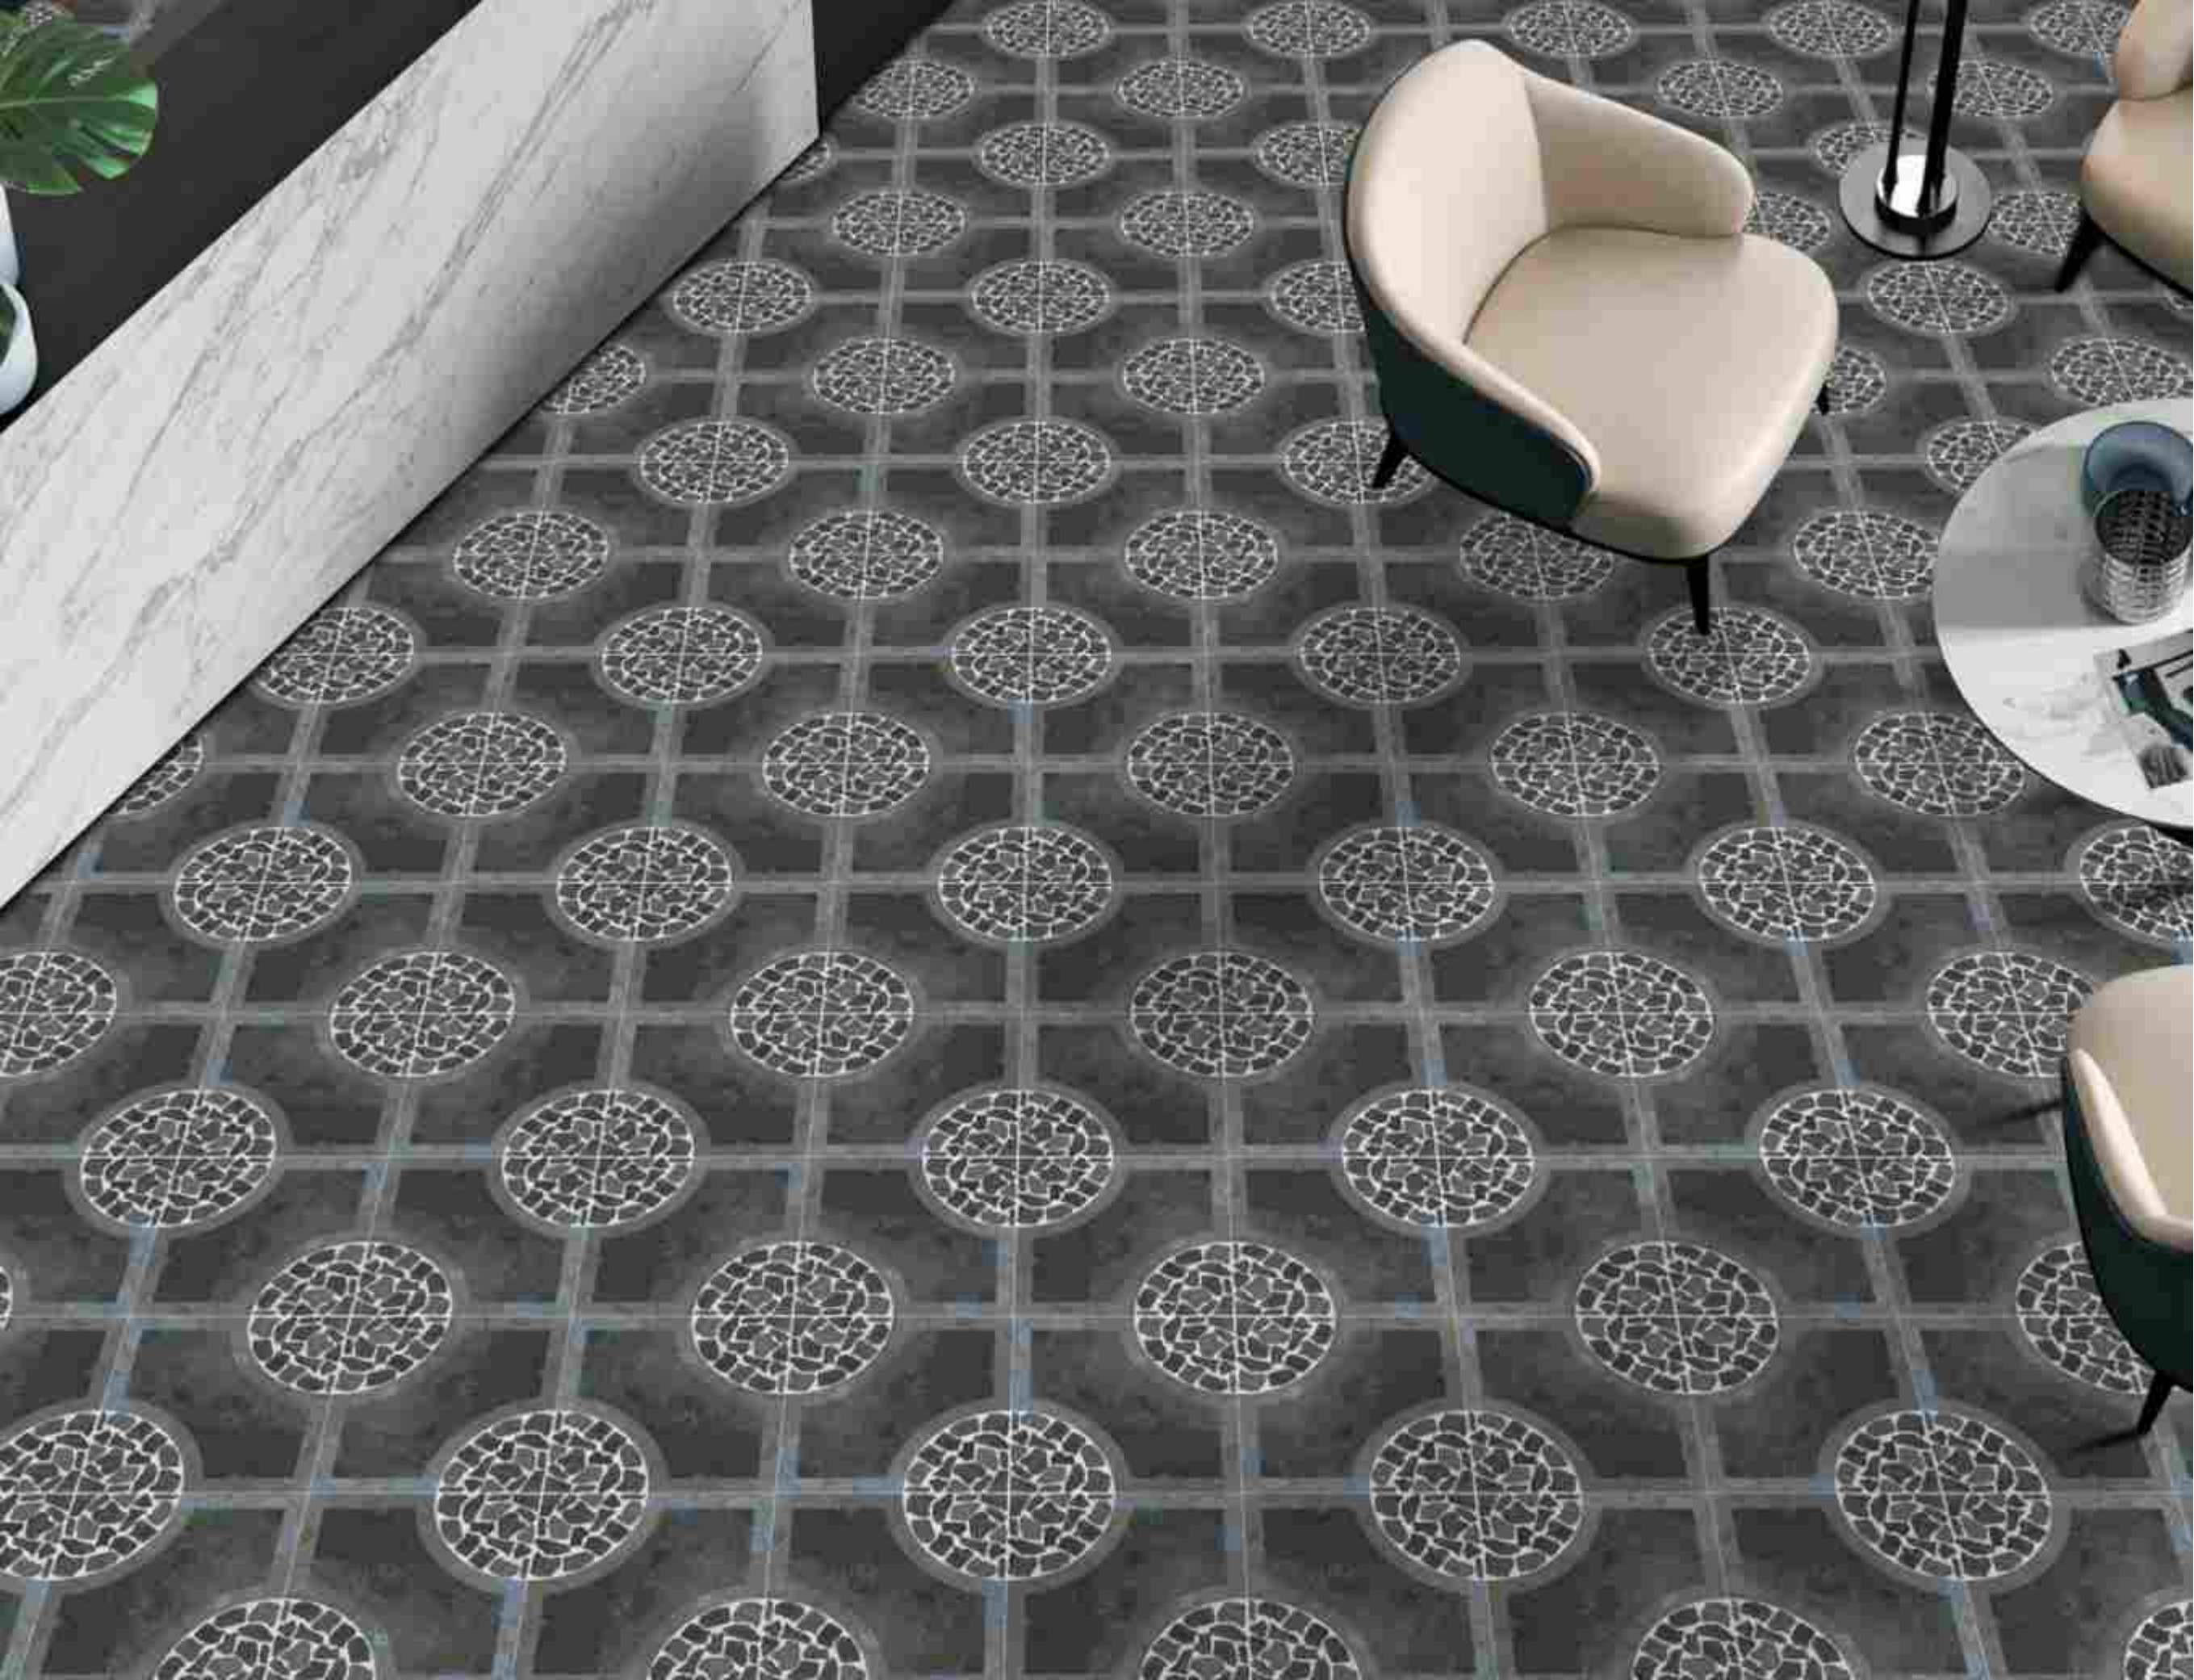



2209

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

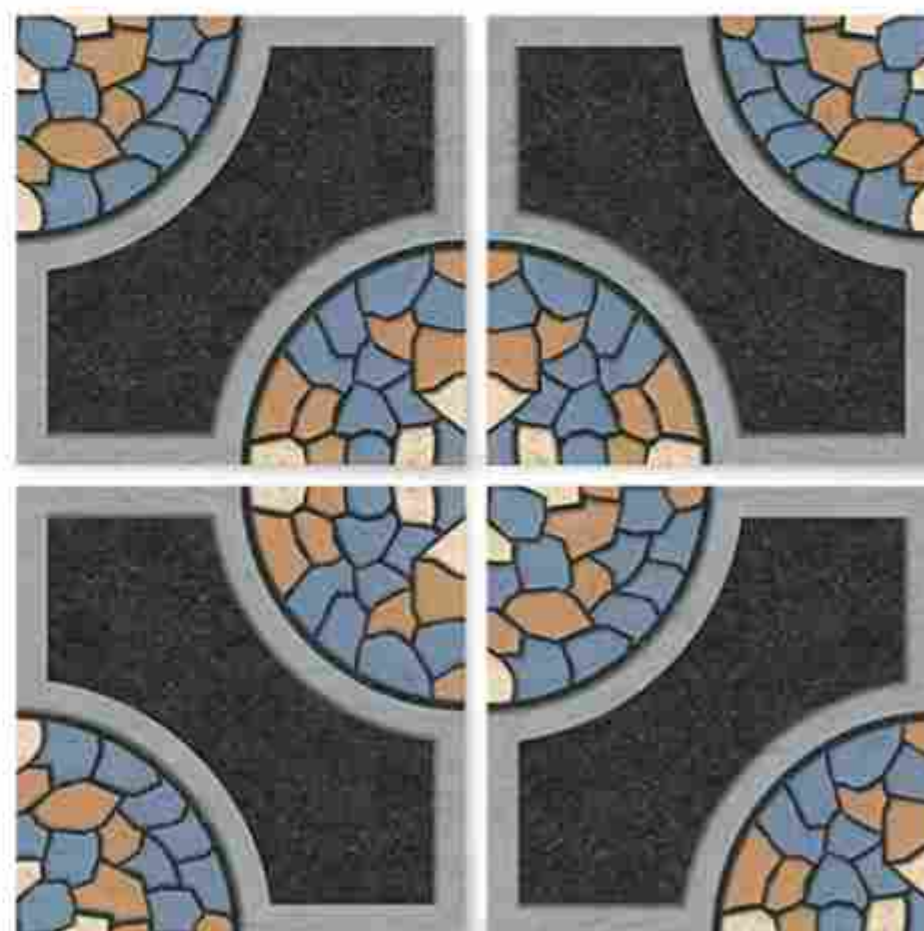

Applications







2211

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








2213

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

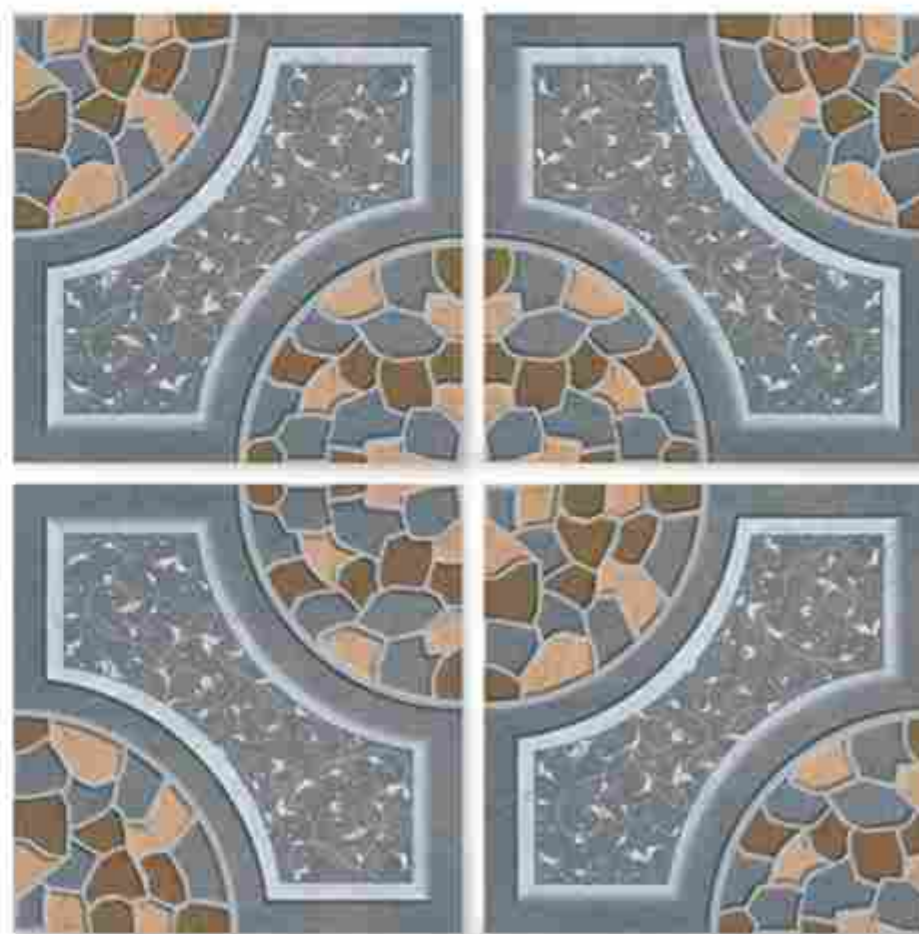

Applications







2217


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications






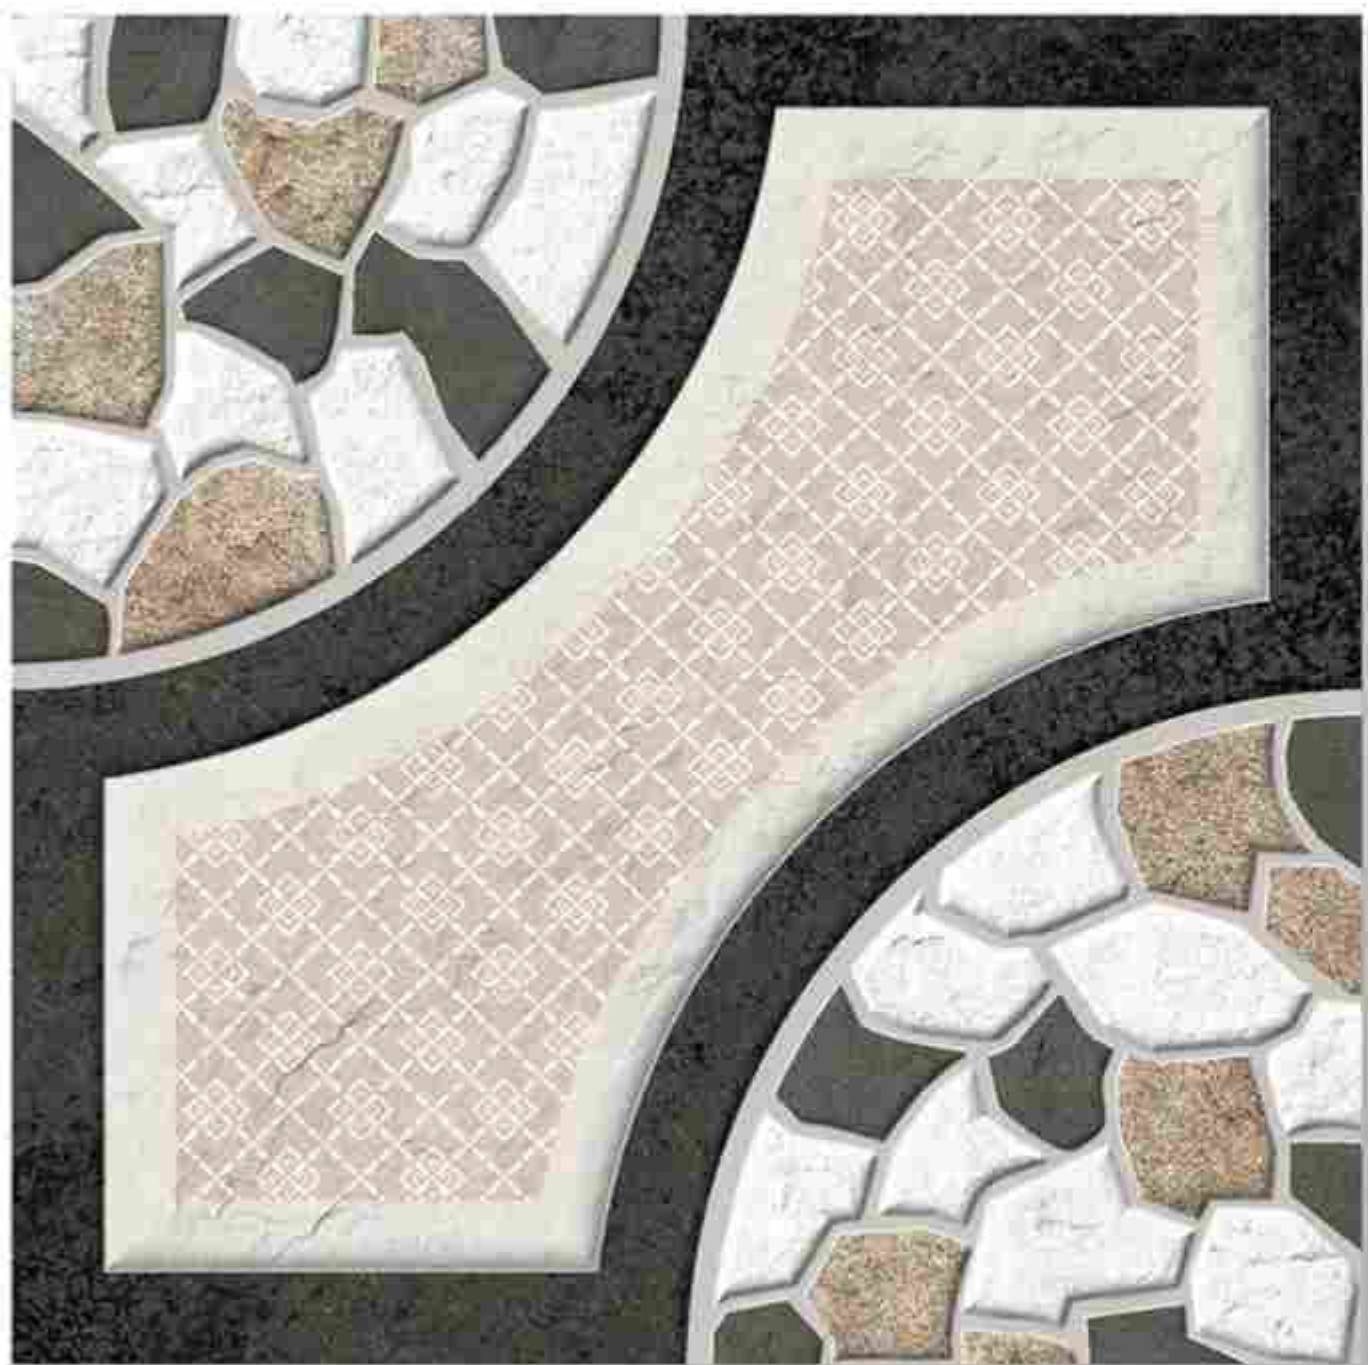

2219


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

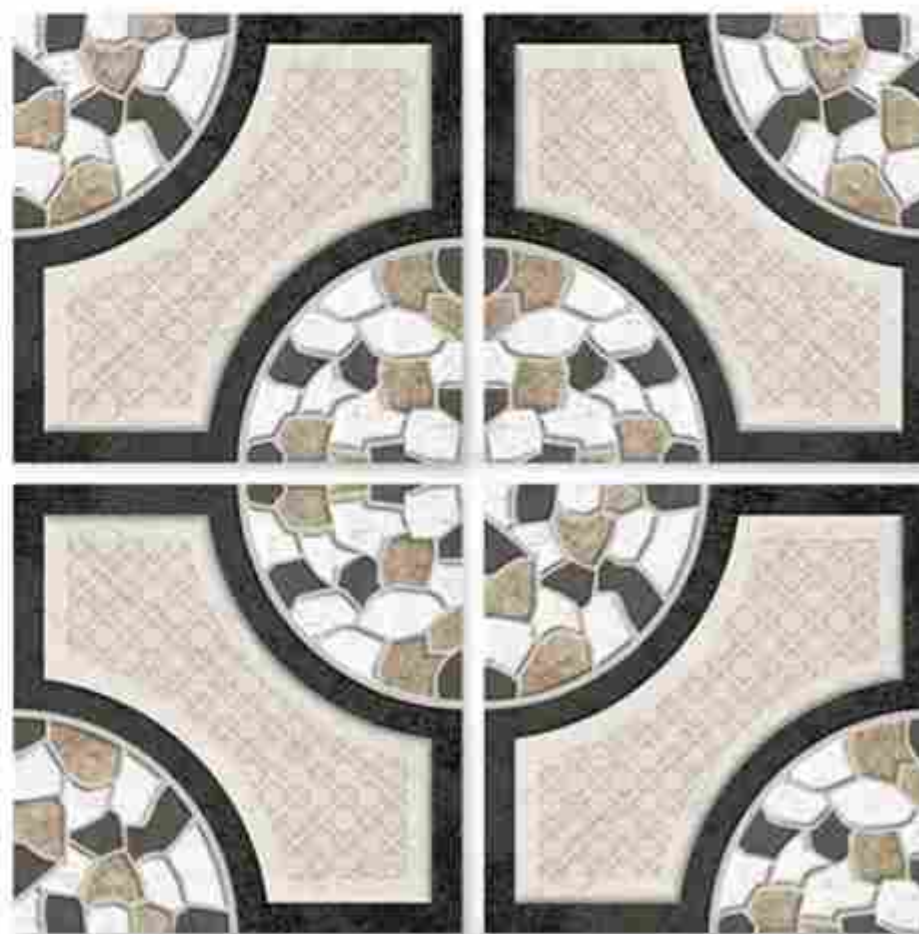

Applications






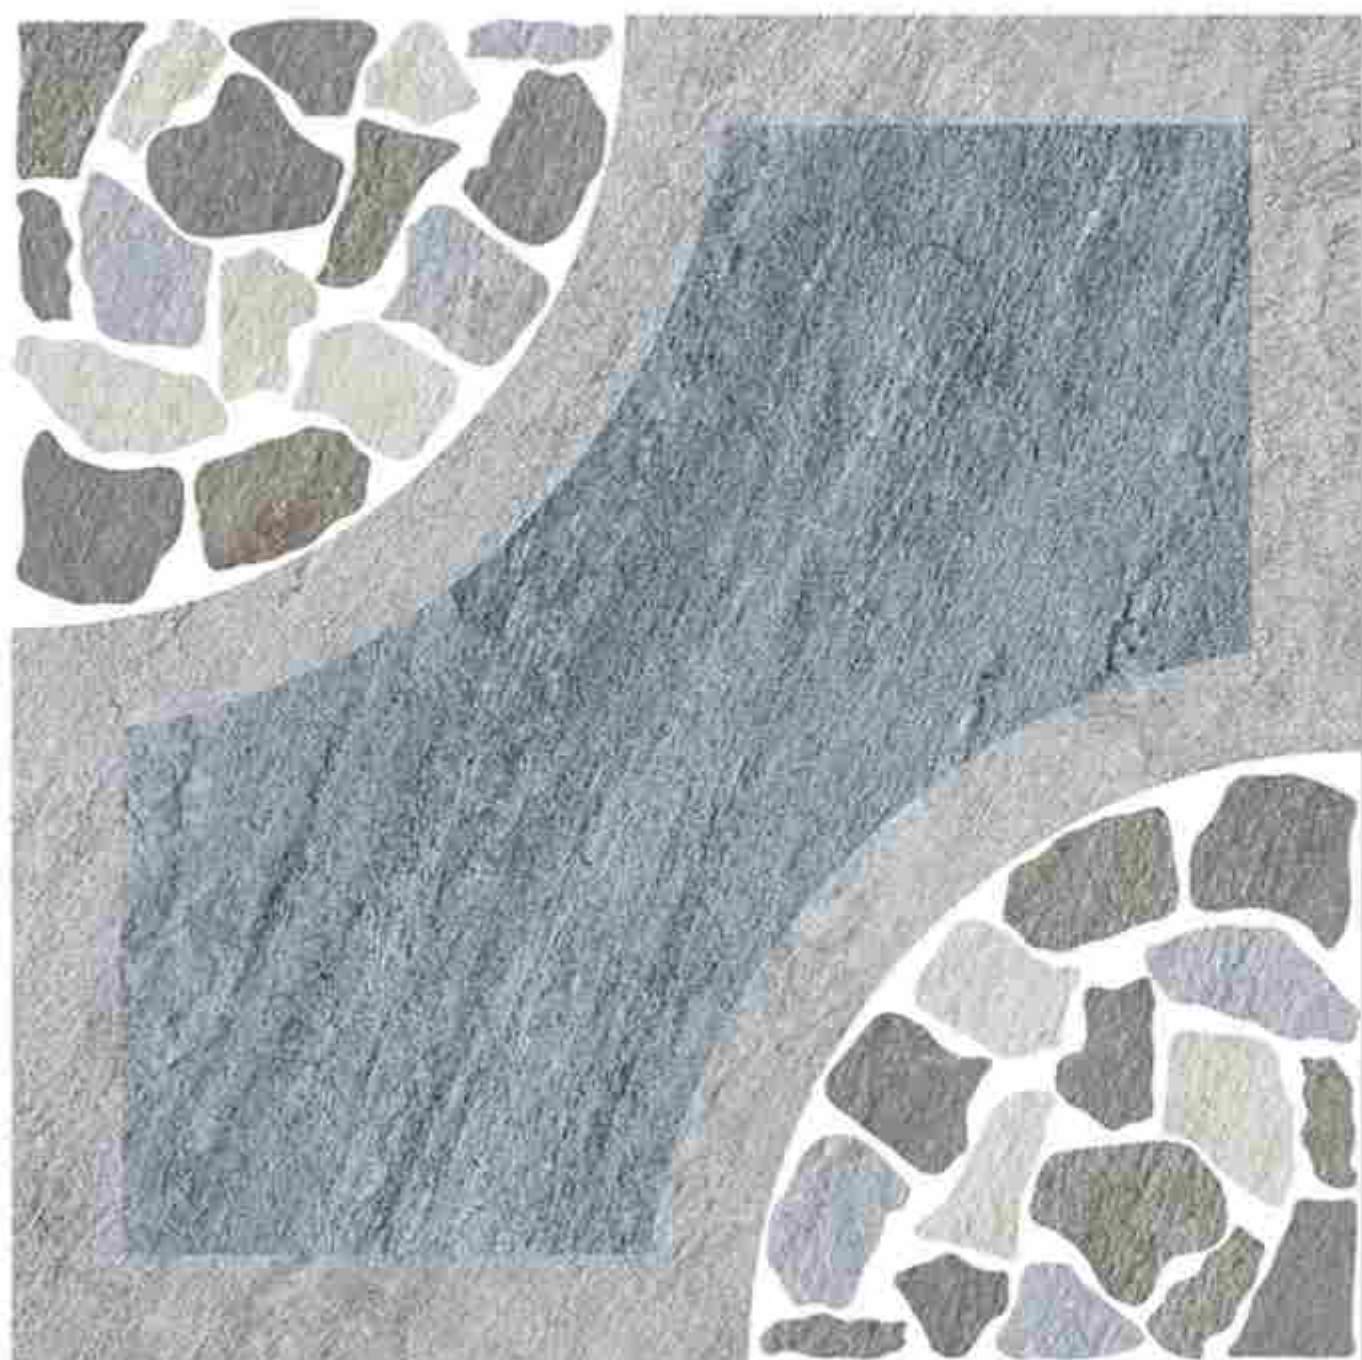

2224

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

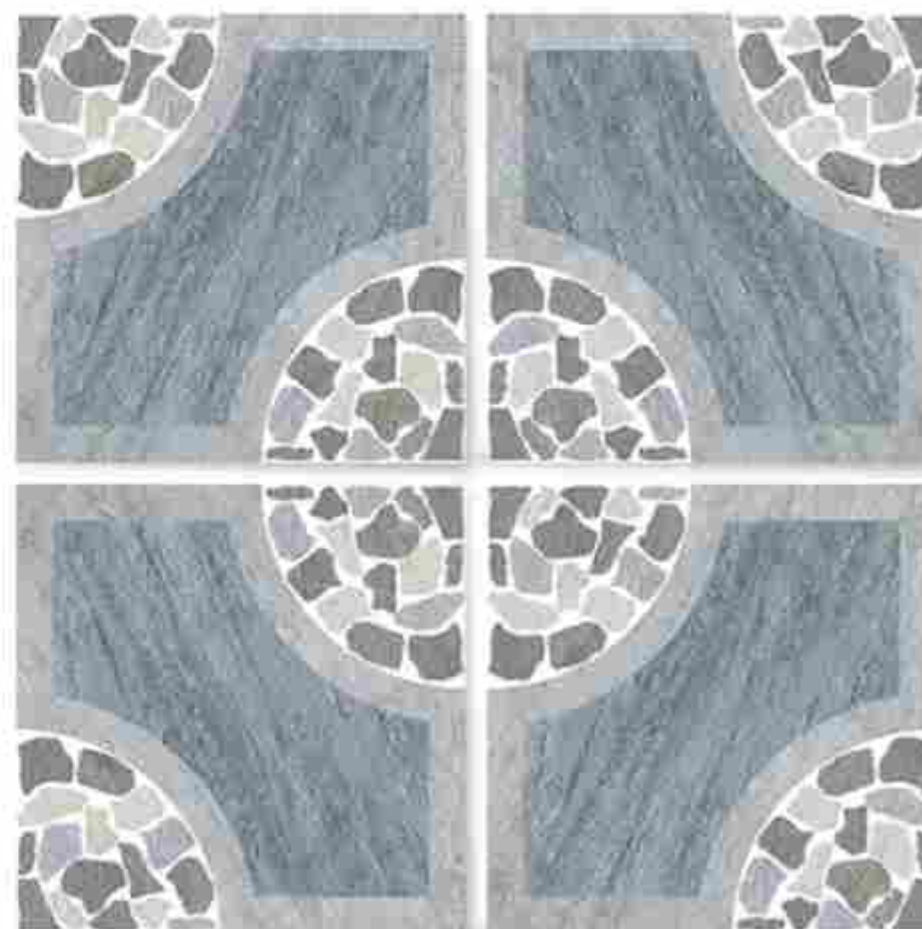

Applications








2225


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

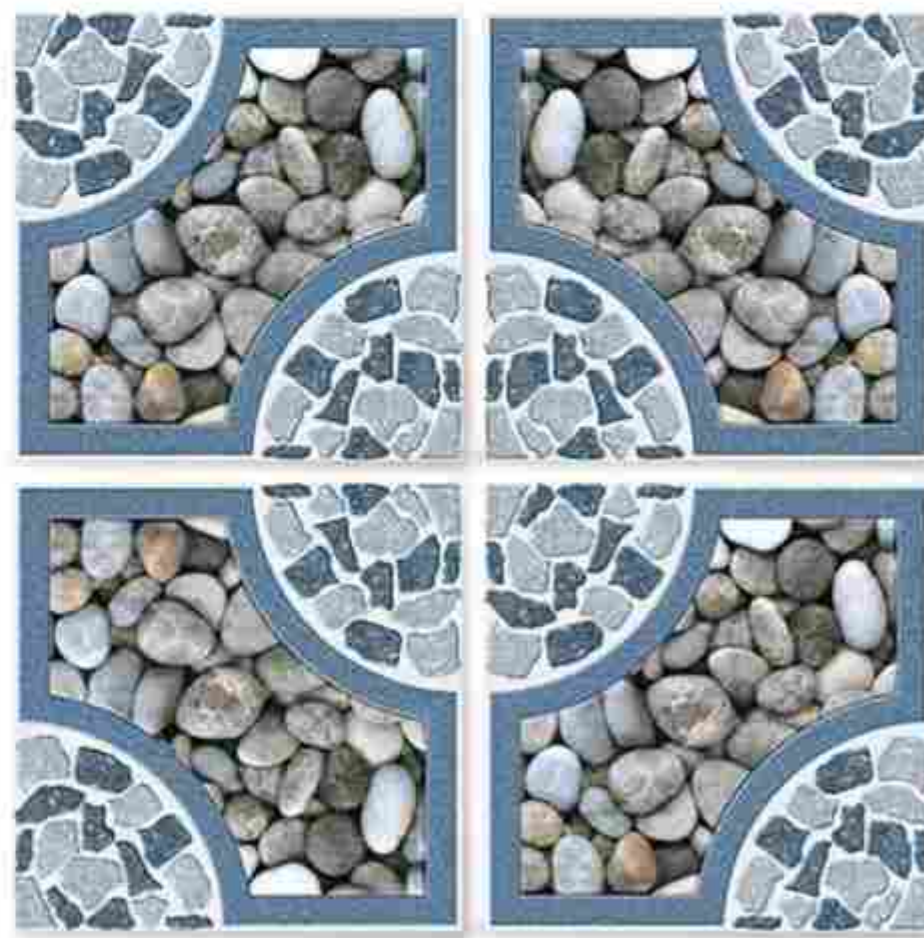


Applications





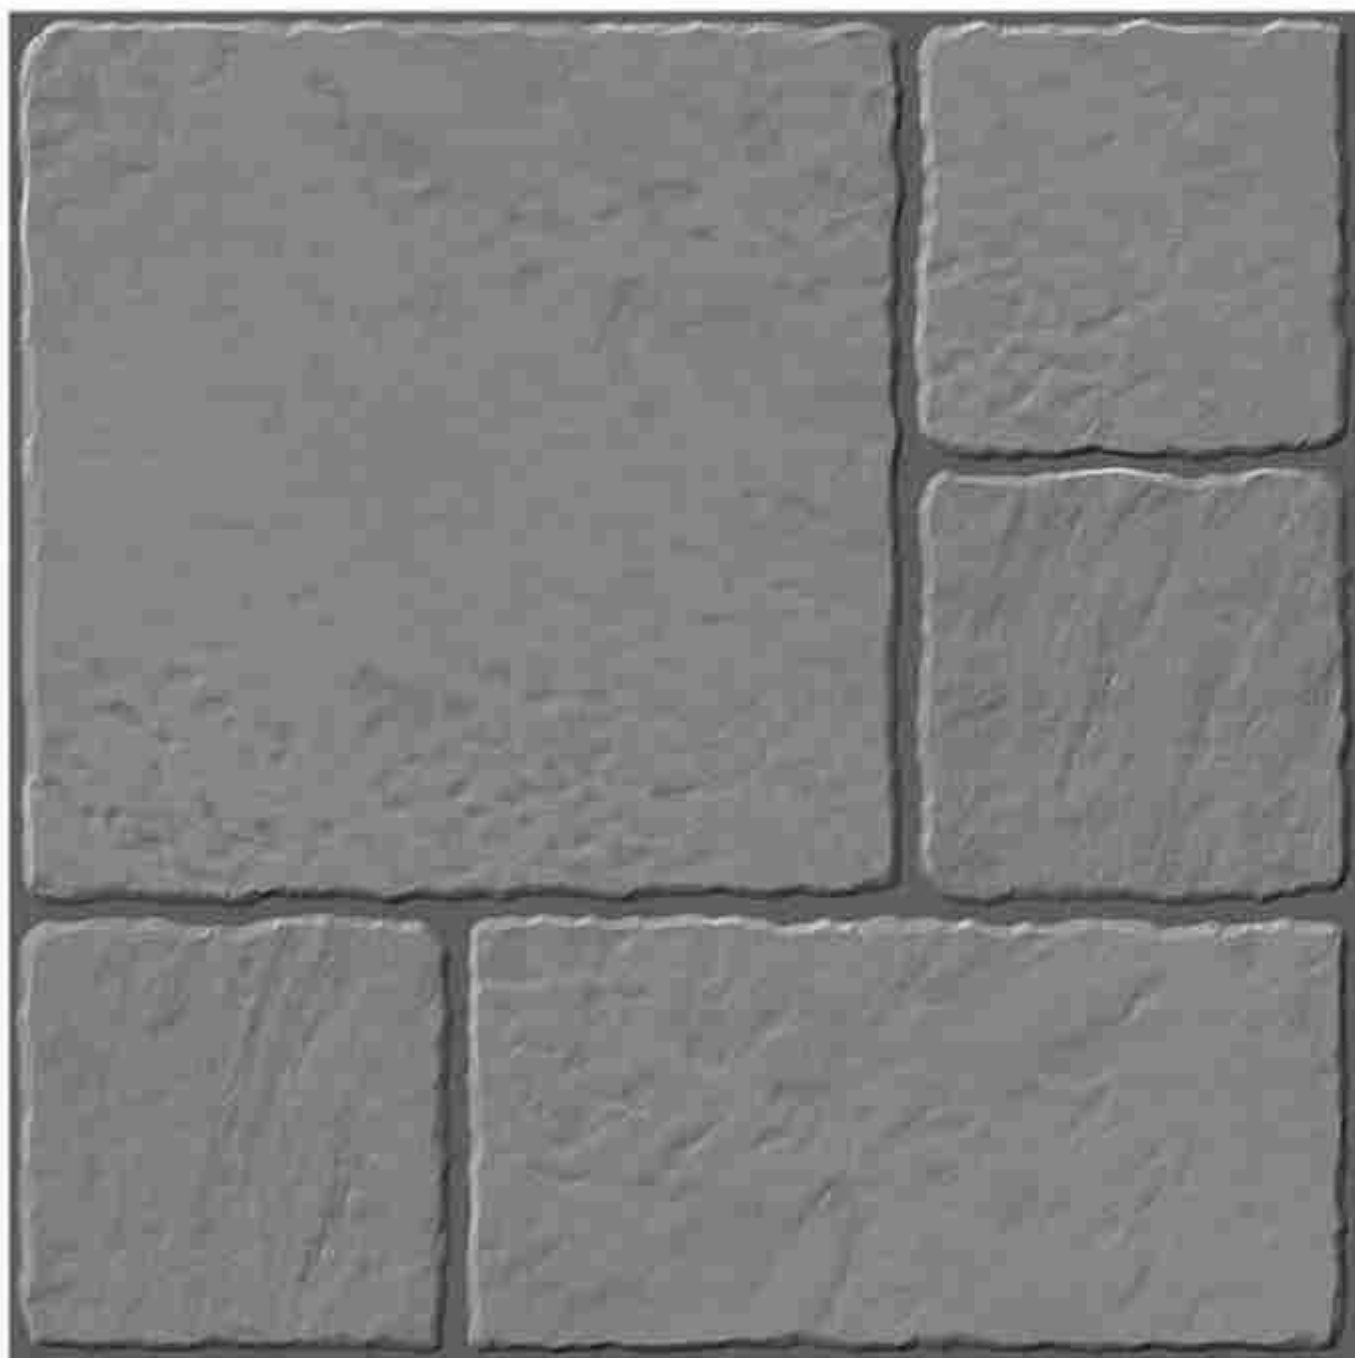

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

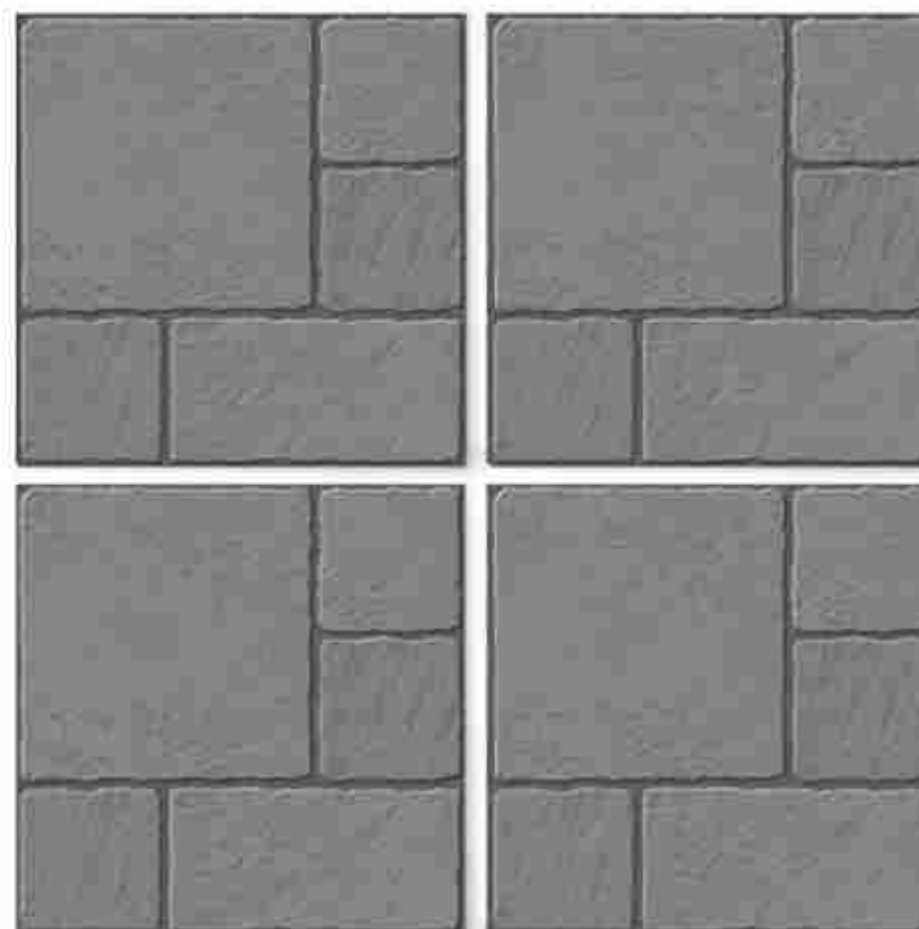


Applications





2302

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

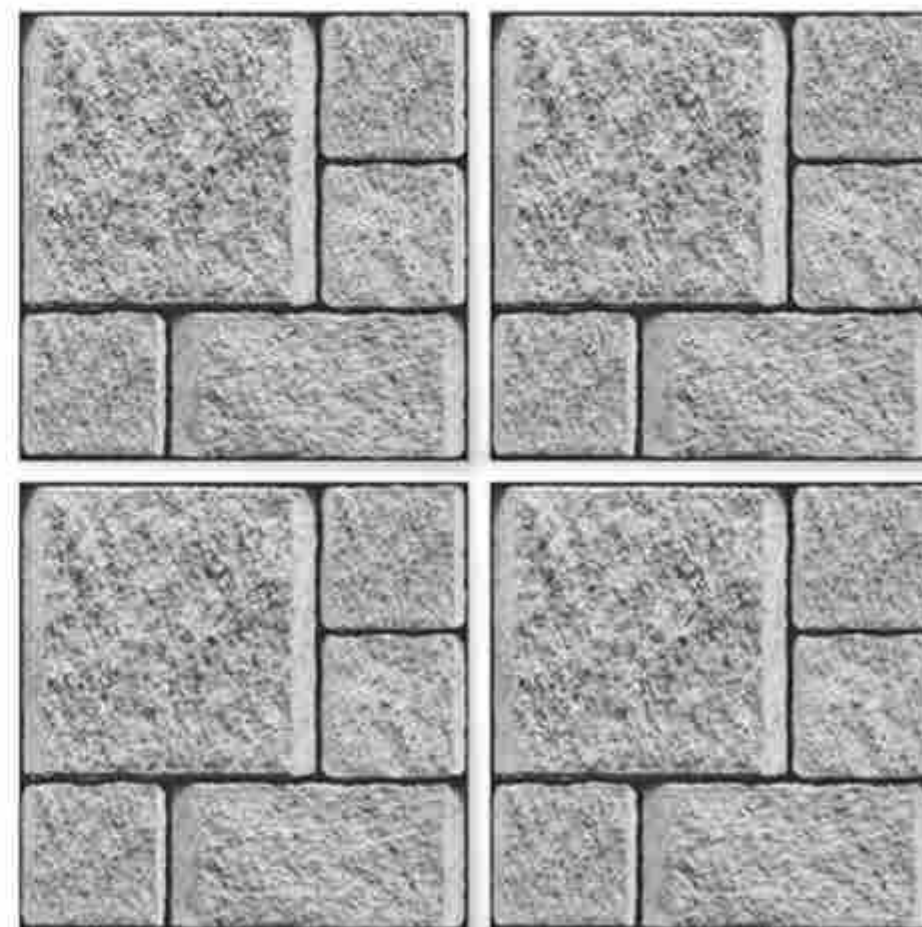

Applications







2304

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








2308


Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>9 mm</u>	<u>1</u>

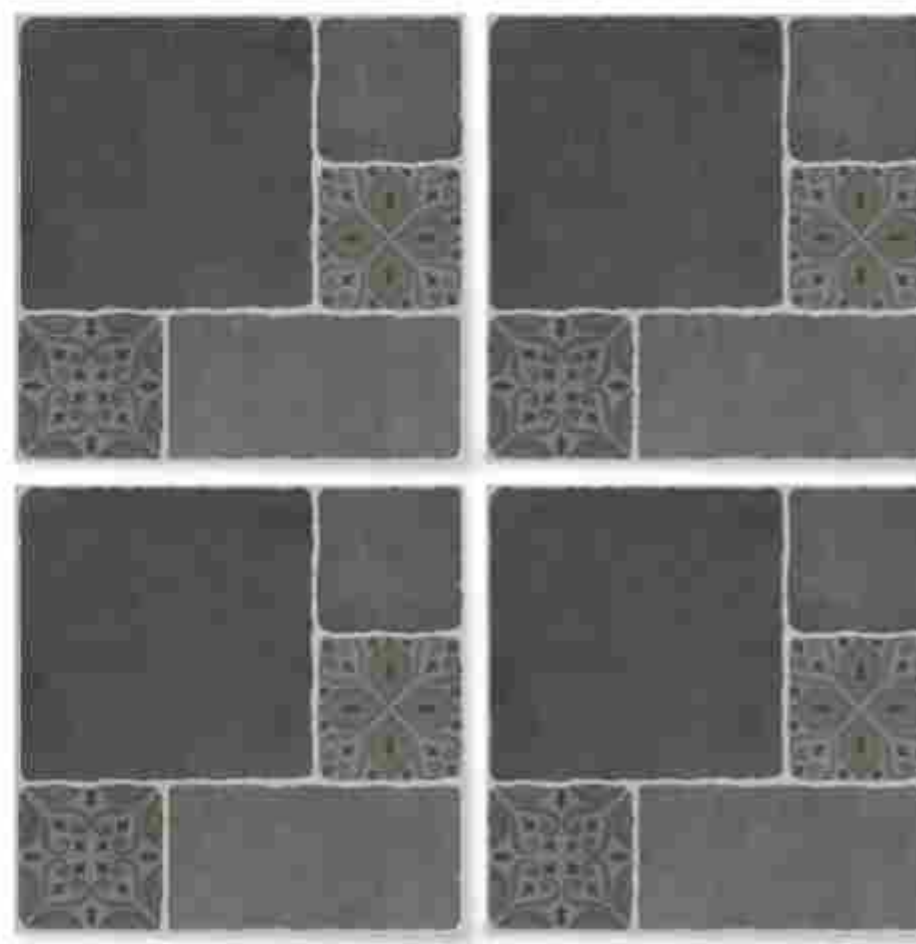

Applications






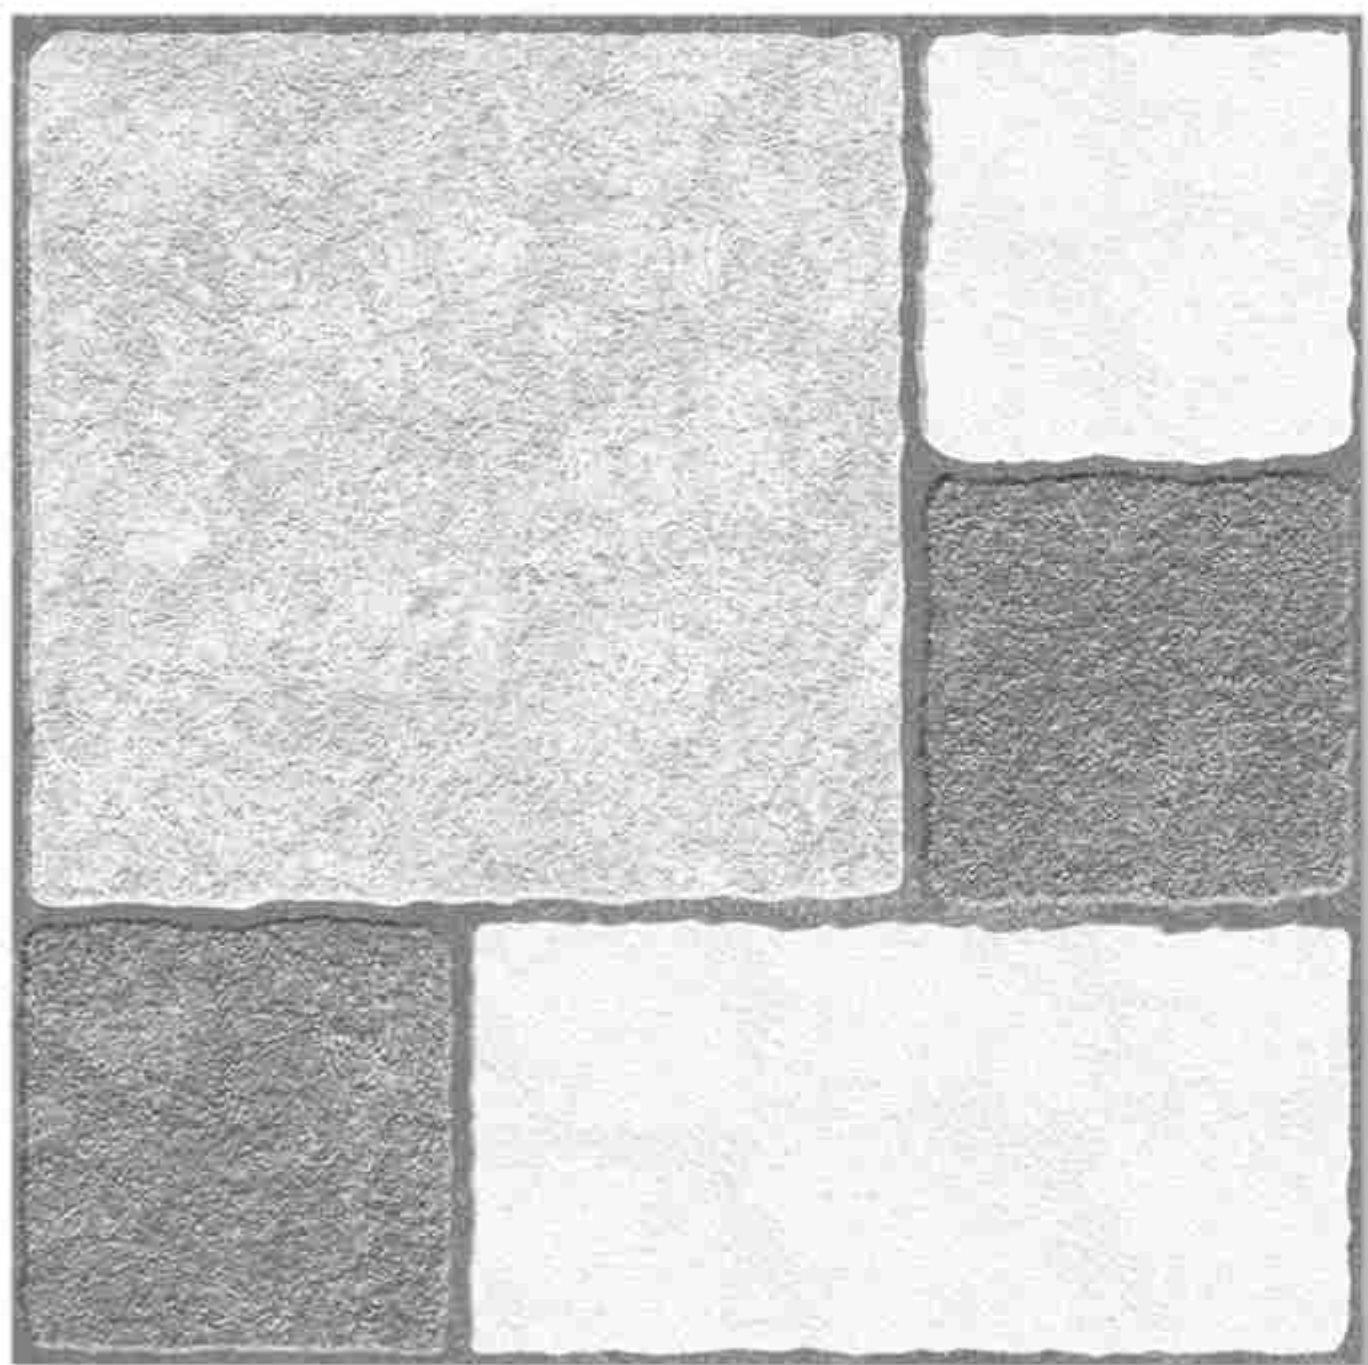

2310

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

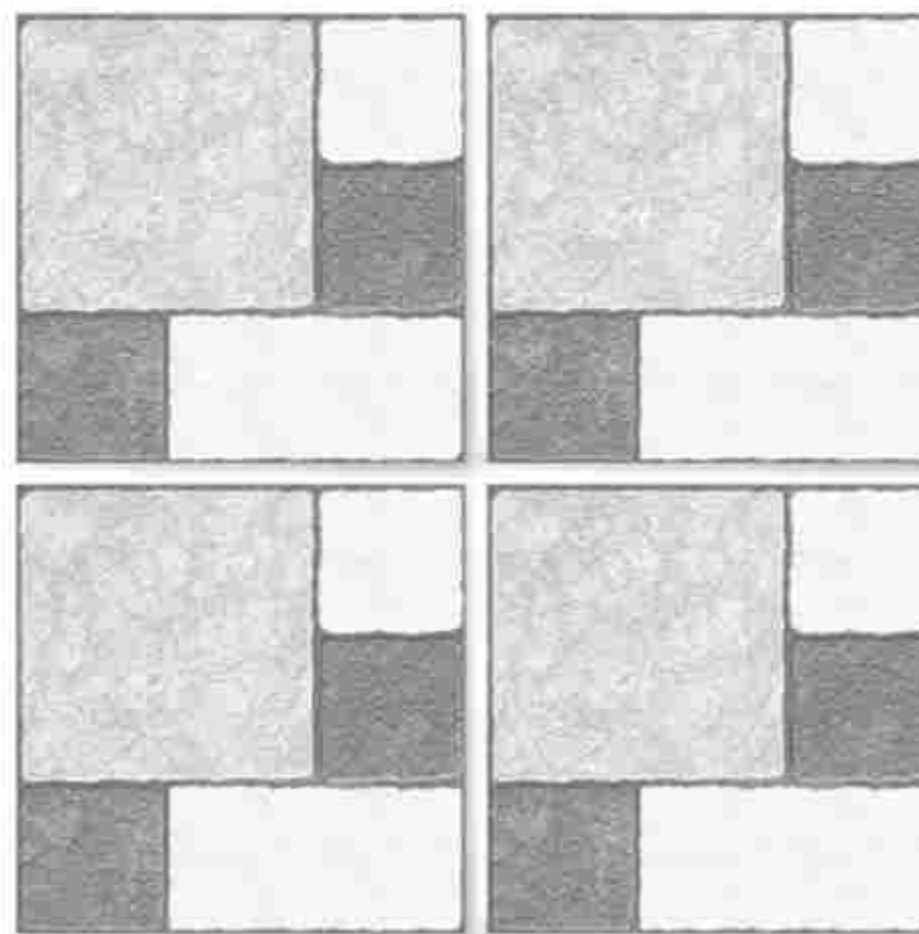

Applications








2311

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

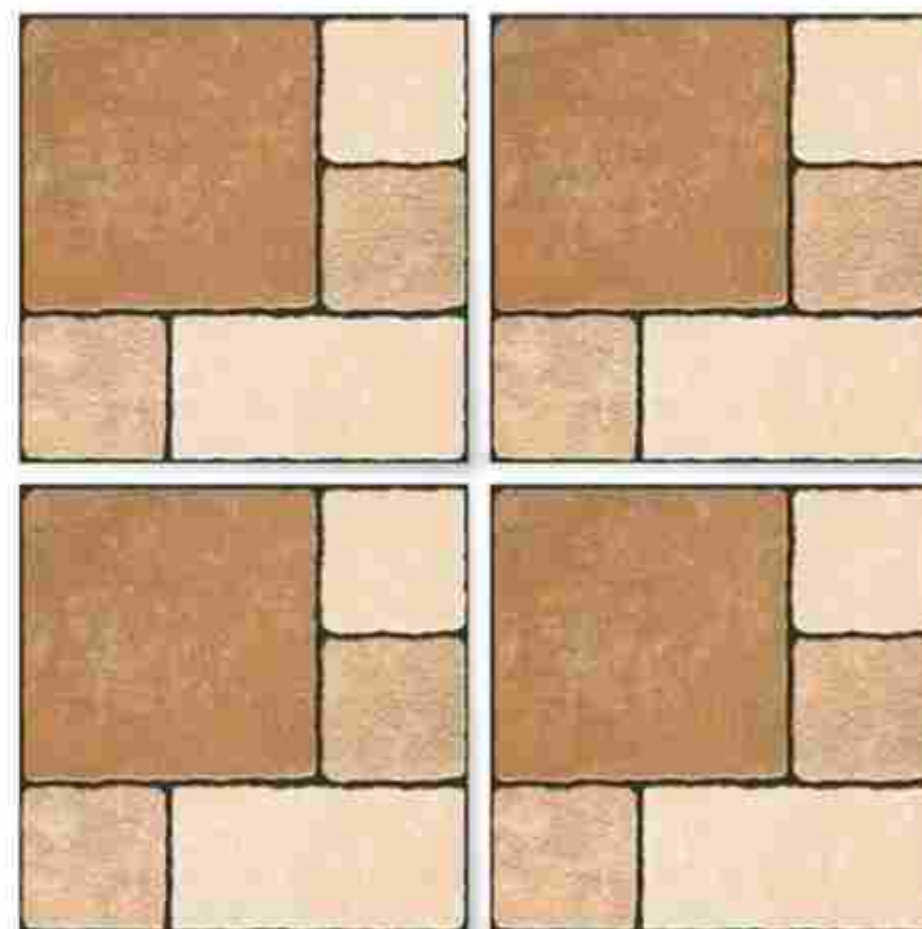

Applications








2312

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

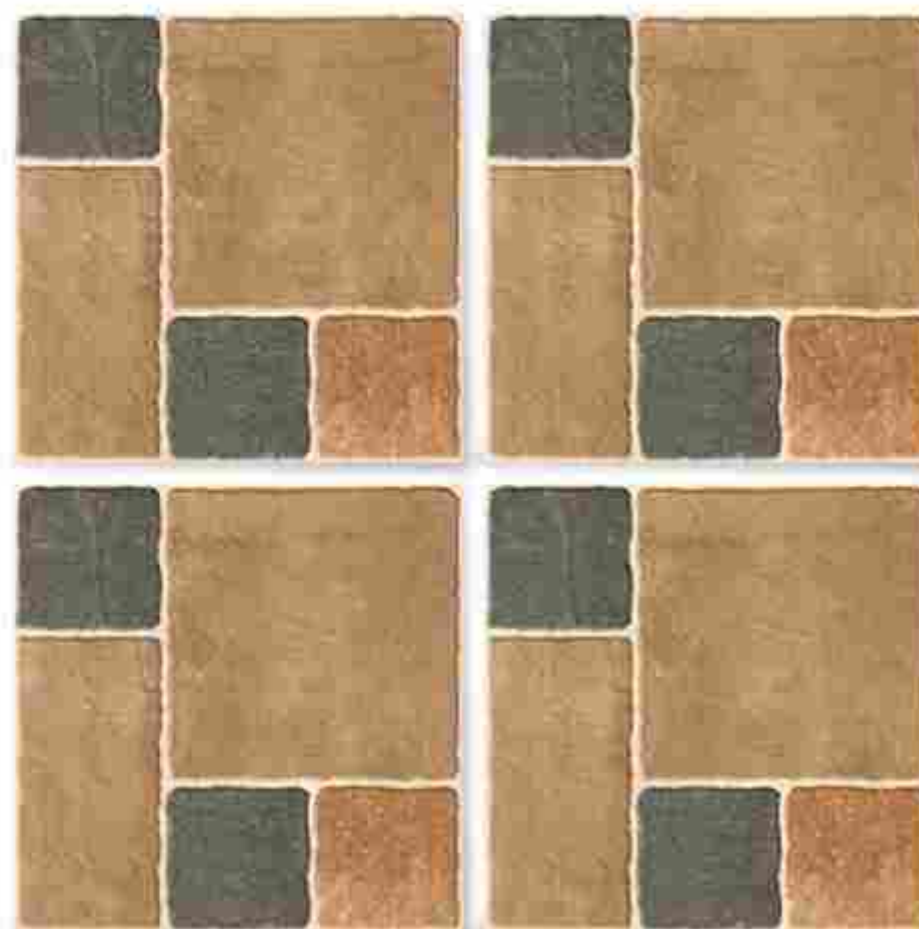

Applications








2314 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

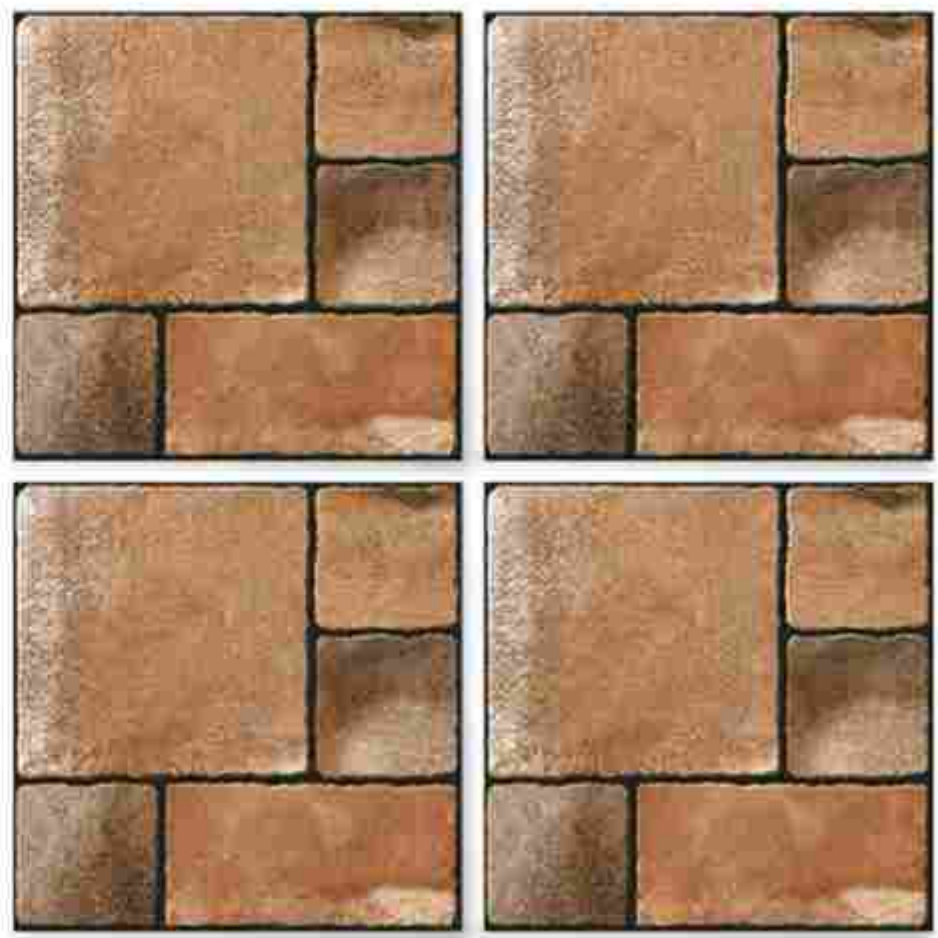

Applications

-  Residences
-  Commercial
-  Hotels & Resorts
-  Public Areas





2315 NEW


Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1



Applications






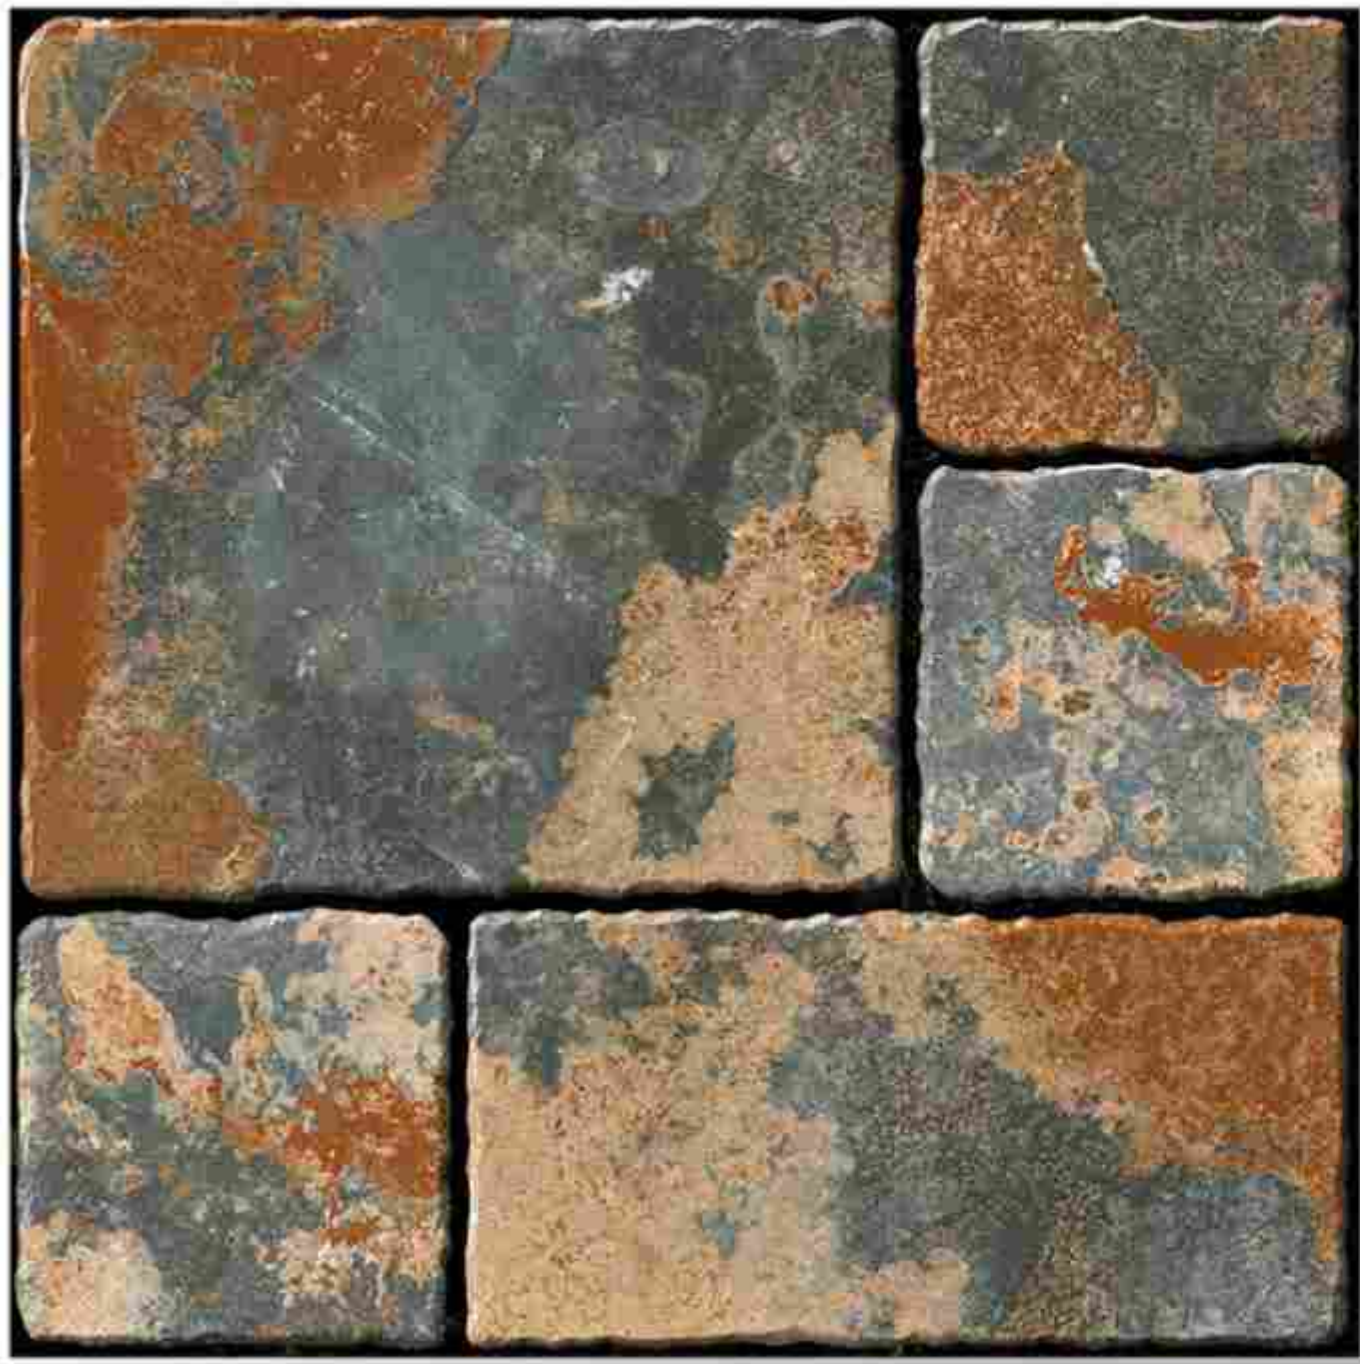


2316 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1

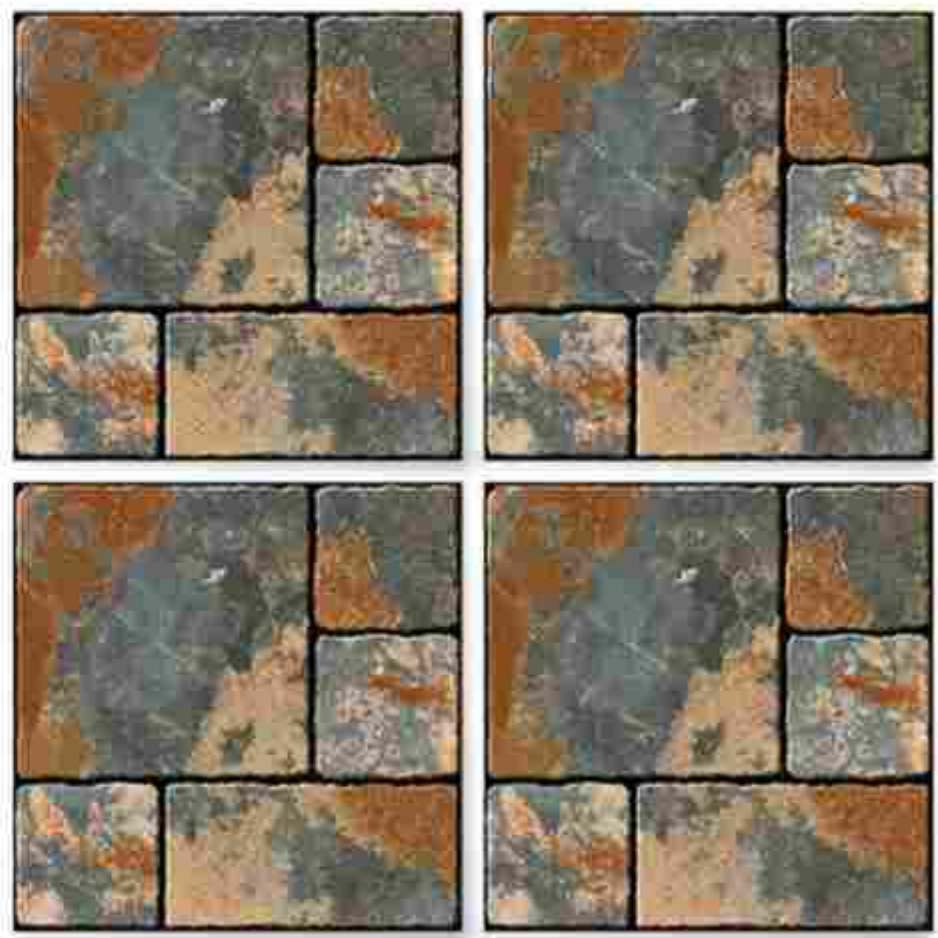

Applications


-  Residences
-  Commercial
-  Roads & Infrastructure
-  Public Area

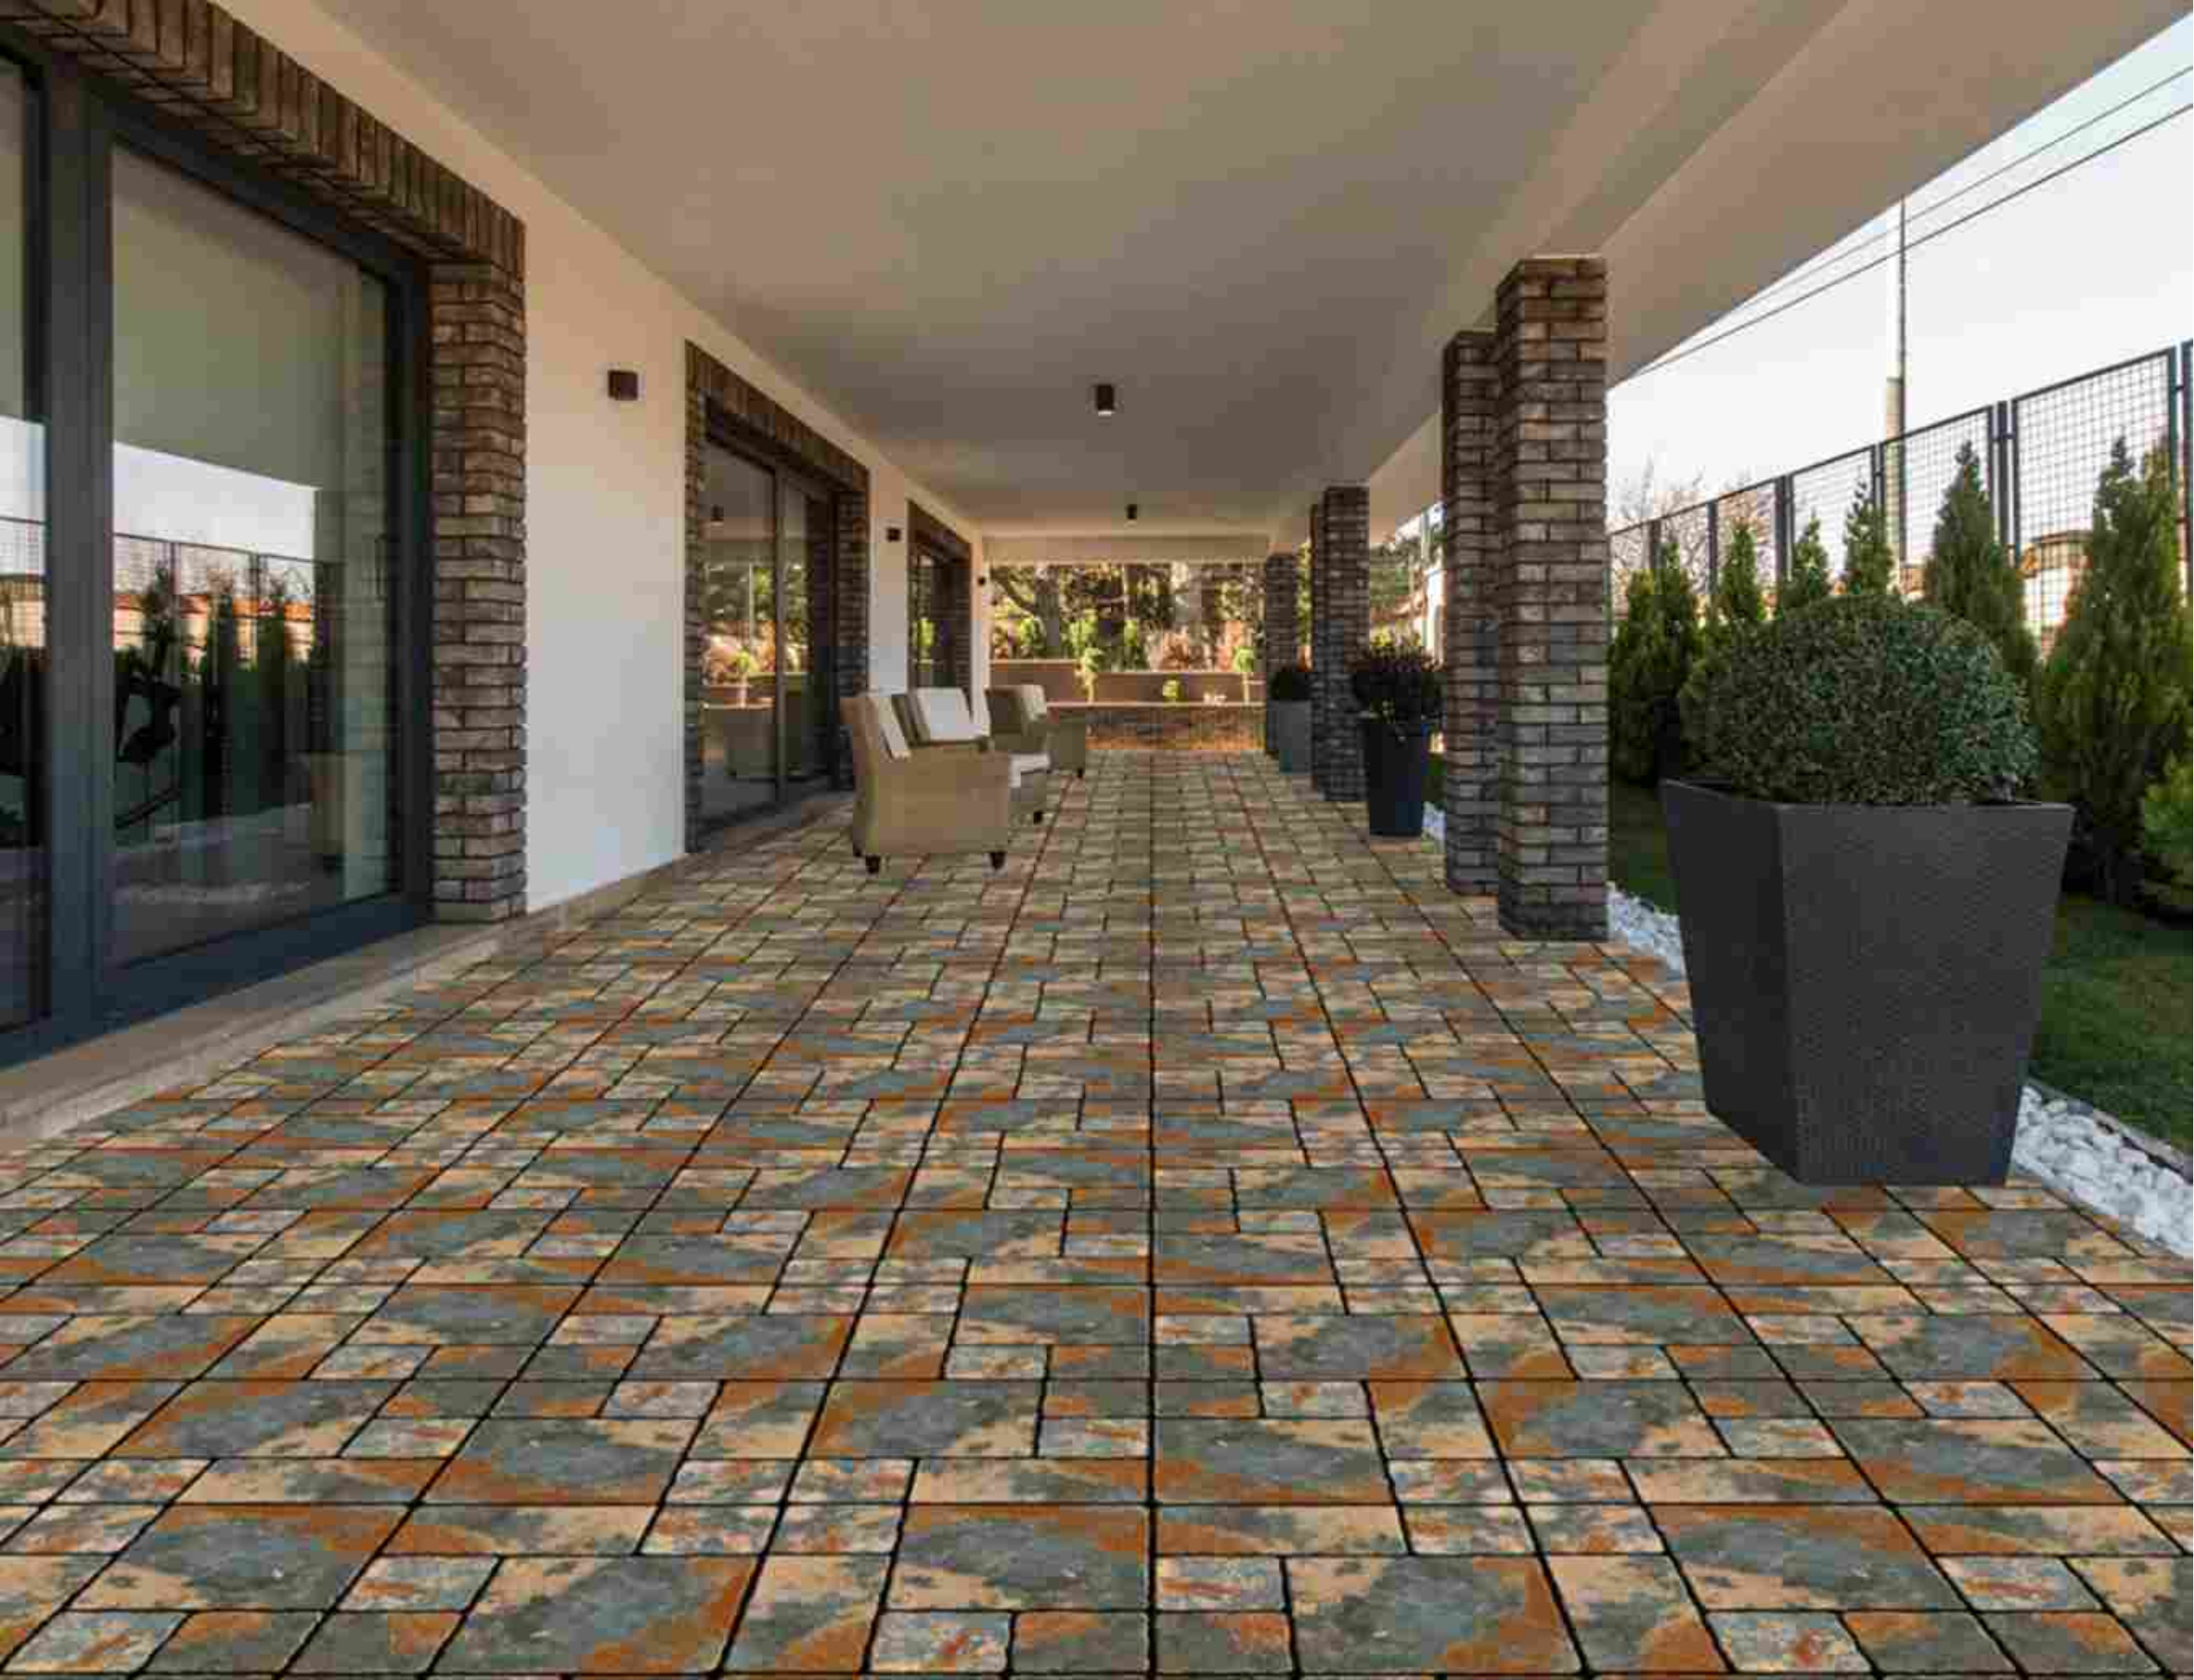



2317 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

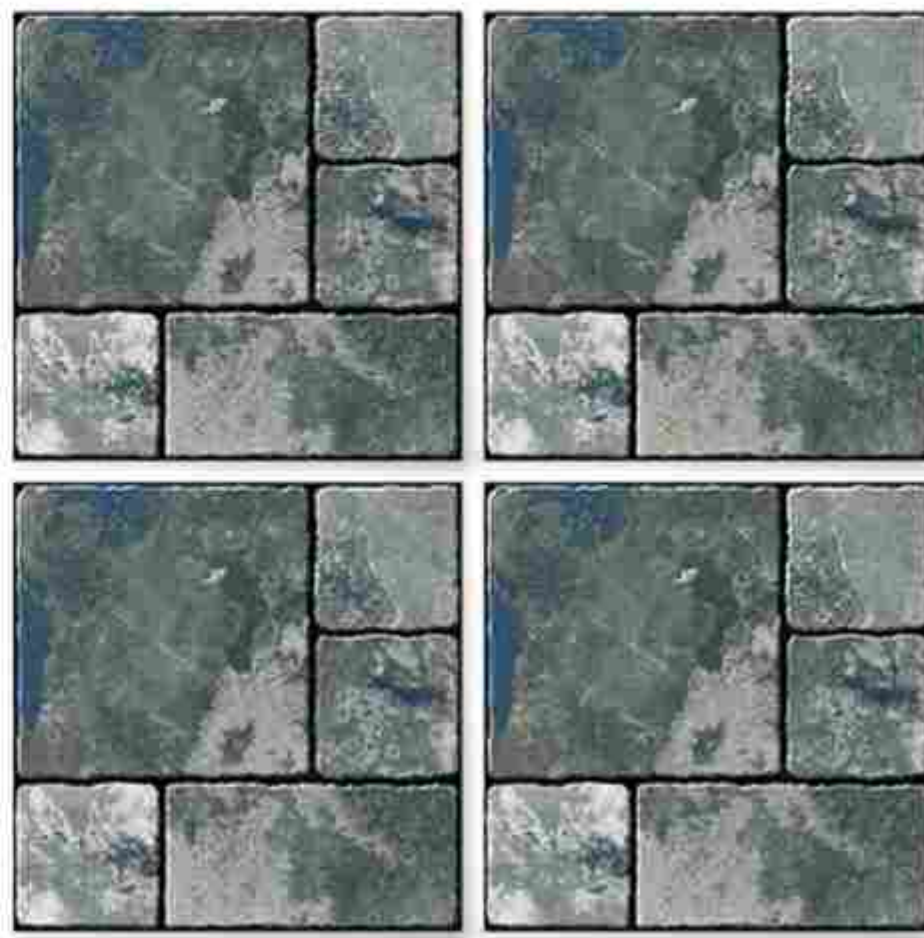

Applications







2318 NEW

Size	Finish	Thickness	Random
400x400 mm	Matt	12 mm	1



Applications








2319 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

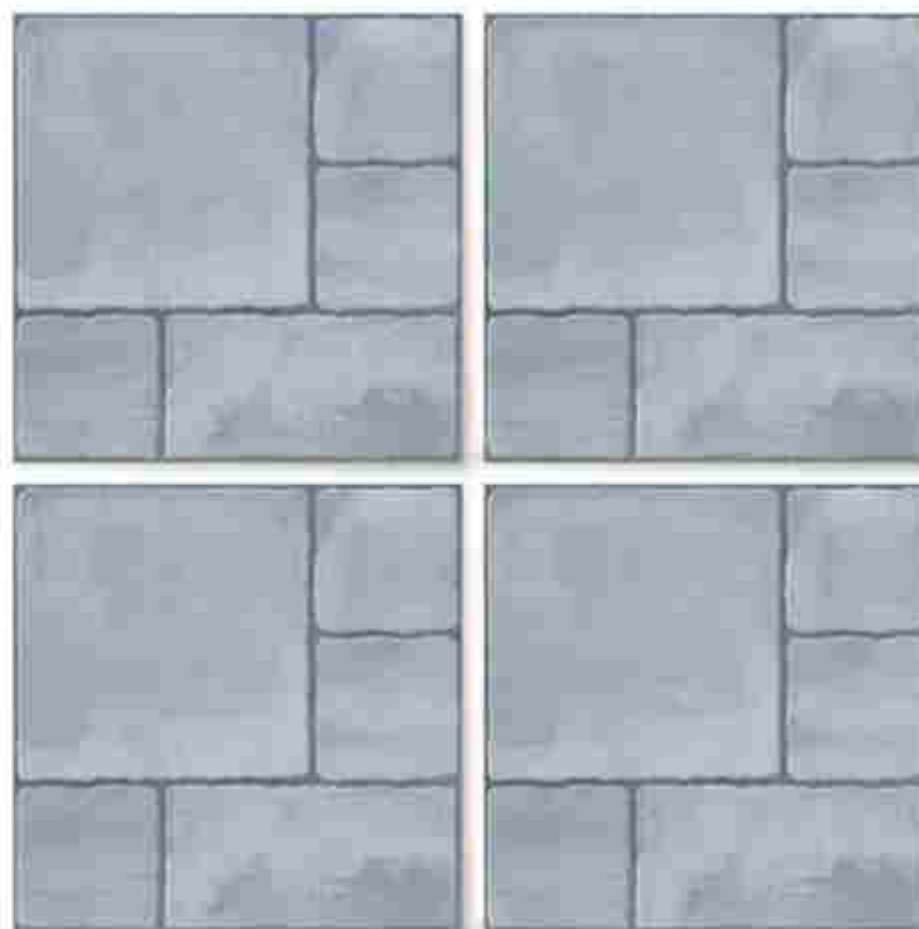

Applications









2320 NEW

Size	Finish	Thickness	Random
<u>400x400 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

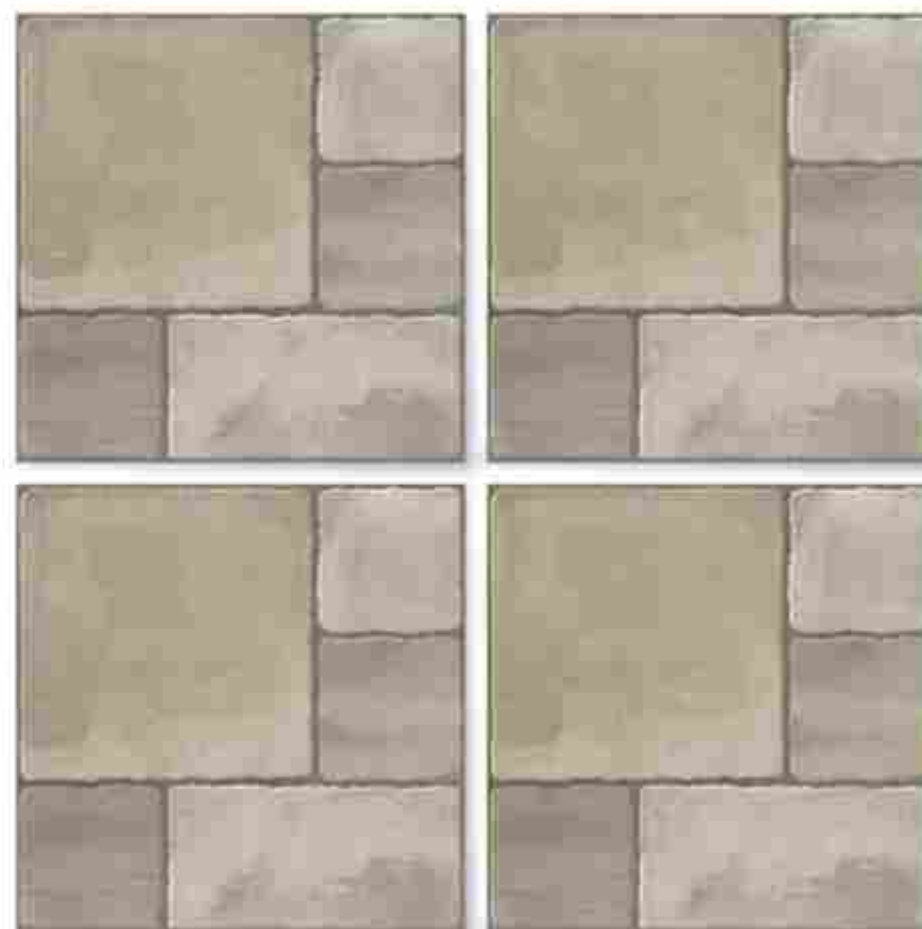

Applications



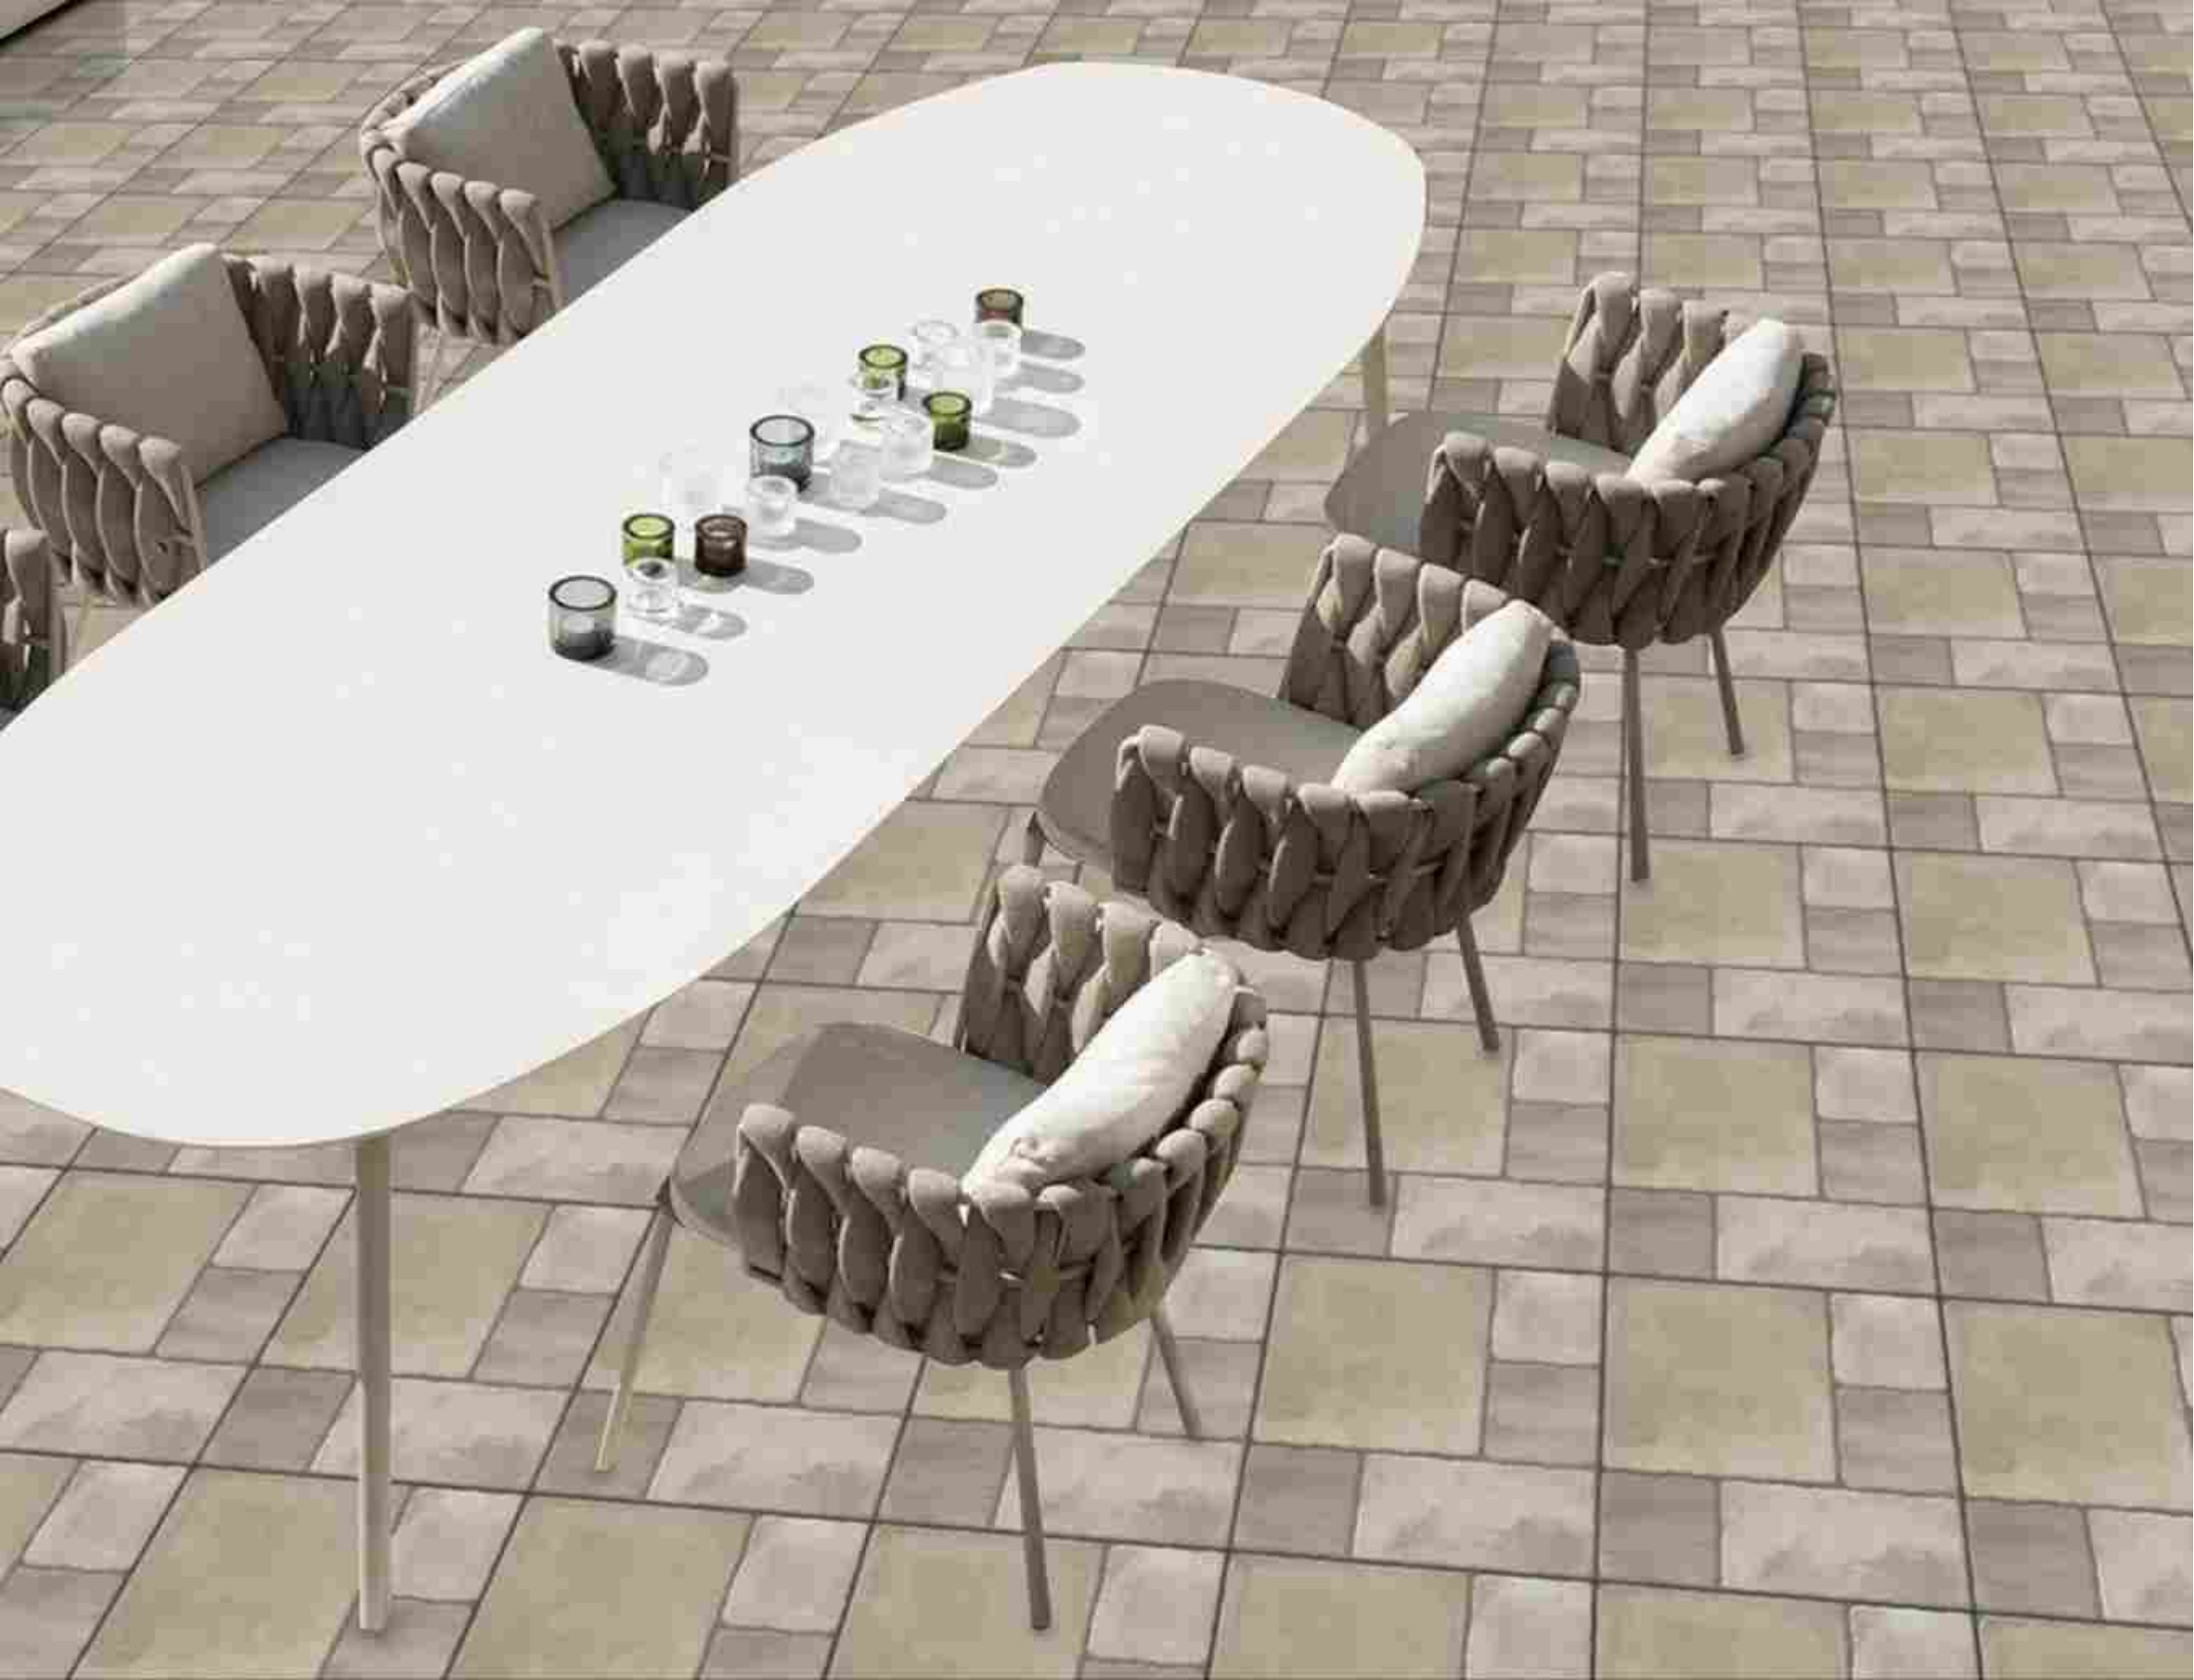

TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group Bla	SAKET TILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 400X400MM	12 MM	5 PCS	0.8	18 Kgs
1.	DIGITAL 400X400MM	10 MM	5 PCS	0.8	16 Kgs

Thank you



www.pooraboverseas.com

export@pooraboverseas.com