
**PARKING
VITRIFIED
TILES**

500x

500MM


50x 50cm

| PARKING VITRIFIED TILES

.....

All about an adventurous tile which has immense toughness with great look that complements every area.



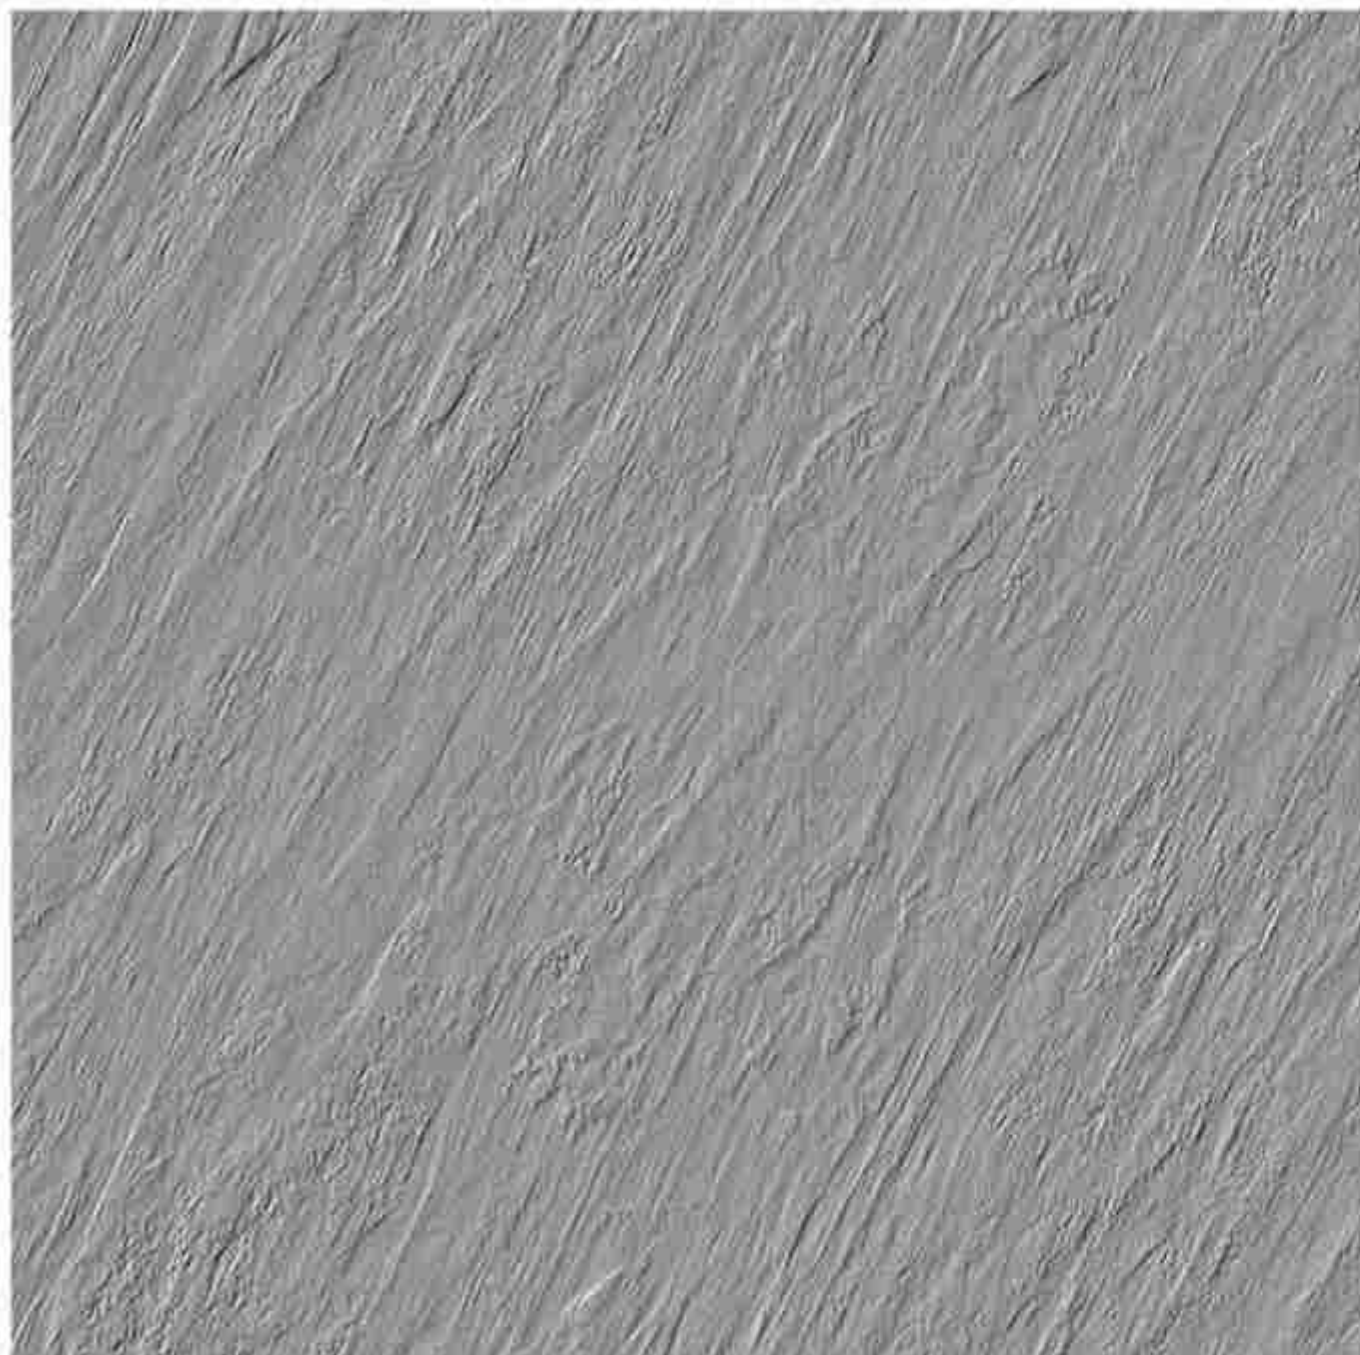

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications





7001

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7006

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7011

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications



Residential



Commercial



Trade &
Recreational




Public
Areas





7013

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

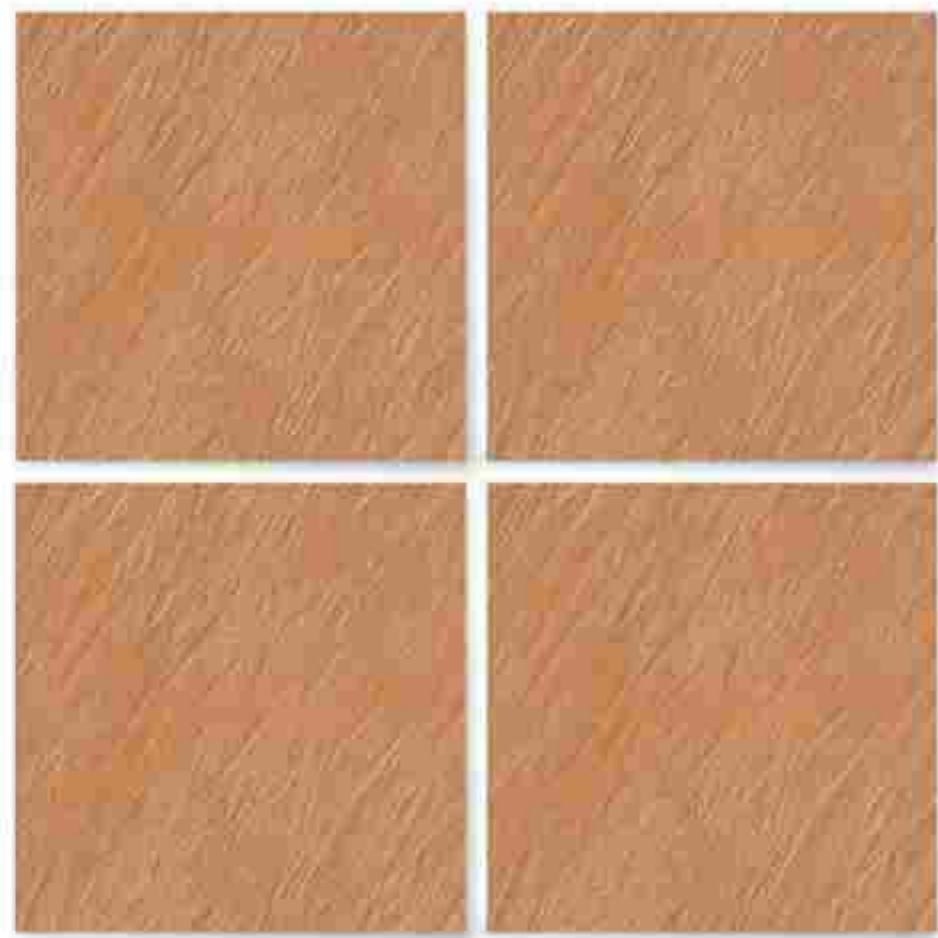

Applications








7014

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

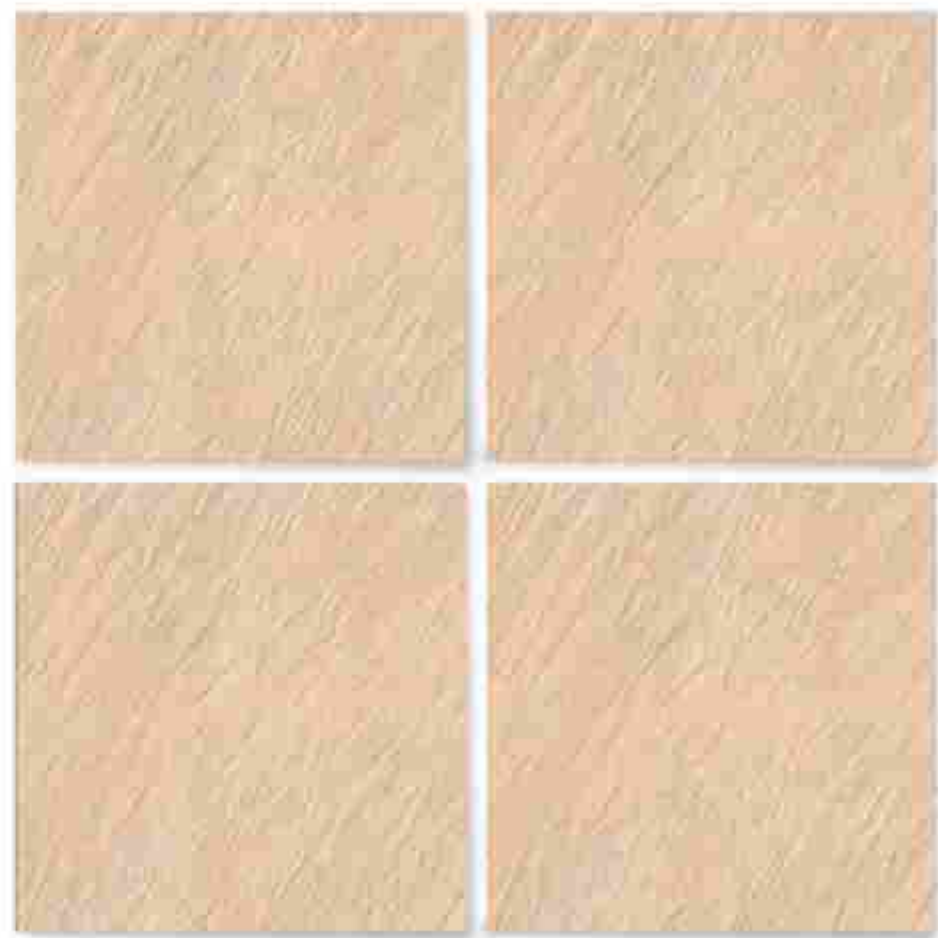

Applications








7016

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

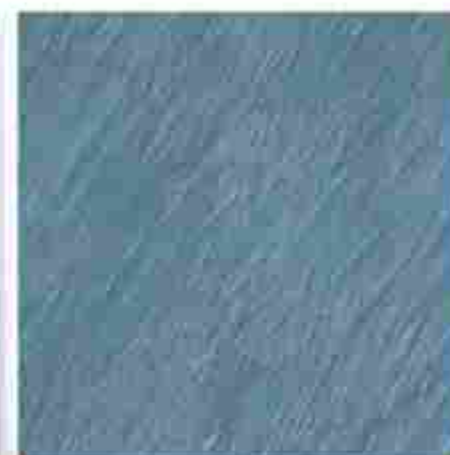

Applications



WHAT
WOULD
BLAIR
WALDOR
DO?





7017

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7018


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







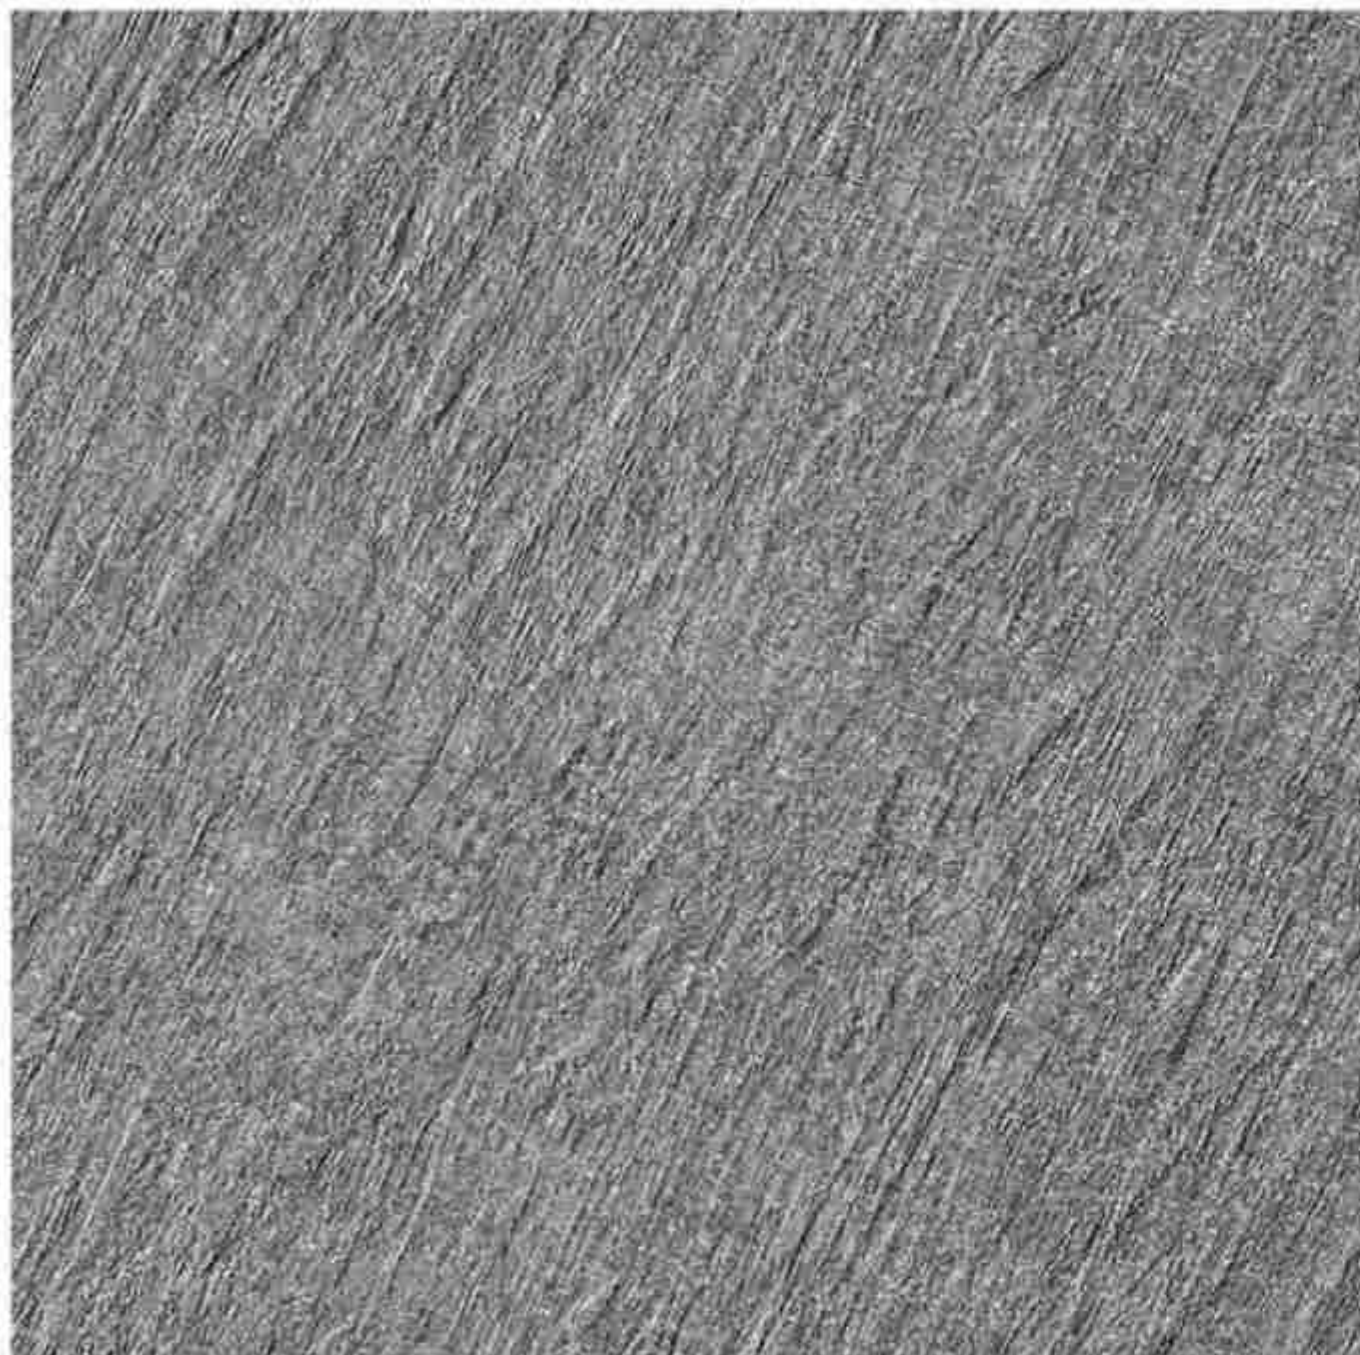

7021


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

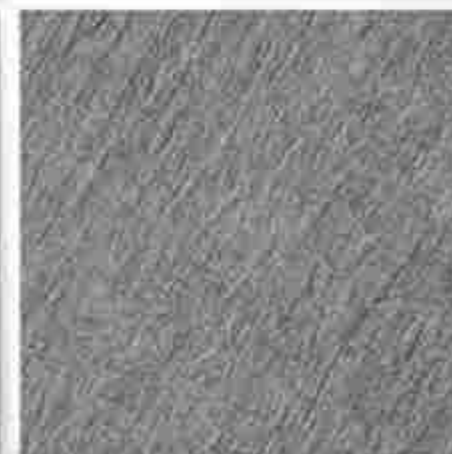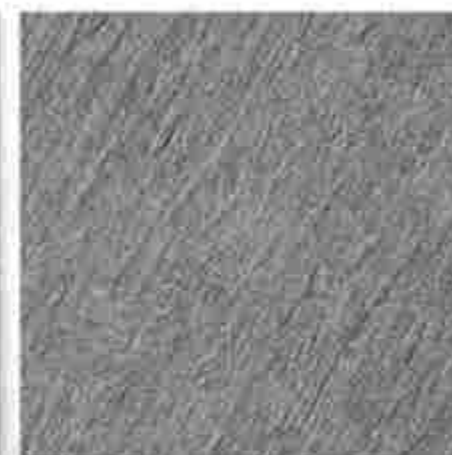

Applications





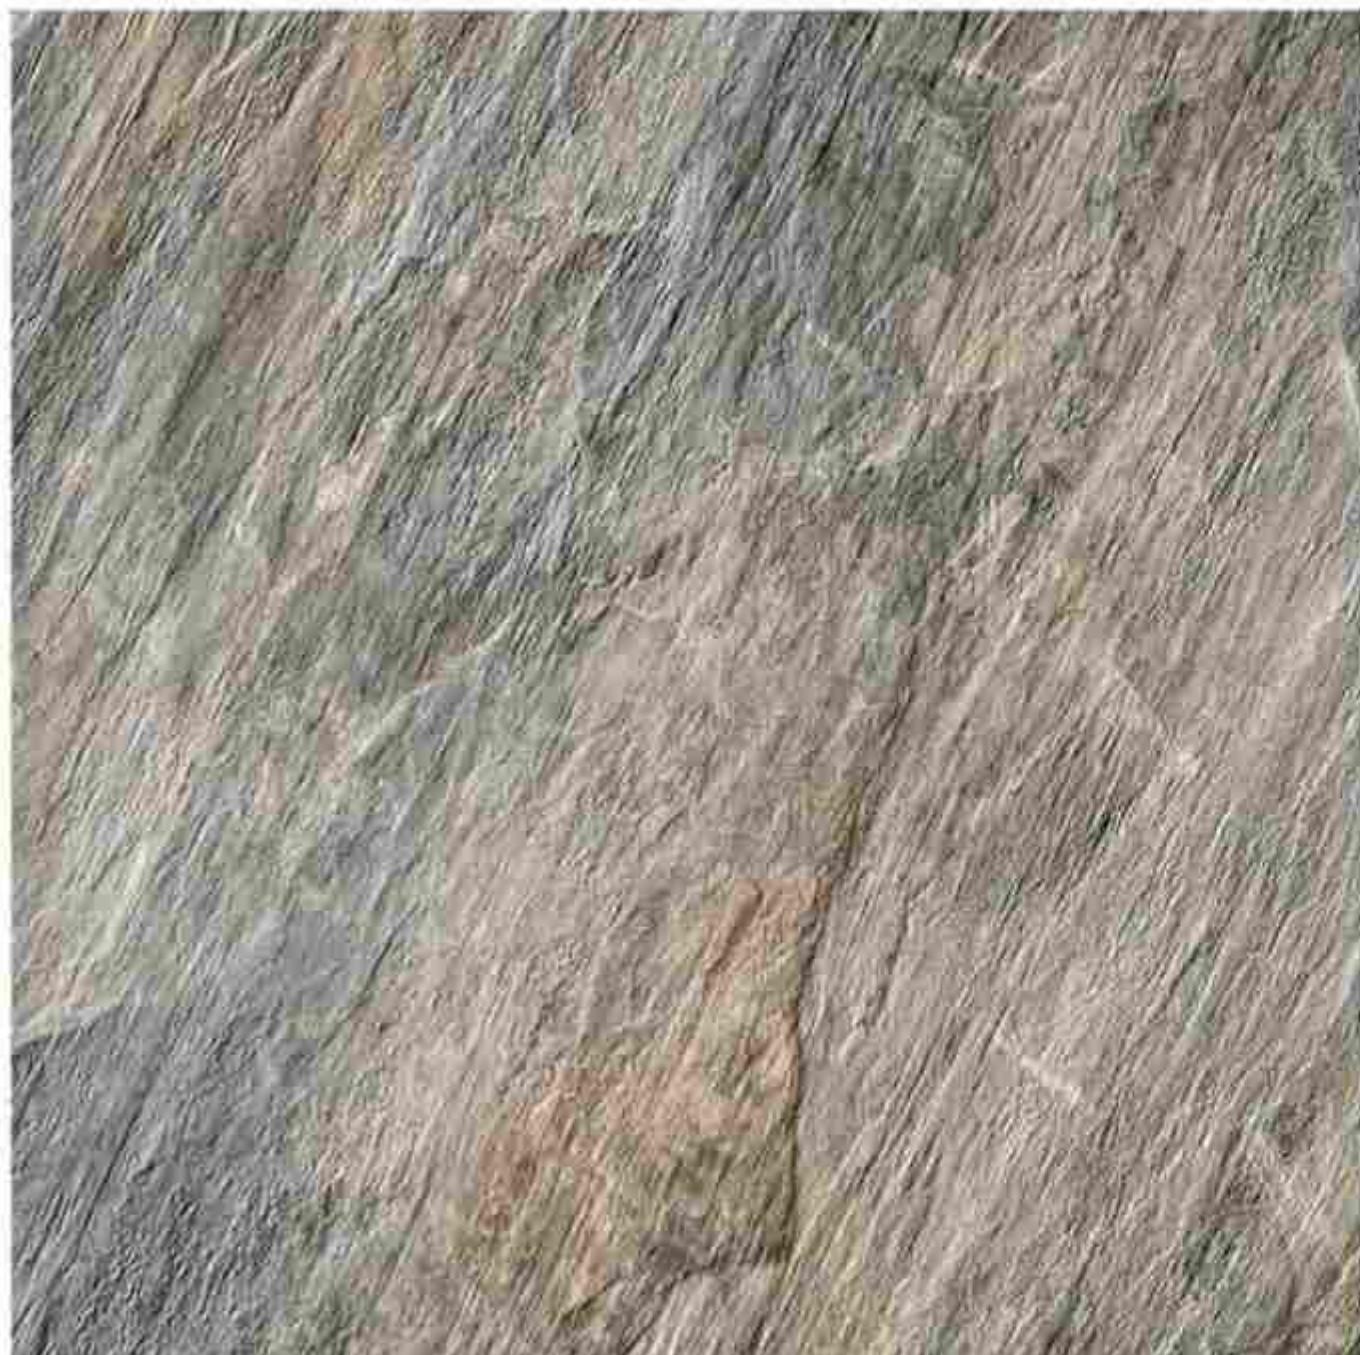

7022

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7023

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7024

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







7025

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications





TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group BIa	SAKETILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 500X500 MM	12 MM	3 PCS	0.76	16.5 Kgs

Thank you

