
**PARKING
VITRIFIED
TILES**

500x

500MM


50x 50cm

| PARKING VITRIFIED TILES


.....

All about an adventurous tile which has immense toughness with great look that complements every area.



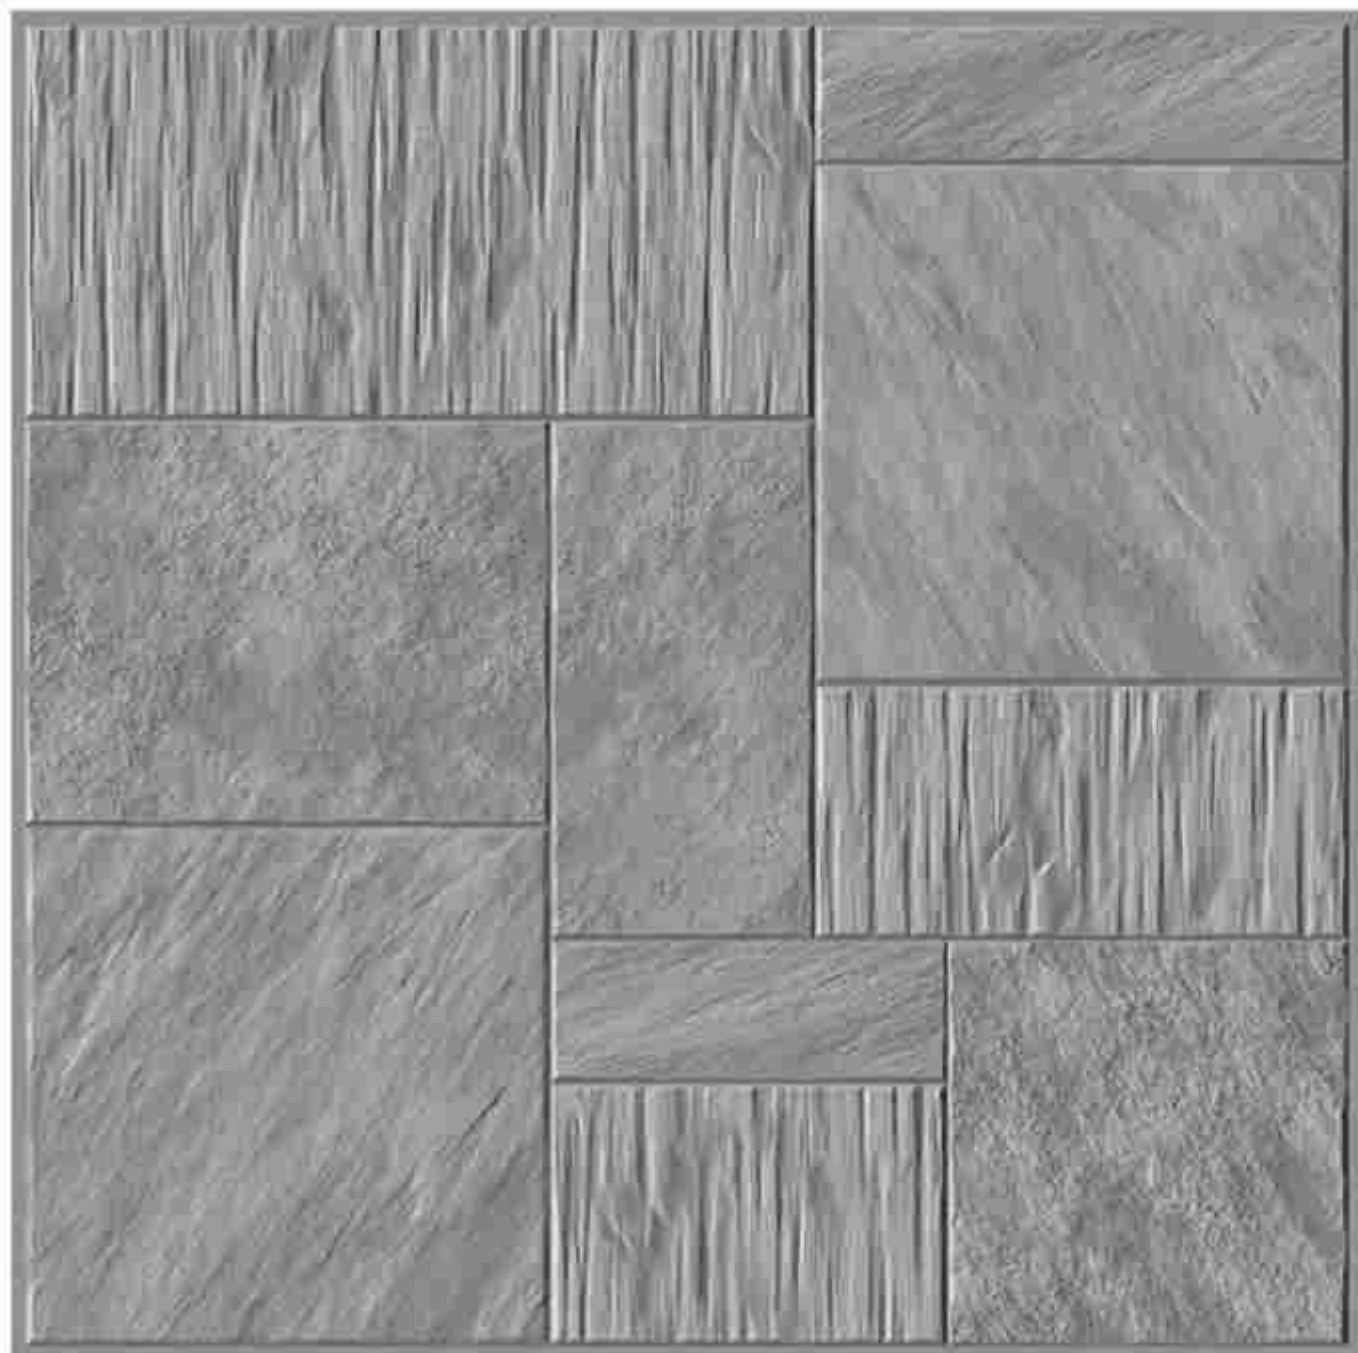

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

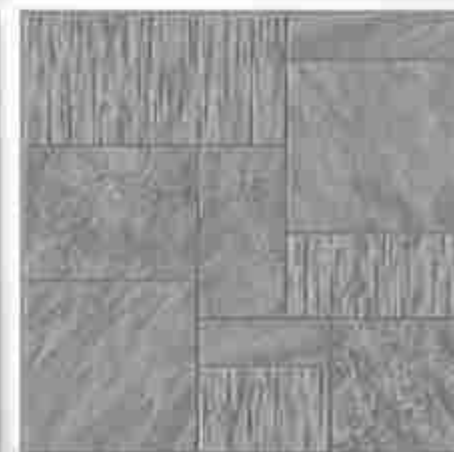

Applications





13101

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







13102

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








13105


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications




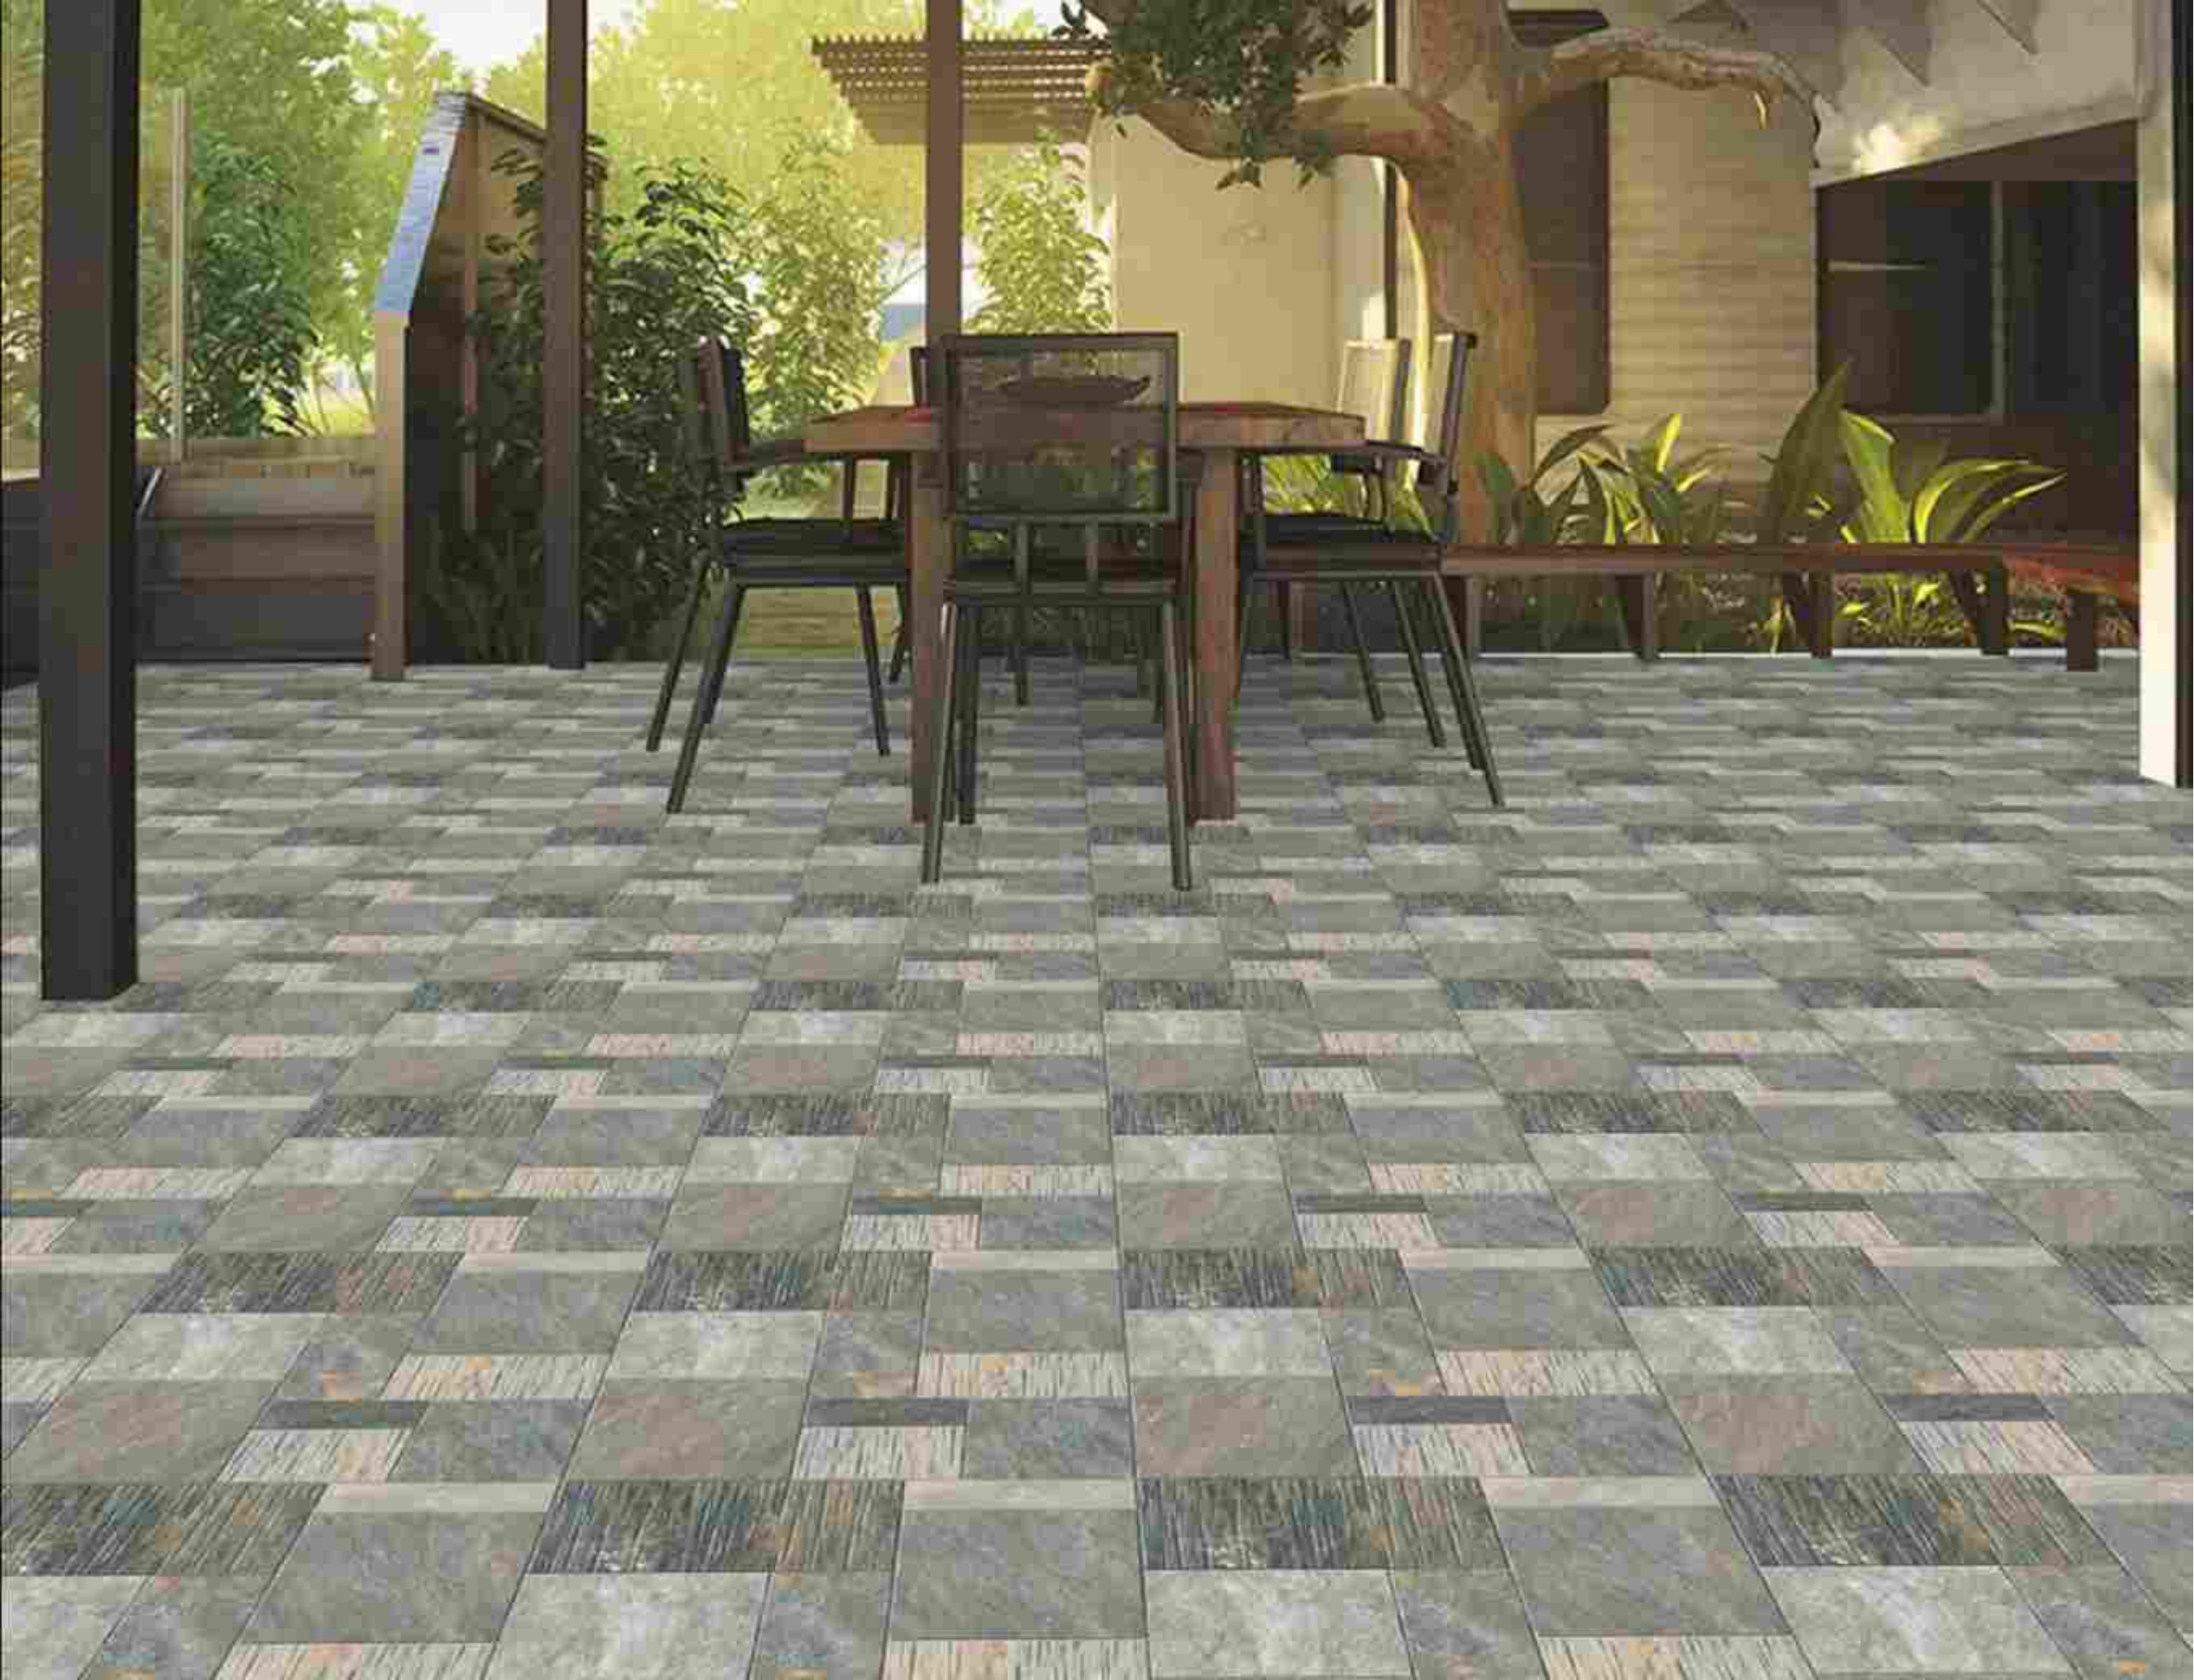

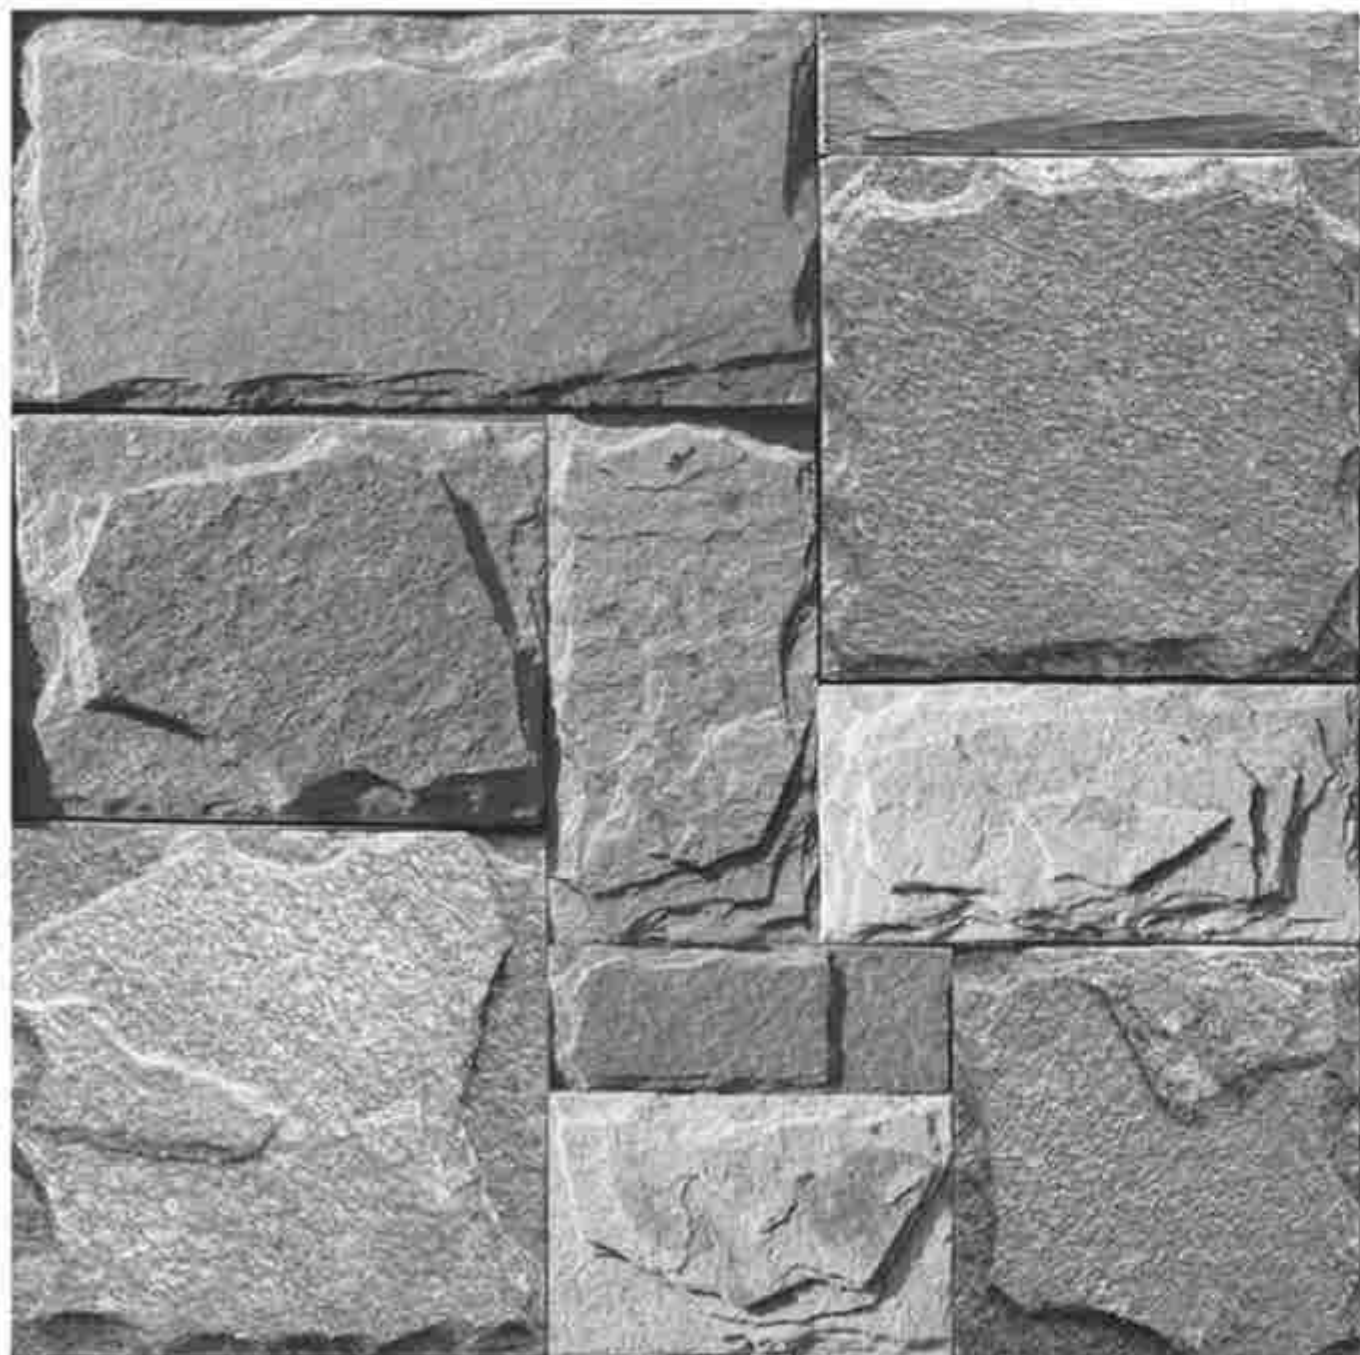

13107

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

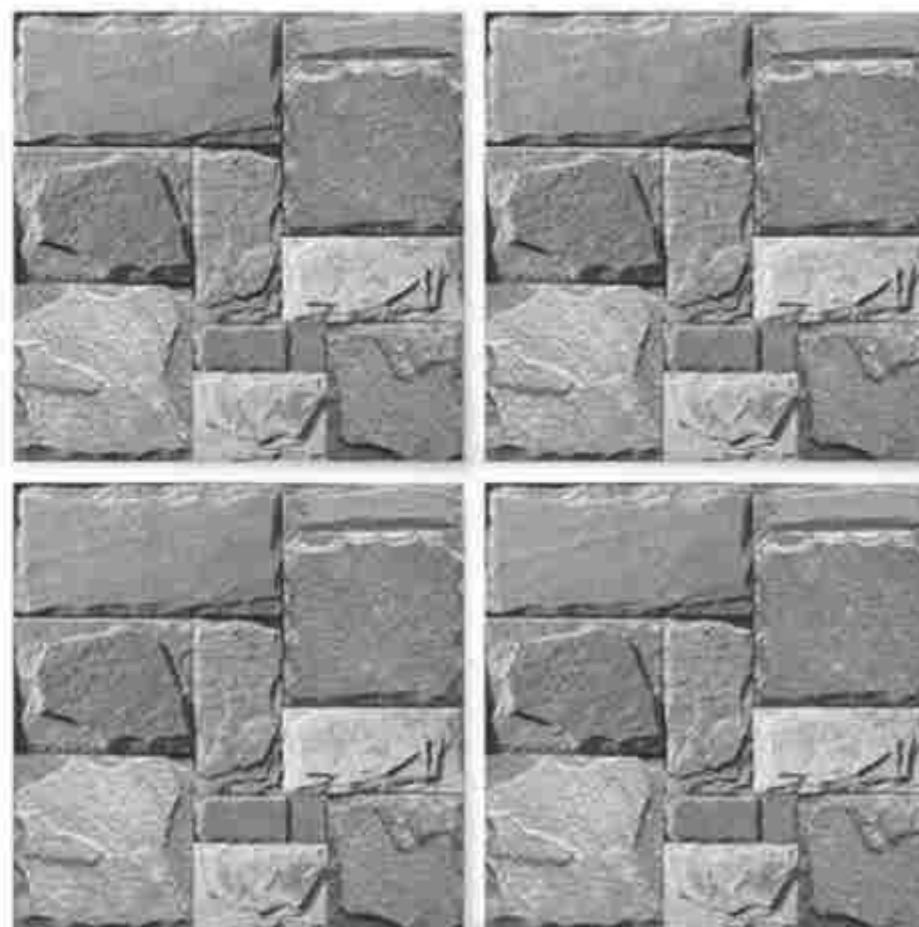

Applications







13108

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








13109

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

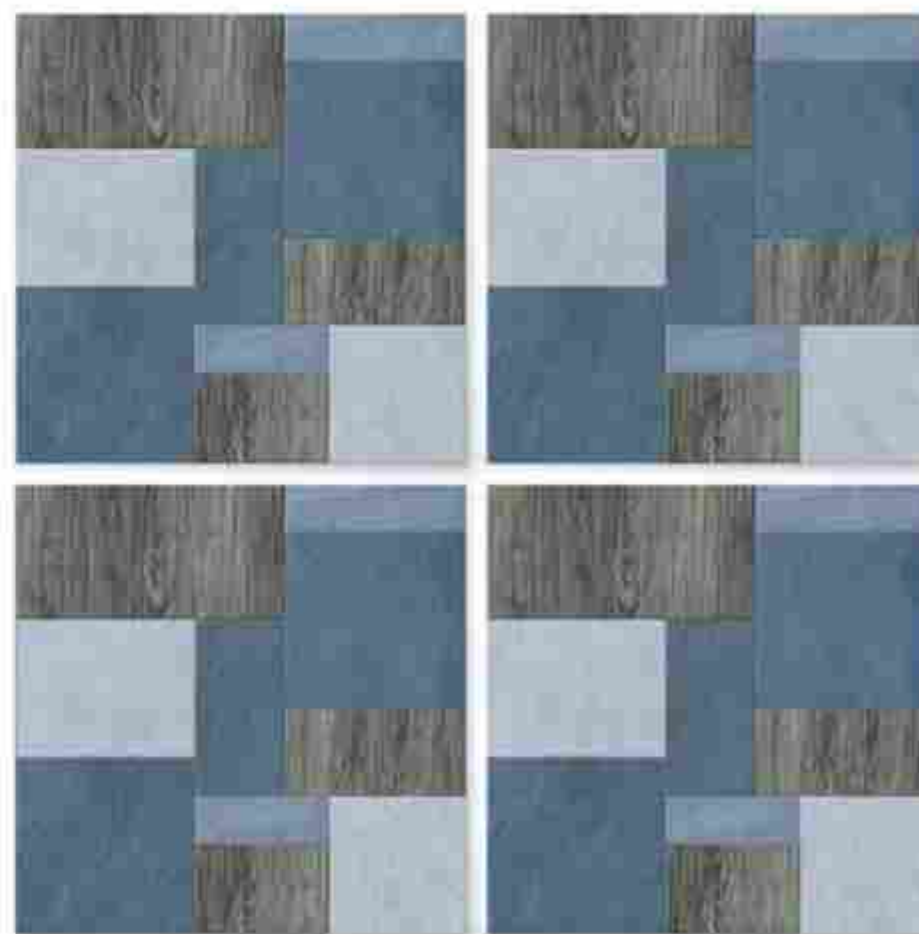

Applications







13110

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








13111

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

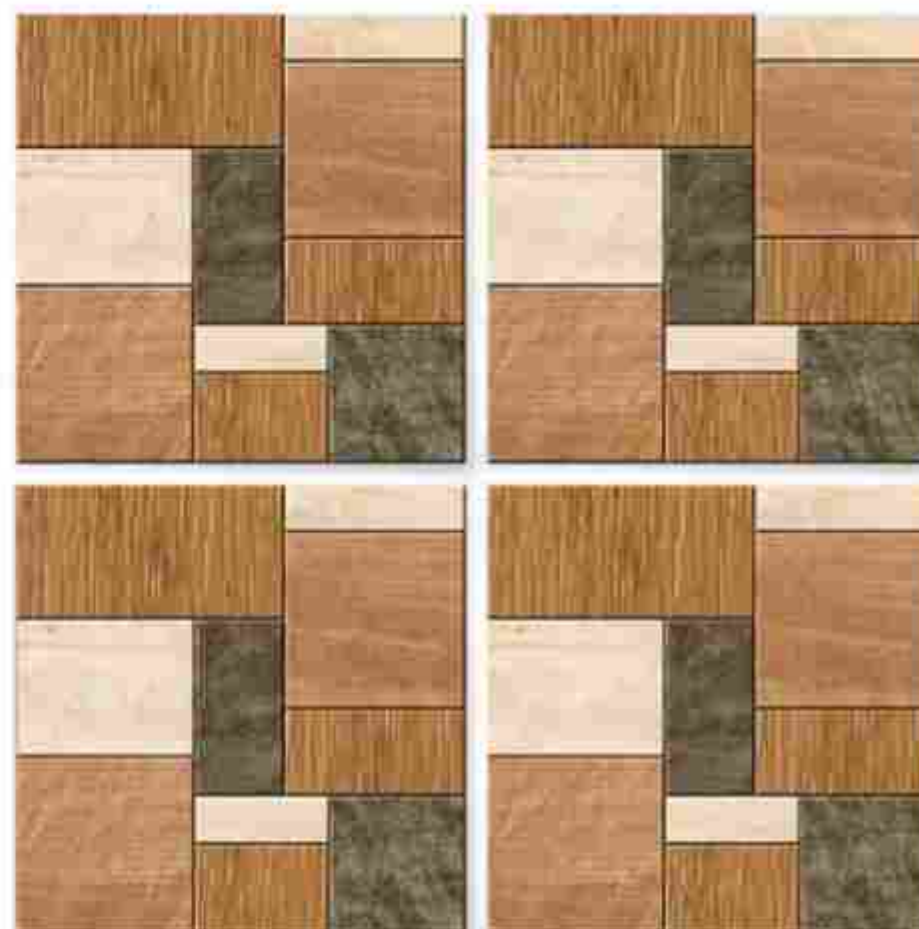

Applications







13112

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







13113

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







13114

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







13115

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







13116

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications








13117

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>9 mm</u>	<u>1</u>

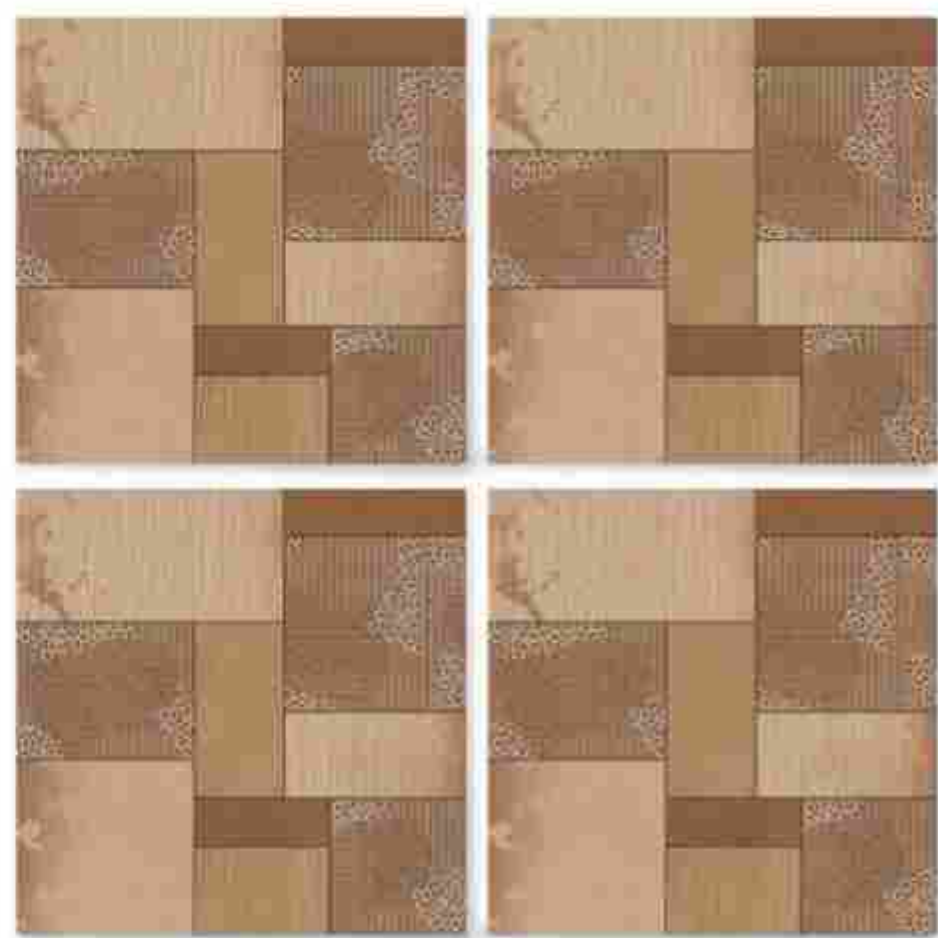

Applications








13118

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>9 mm</u>	<u>1</u>

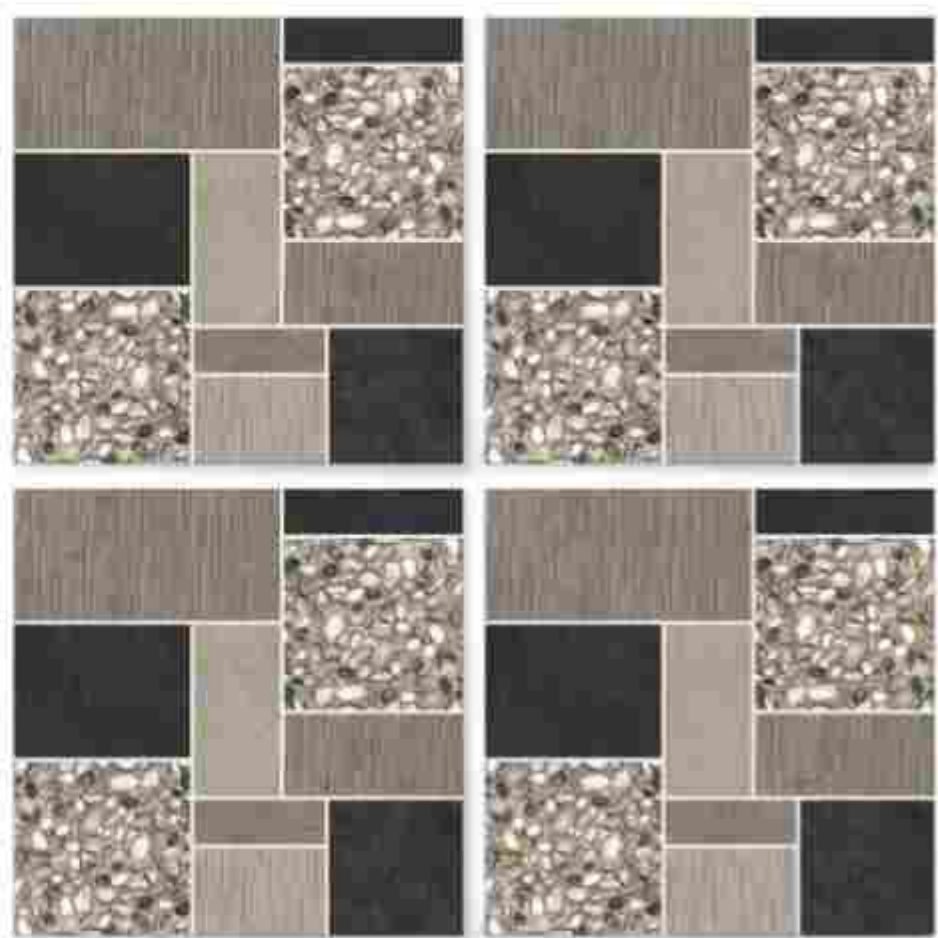

Applications





TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group BIa	SAKETILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 500X500 MM	12 MM	3 PCS	0.76	16.5 Kgs

Thank you

