
**PARKING
VITRIFIED
TILES**

500x

500MM


50x 50cm

| PARKING VITRIFIED TILES


.....

All about an adventurous tile which has immense toughness with great look that complements every area.



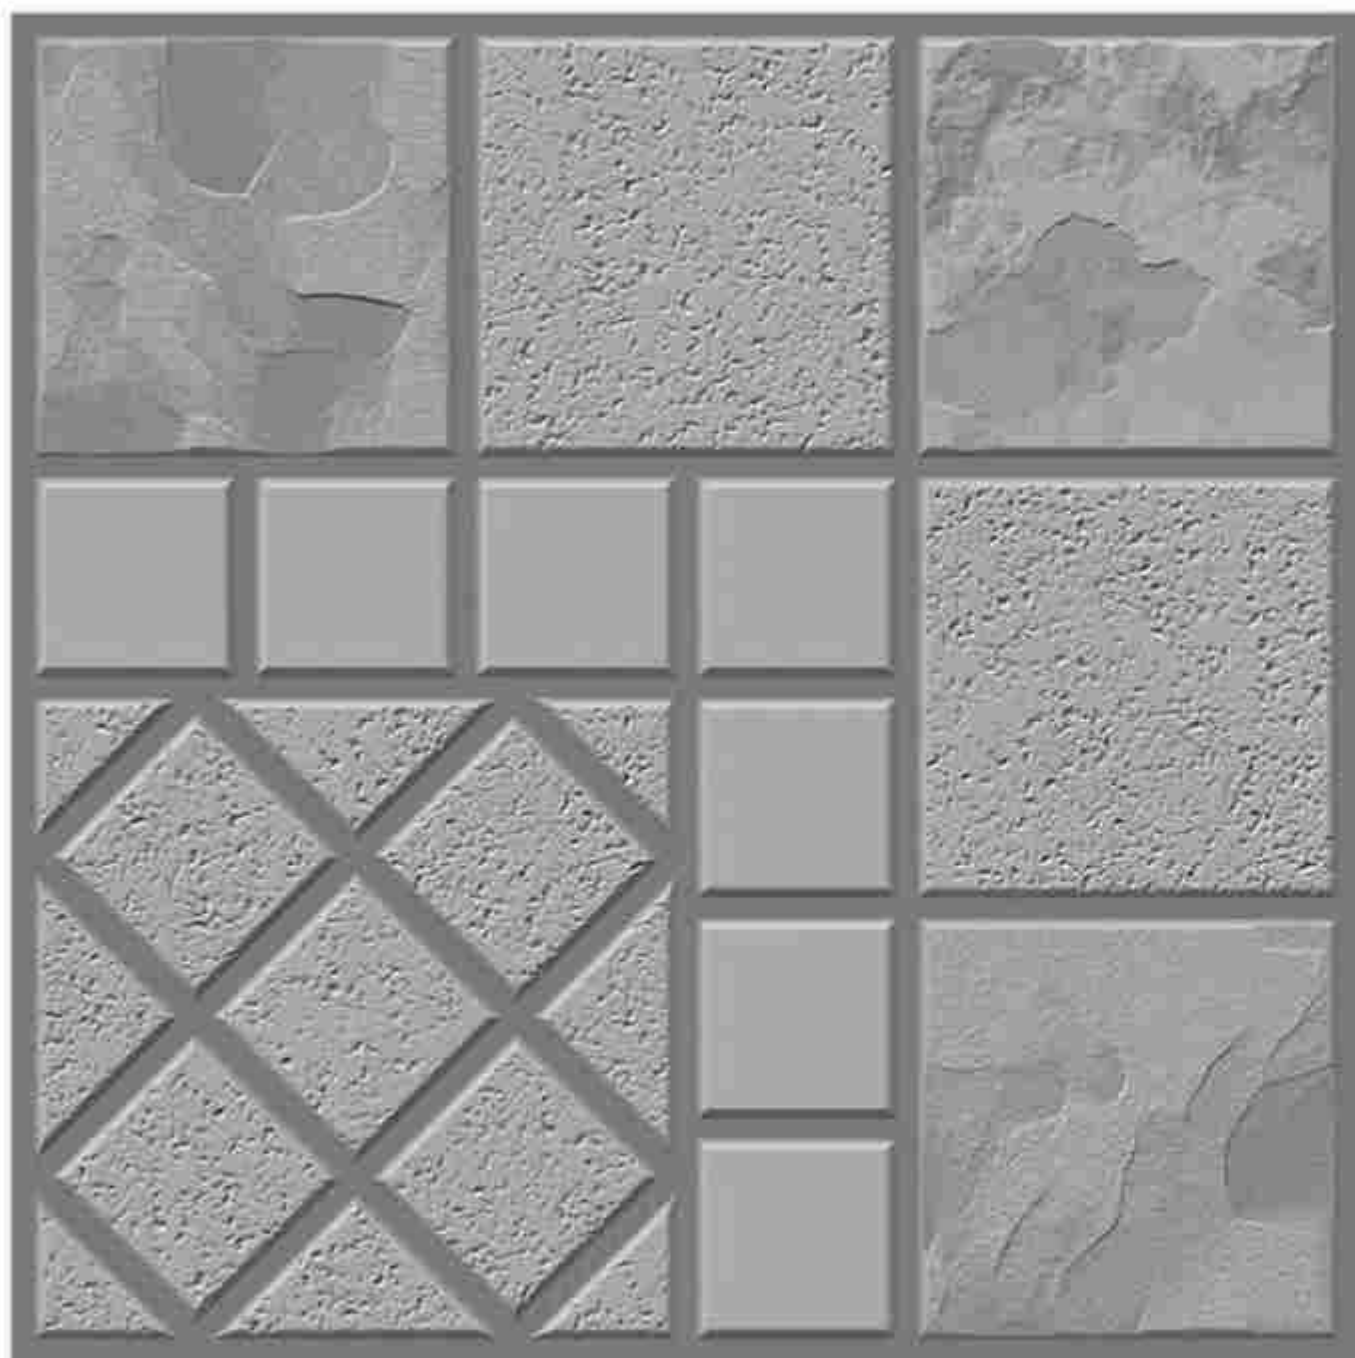

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

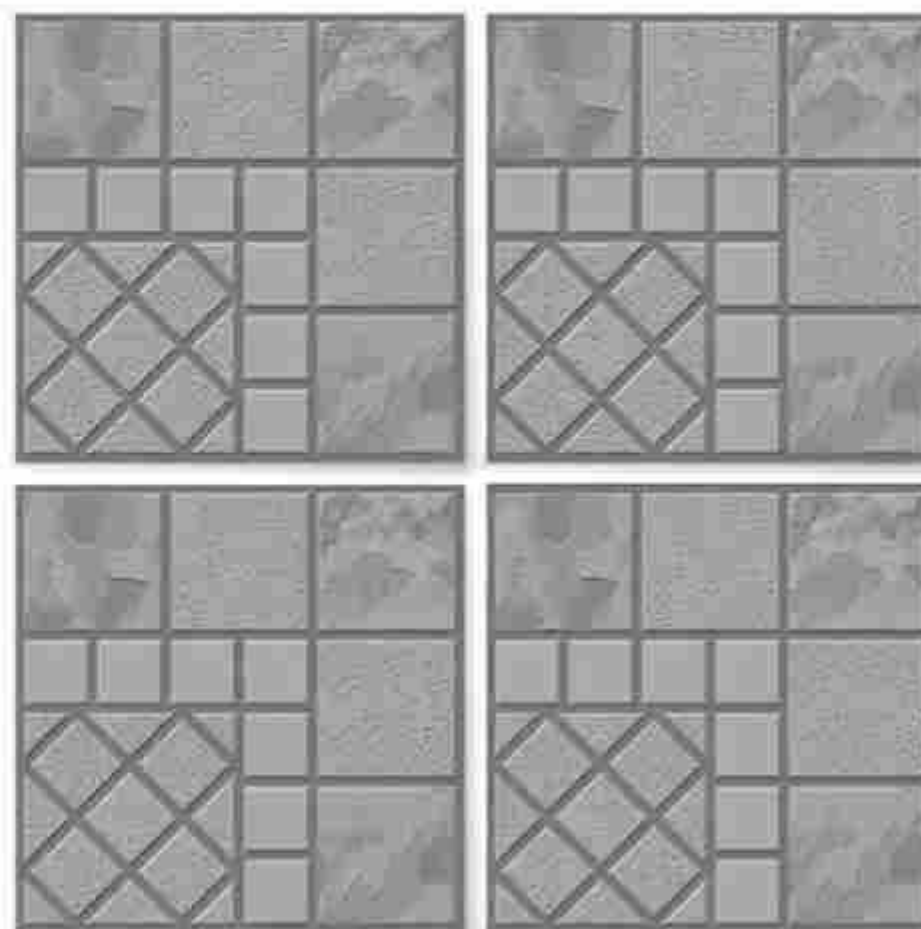

Applications





12101

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications







12102


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications






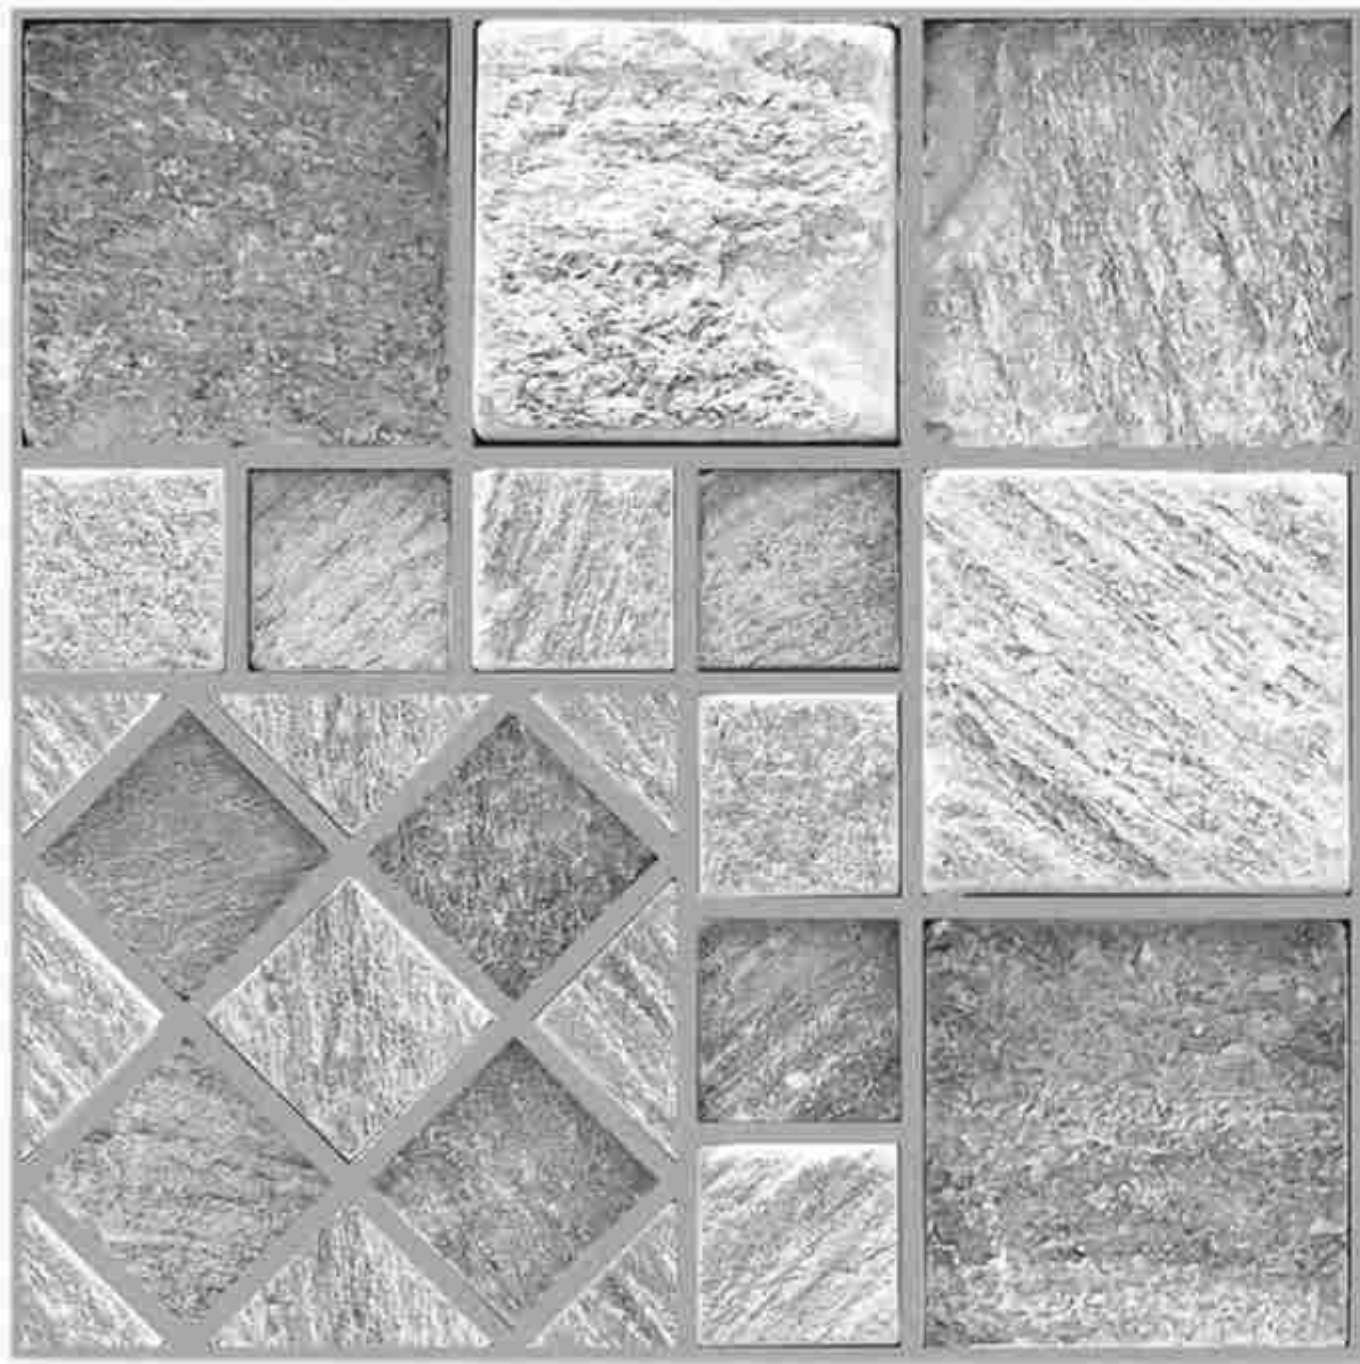

12103

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

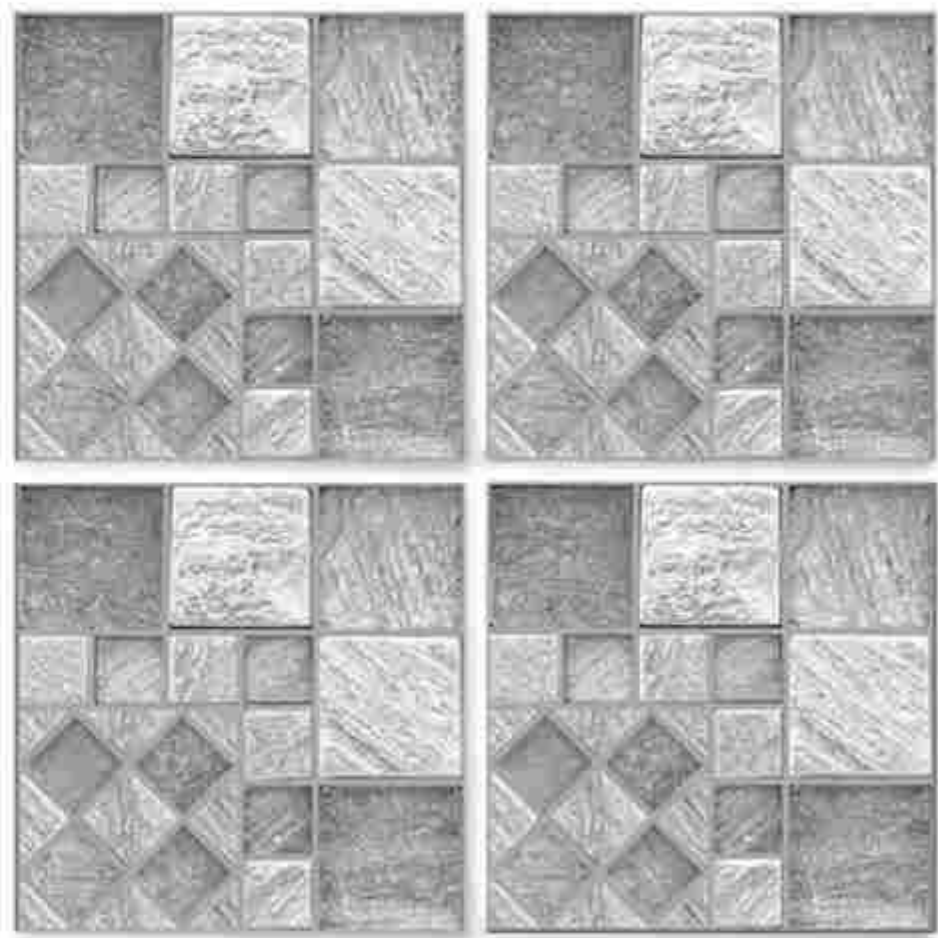

Applications








12104

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

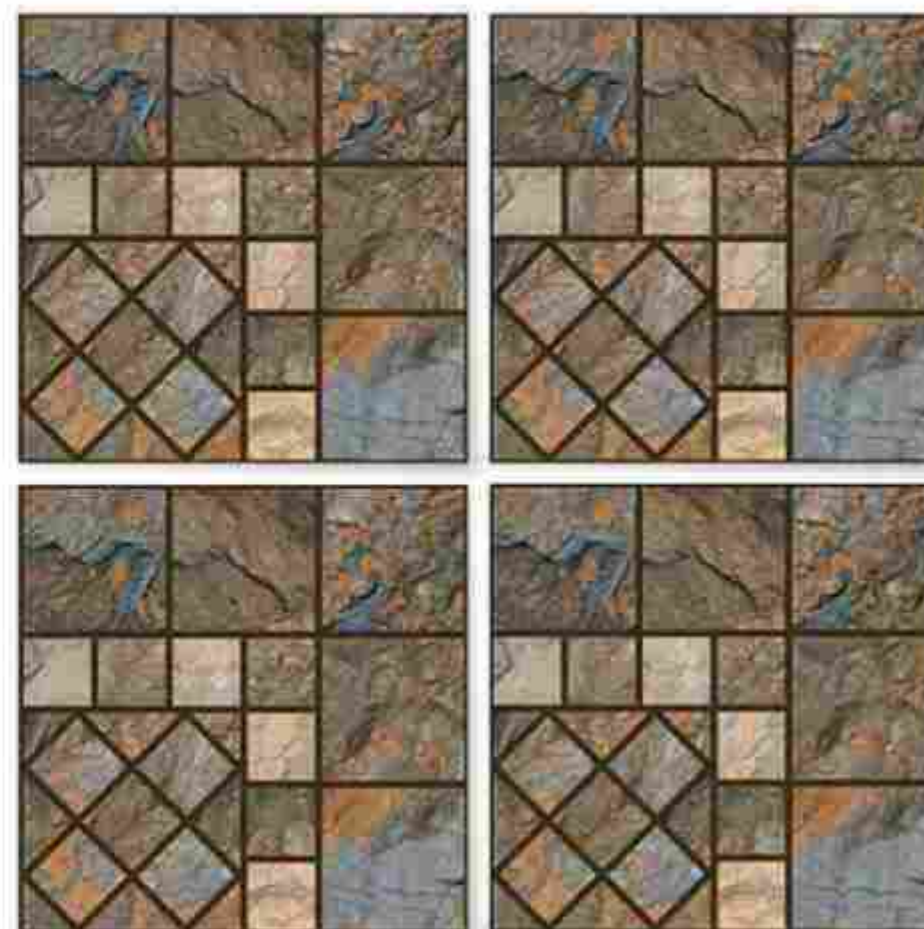

Applications








12105

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

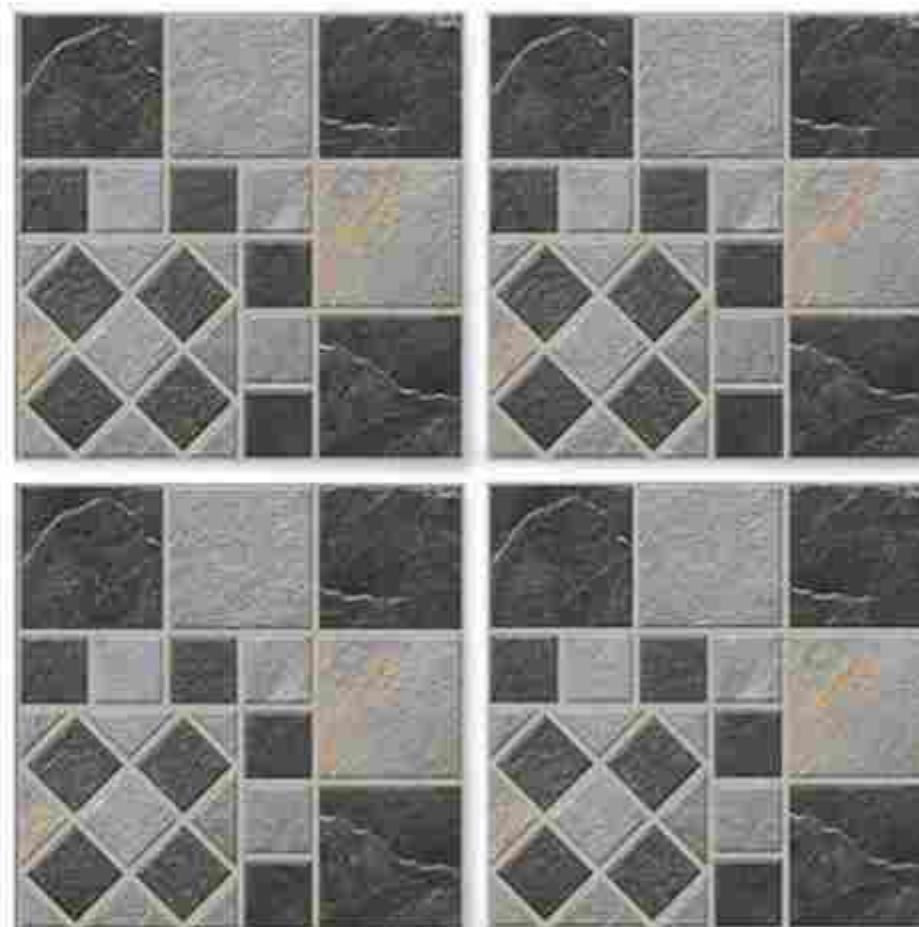

Applications








12106


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

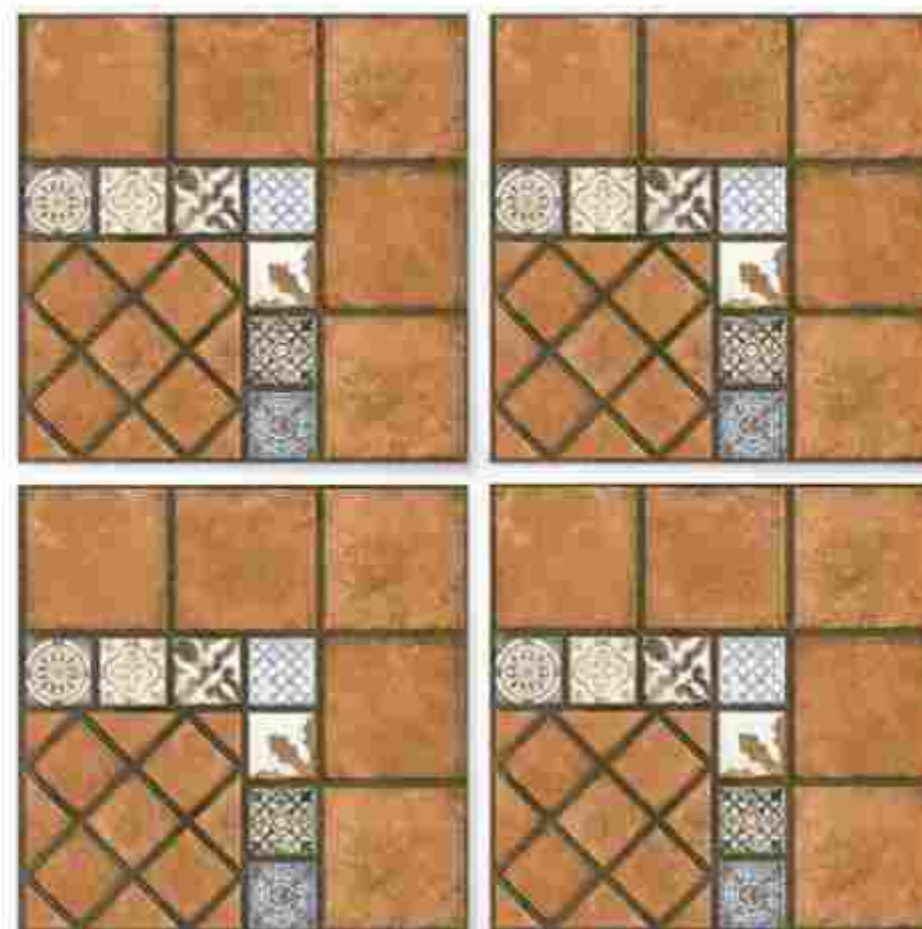

Applications





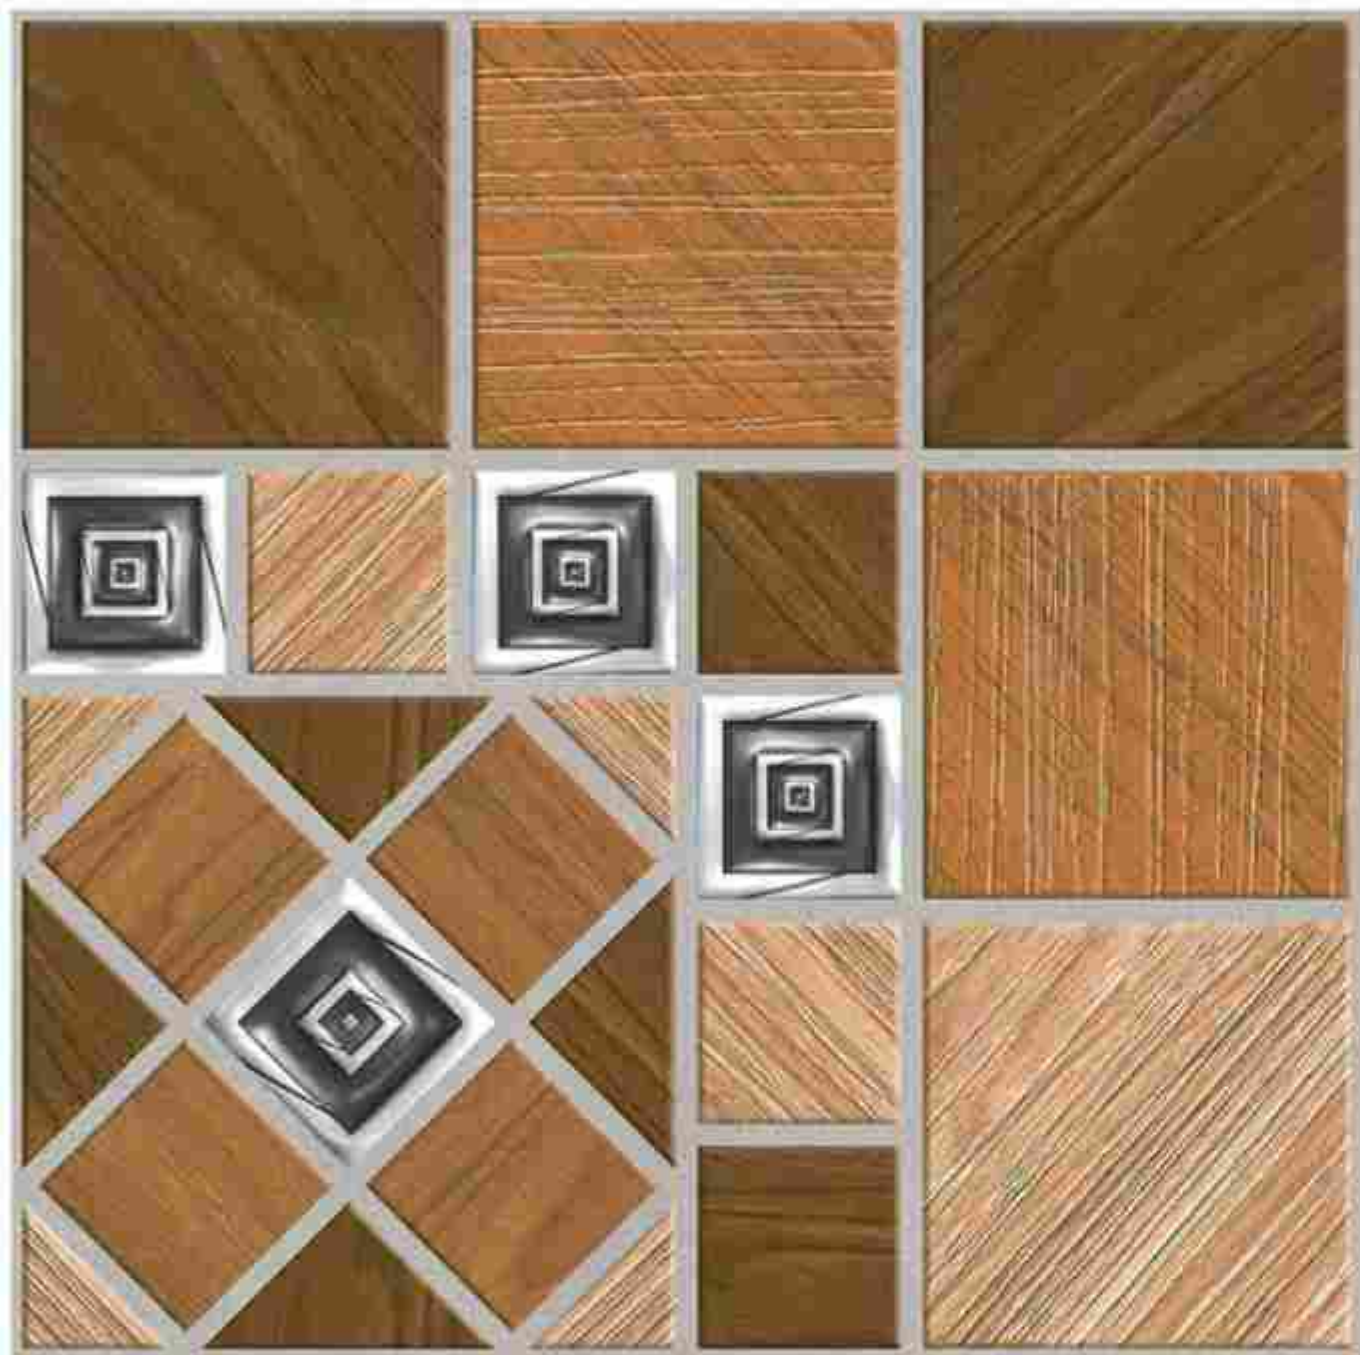


12107

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>



Applications




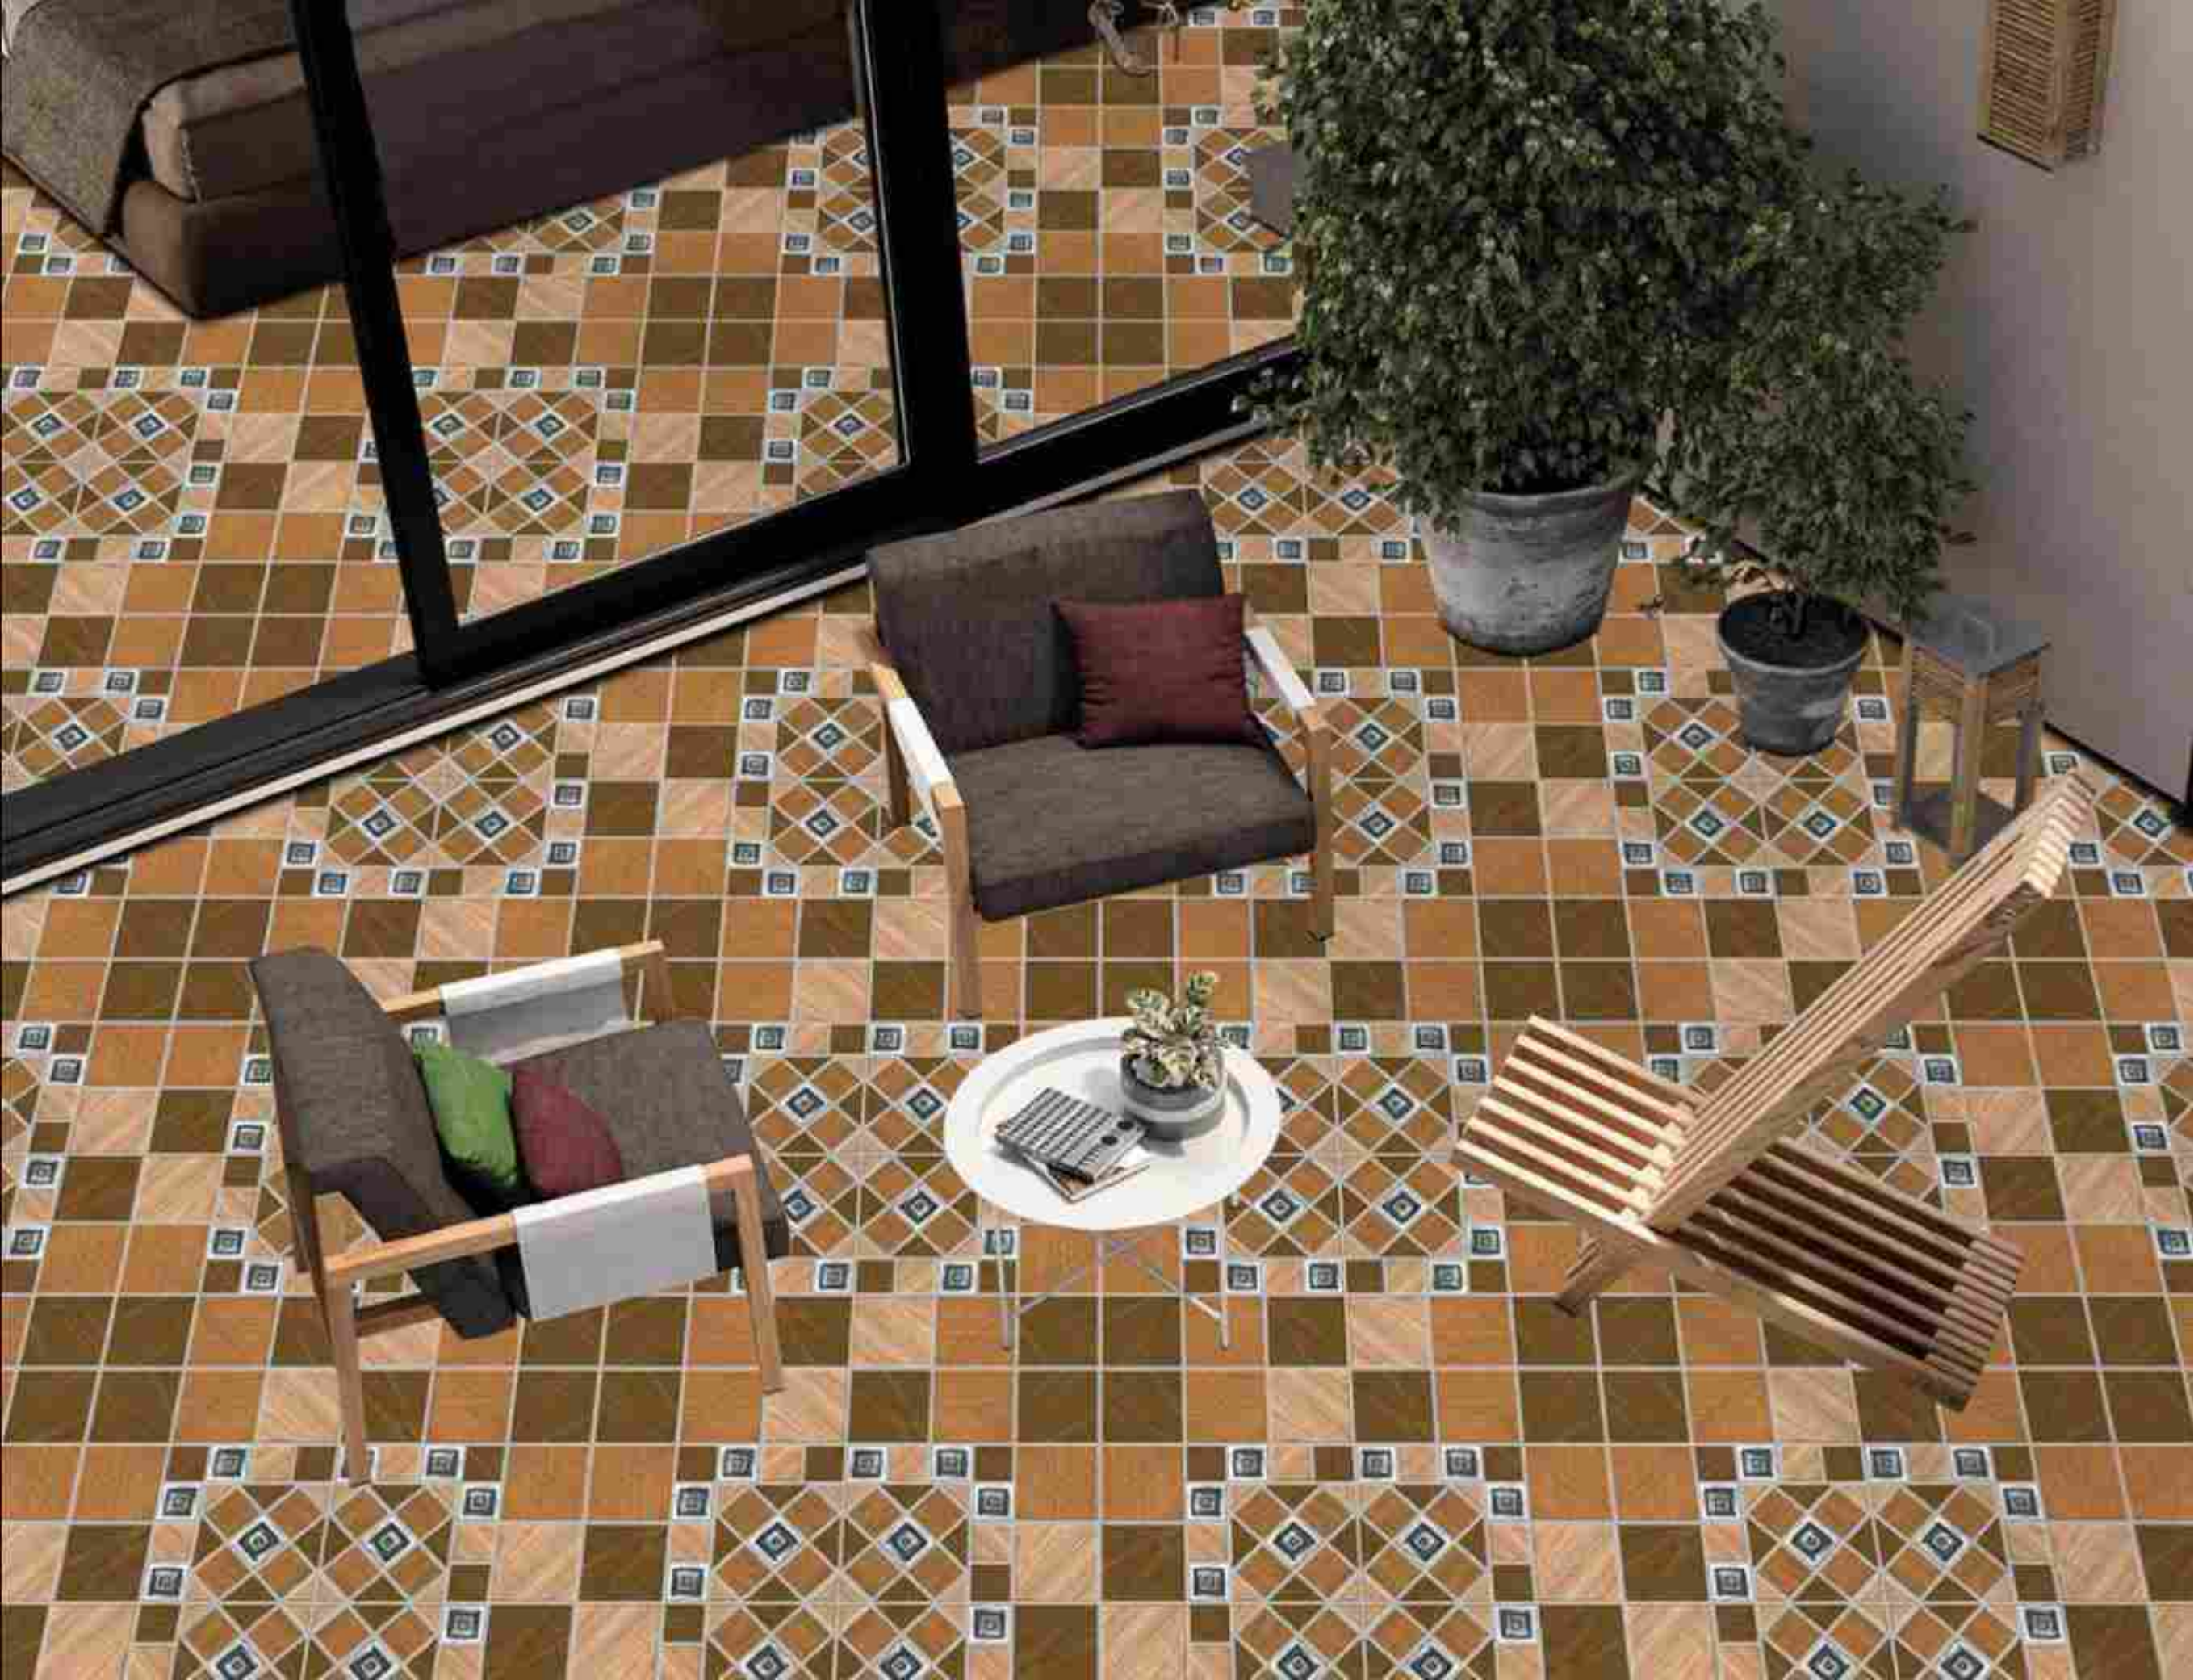



12108

Size	Finish	Thickness	Random
500x500 mm	Matt	12 mm	1

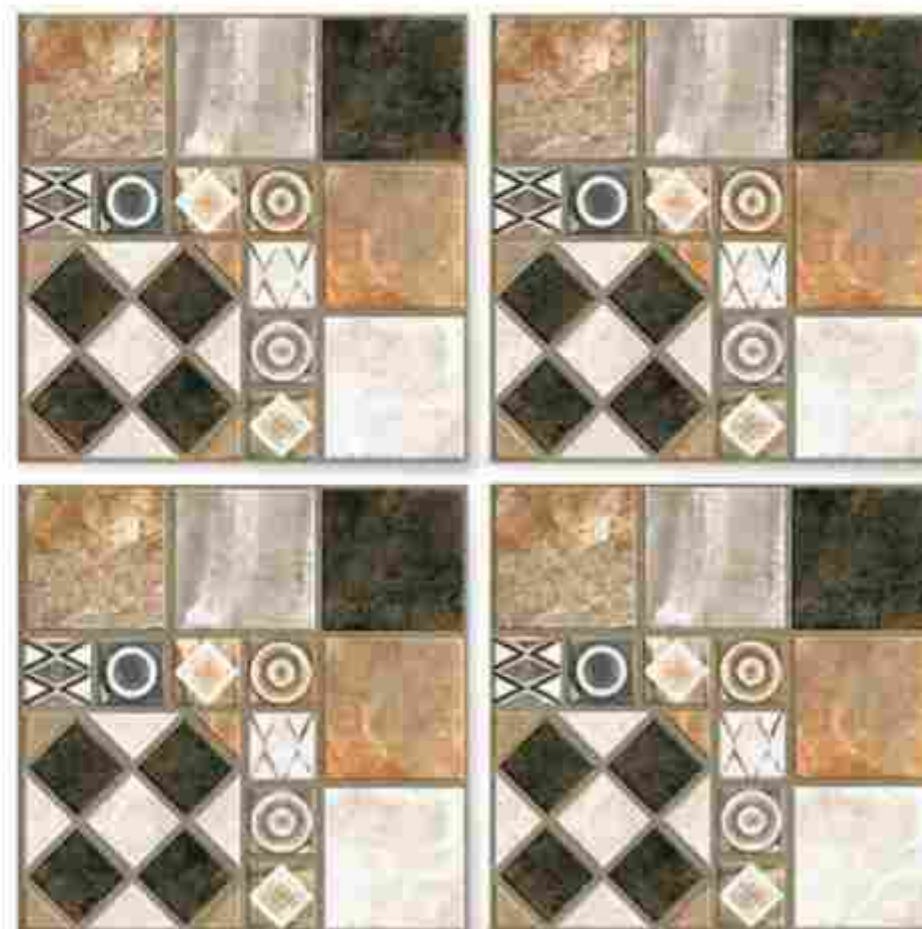

Applications








12109


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

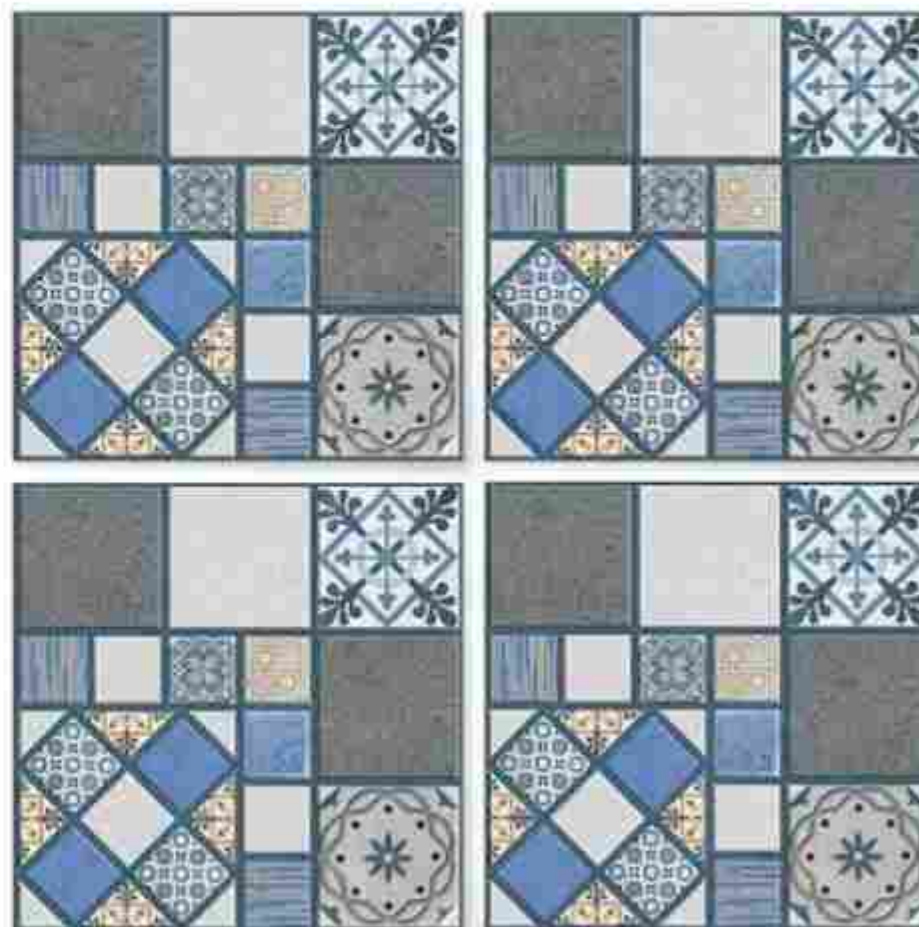

Applications






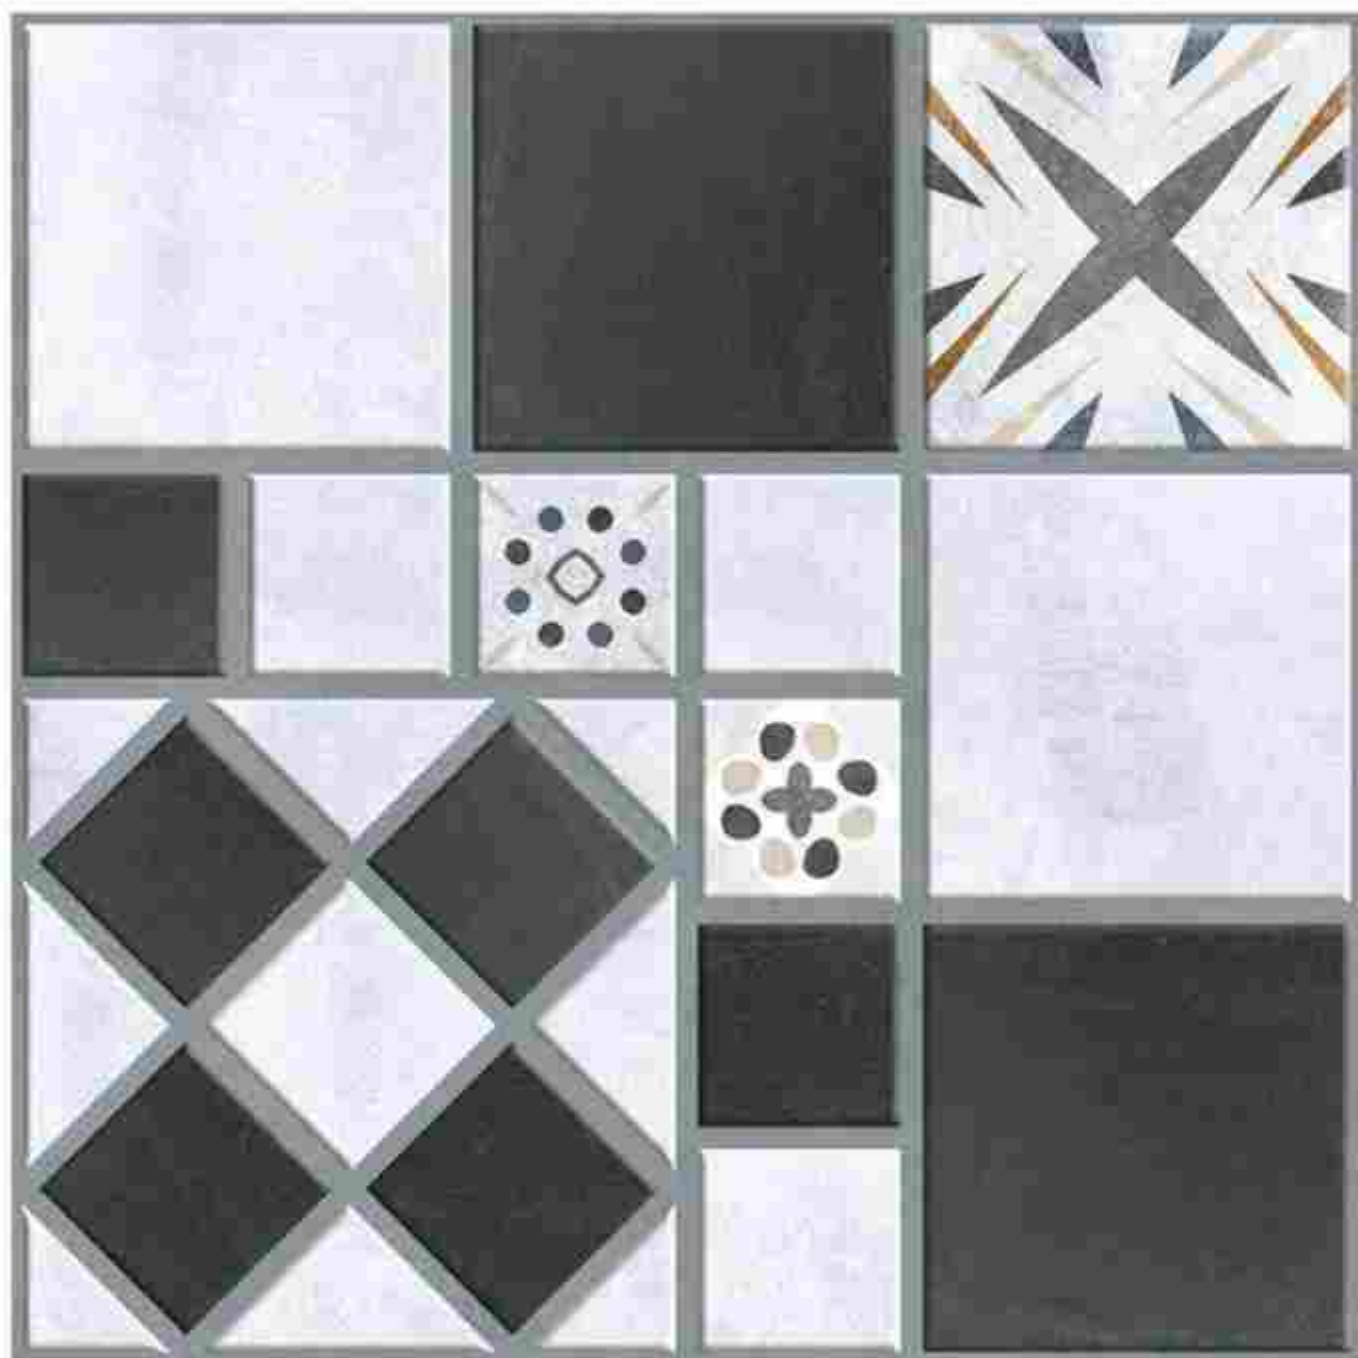

12110


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

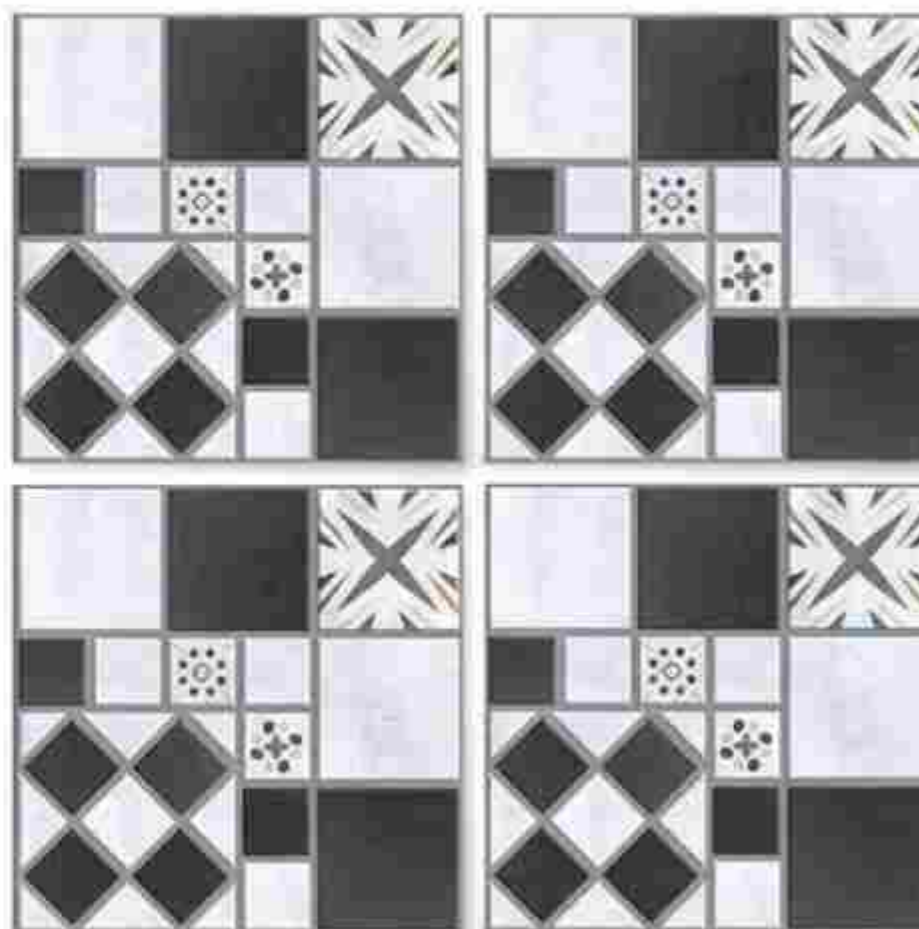

Applications






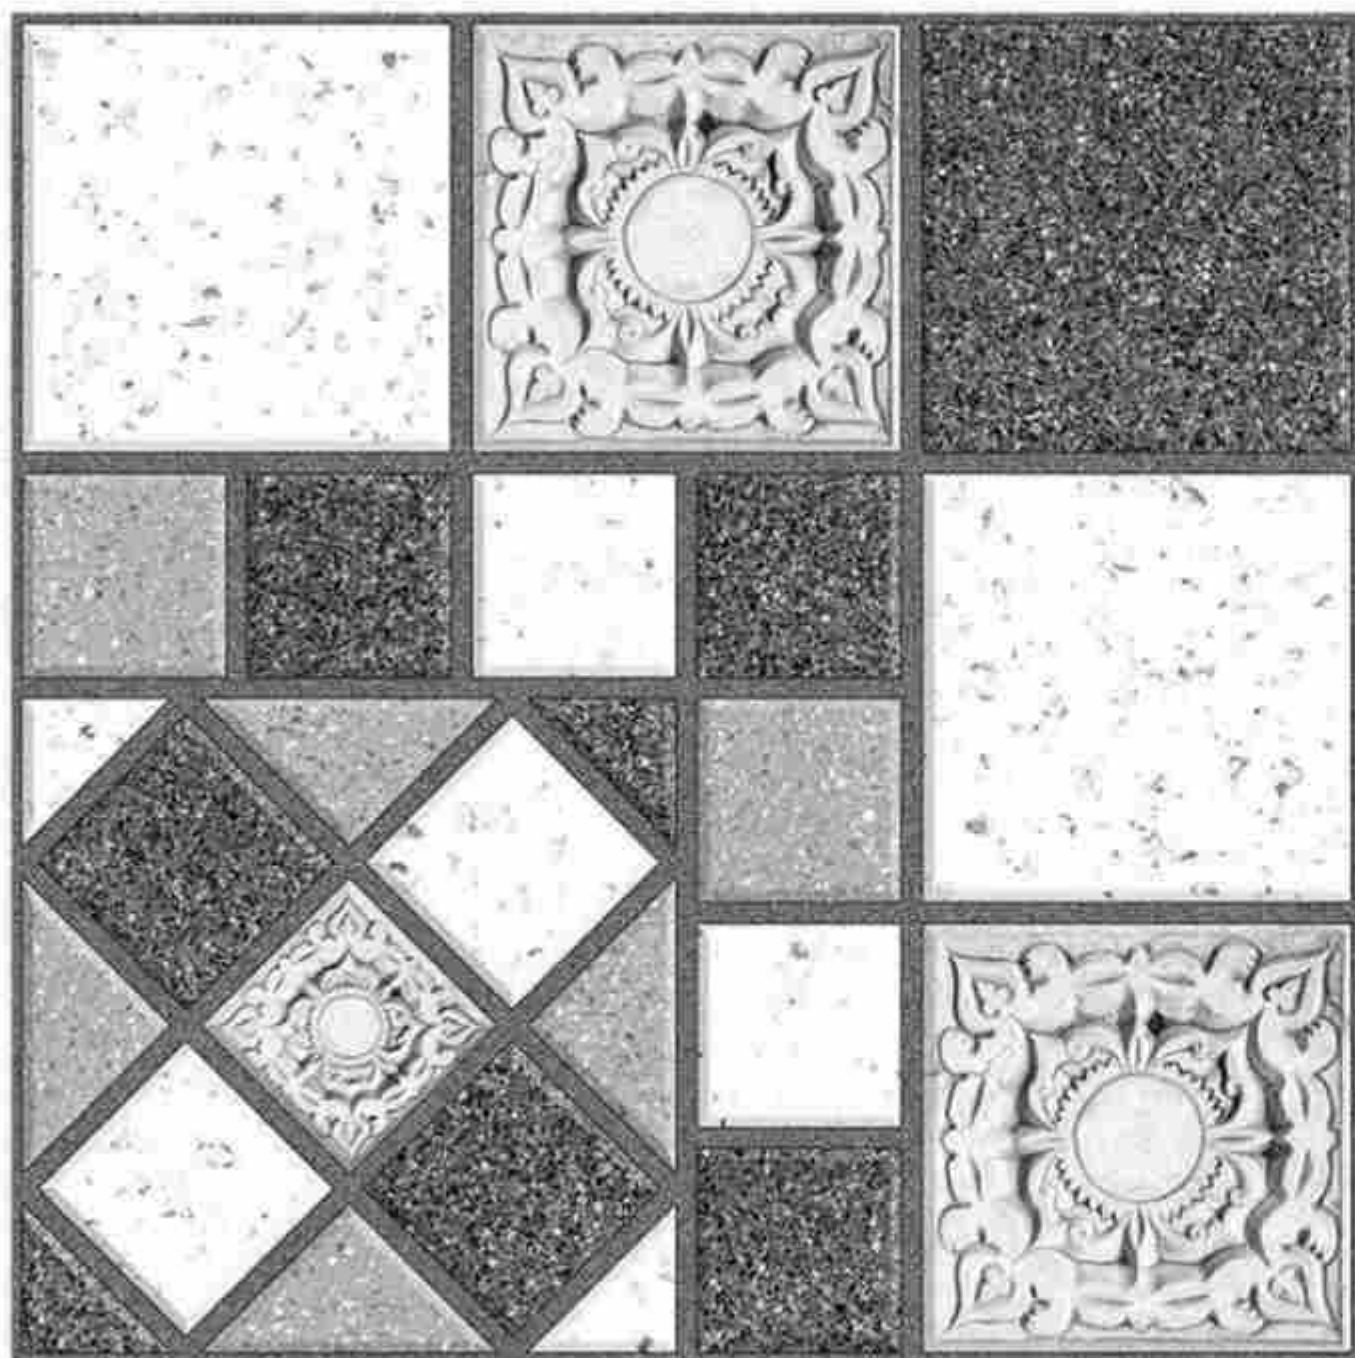

12111


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

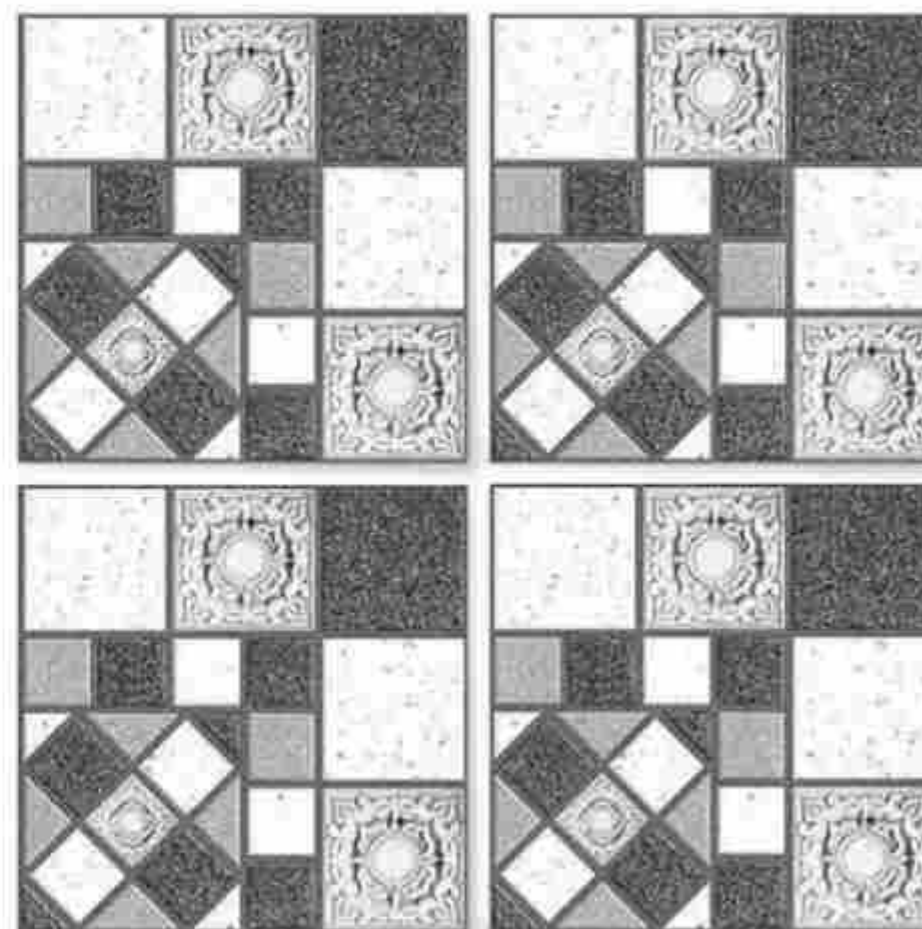

Applications






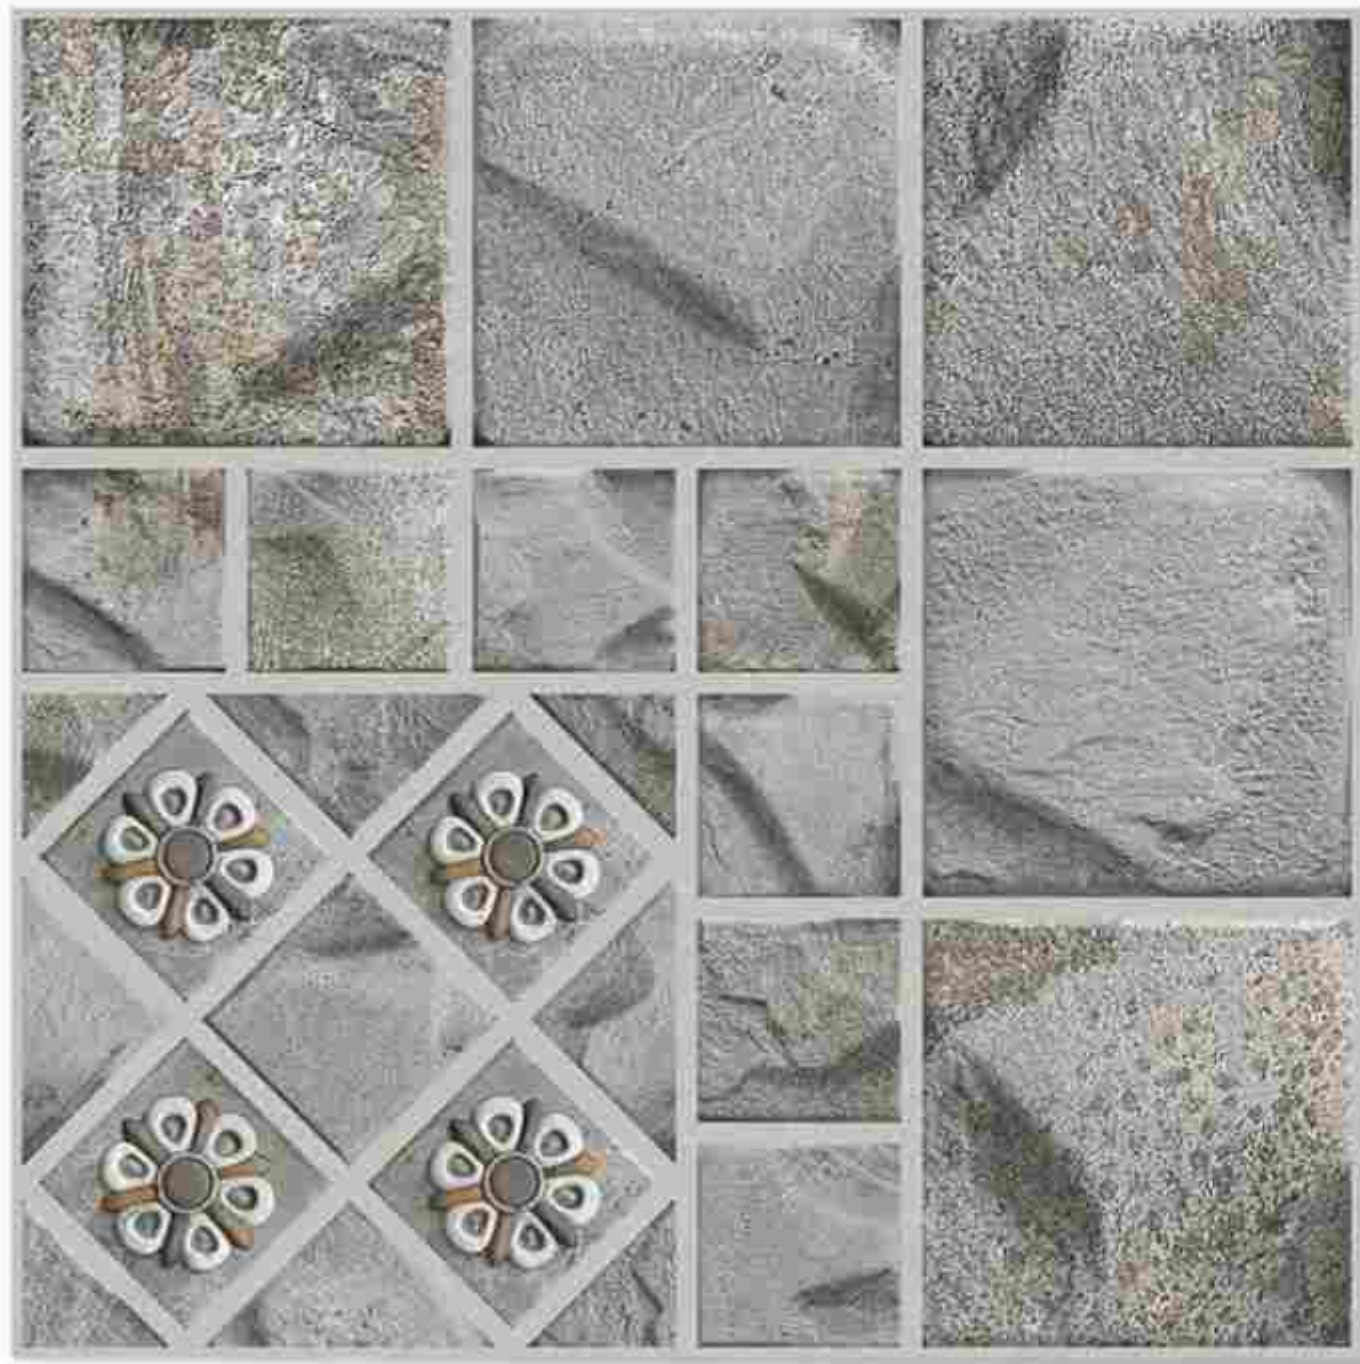

12112

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

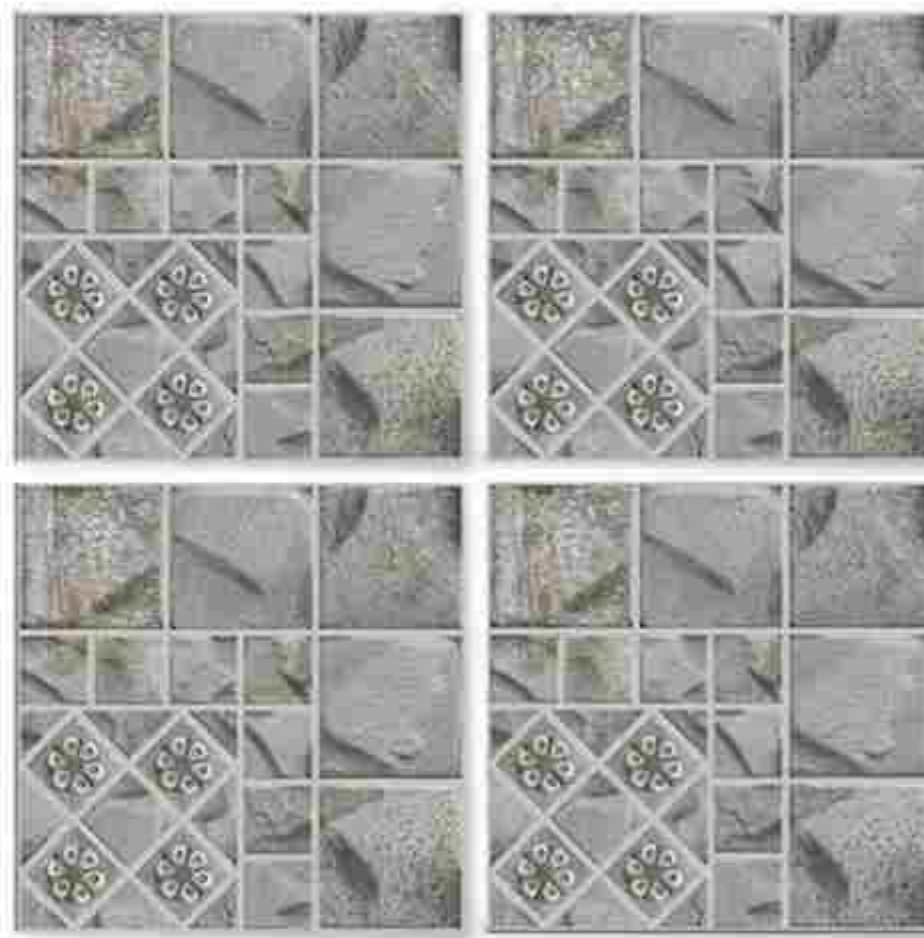

Applications








12113

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>1</u>

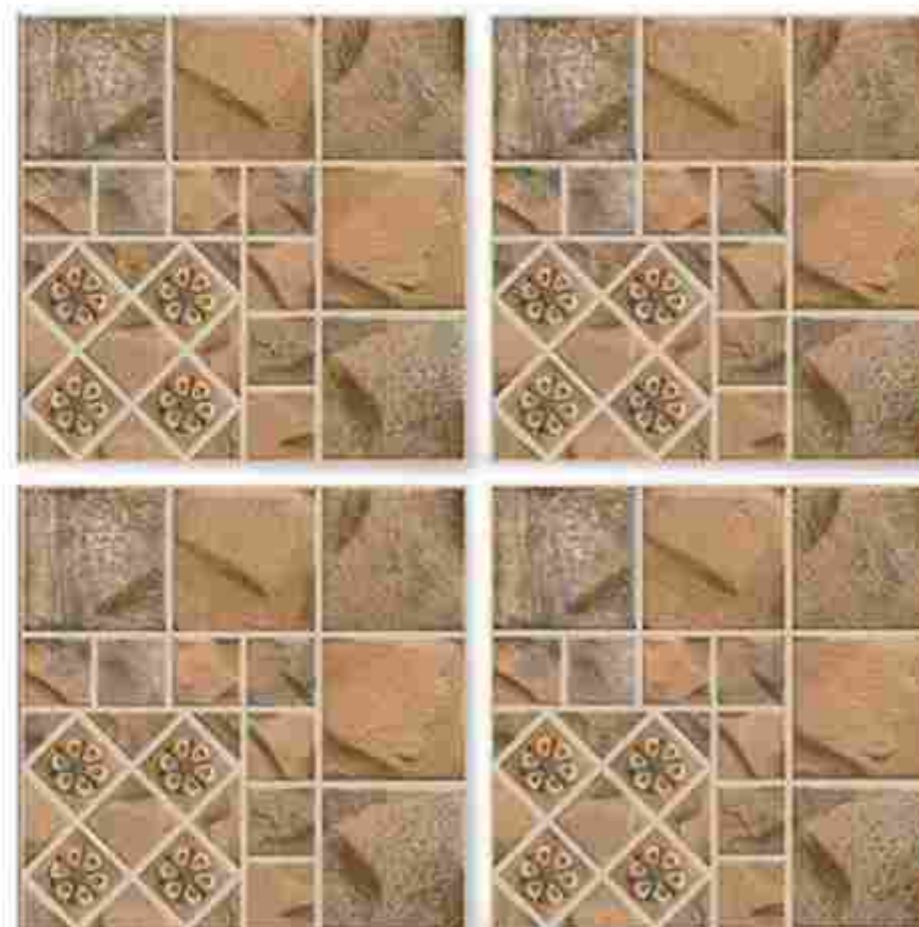

Applications







12114

Size	Finish	Thickness	Random
500x500 mm	Matt	12 mm	2



Applications









12115

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>2</u>

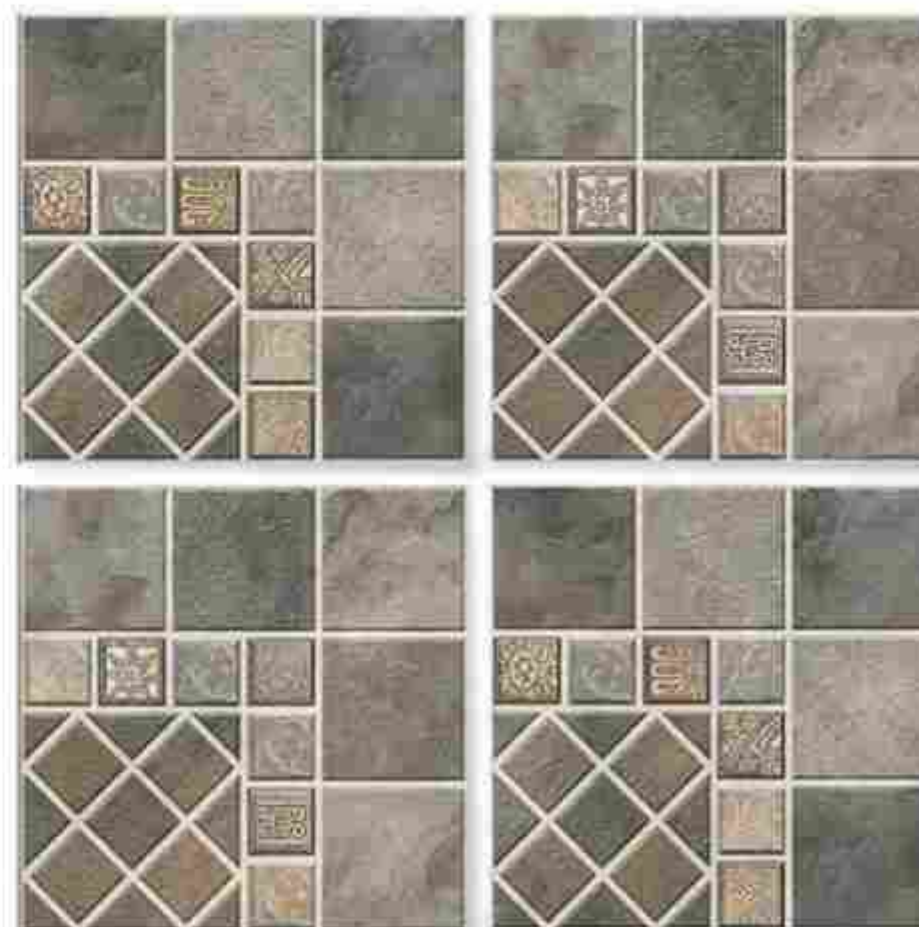

Applications



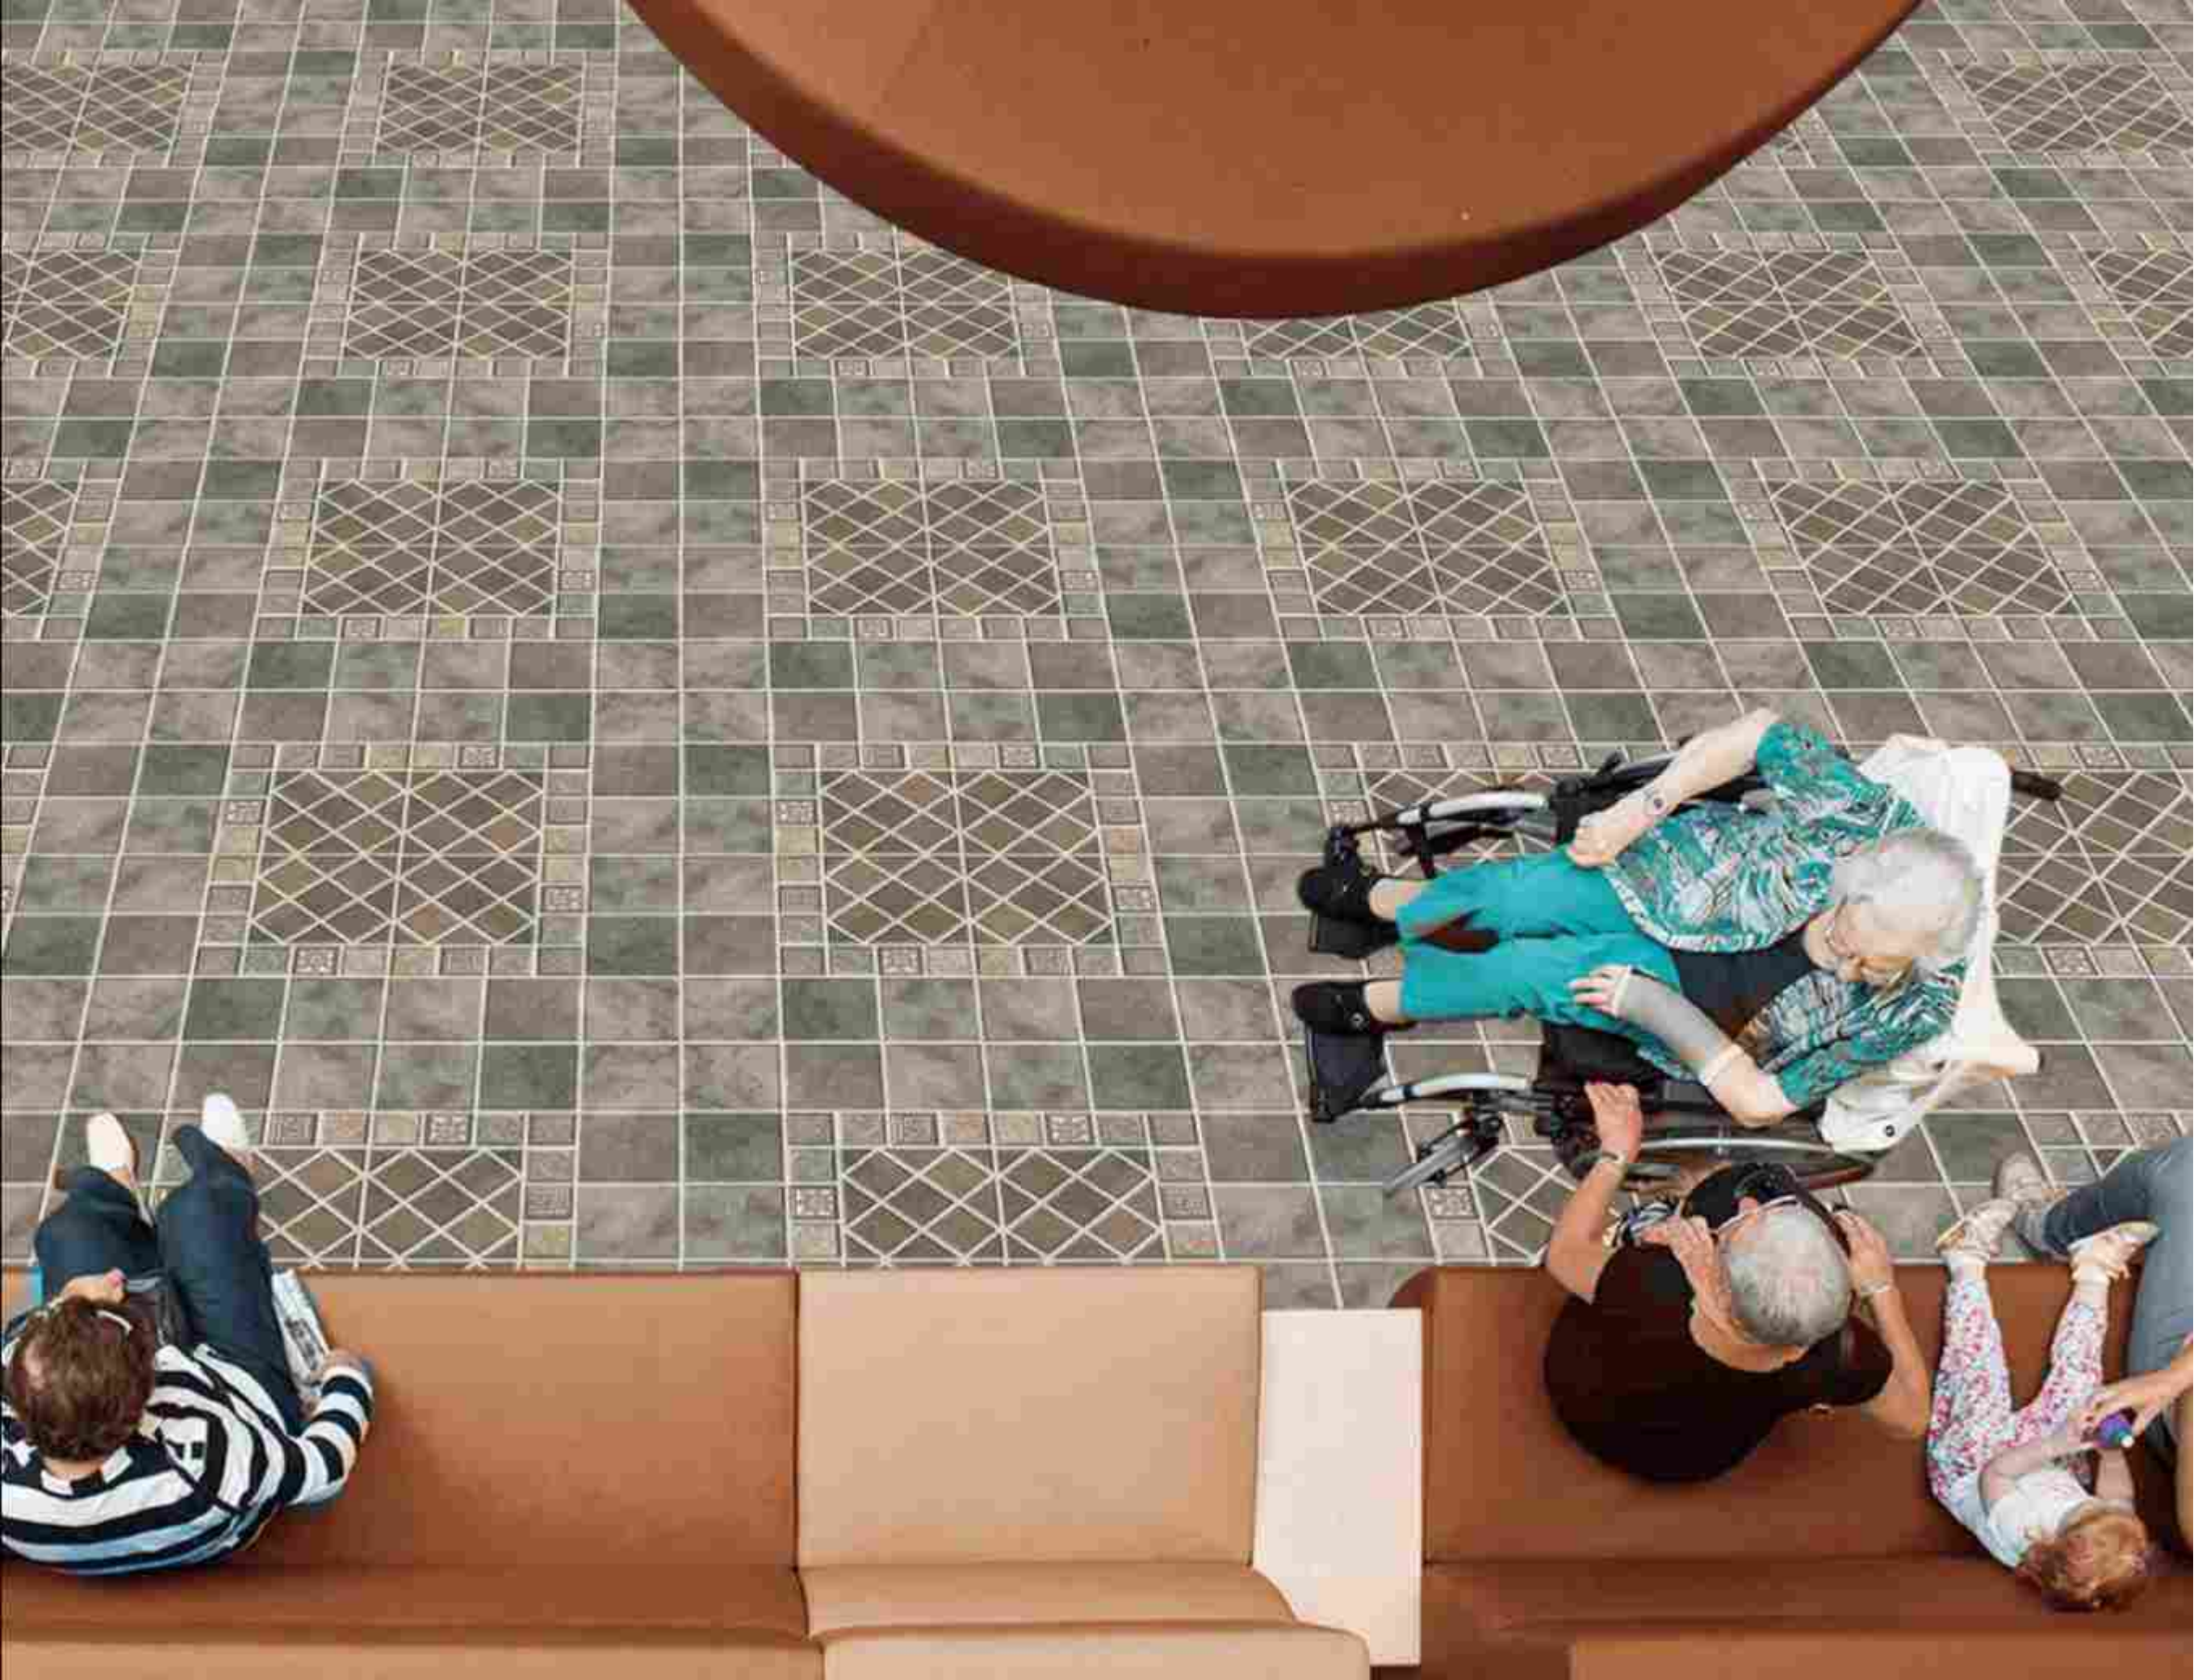



12116

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>2</u>



Applications







12117


Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>12 mm</u>	<u>2</u>



Applications






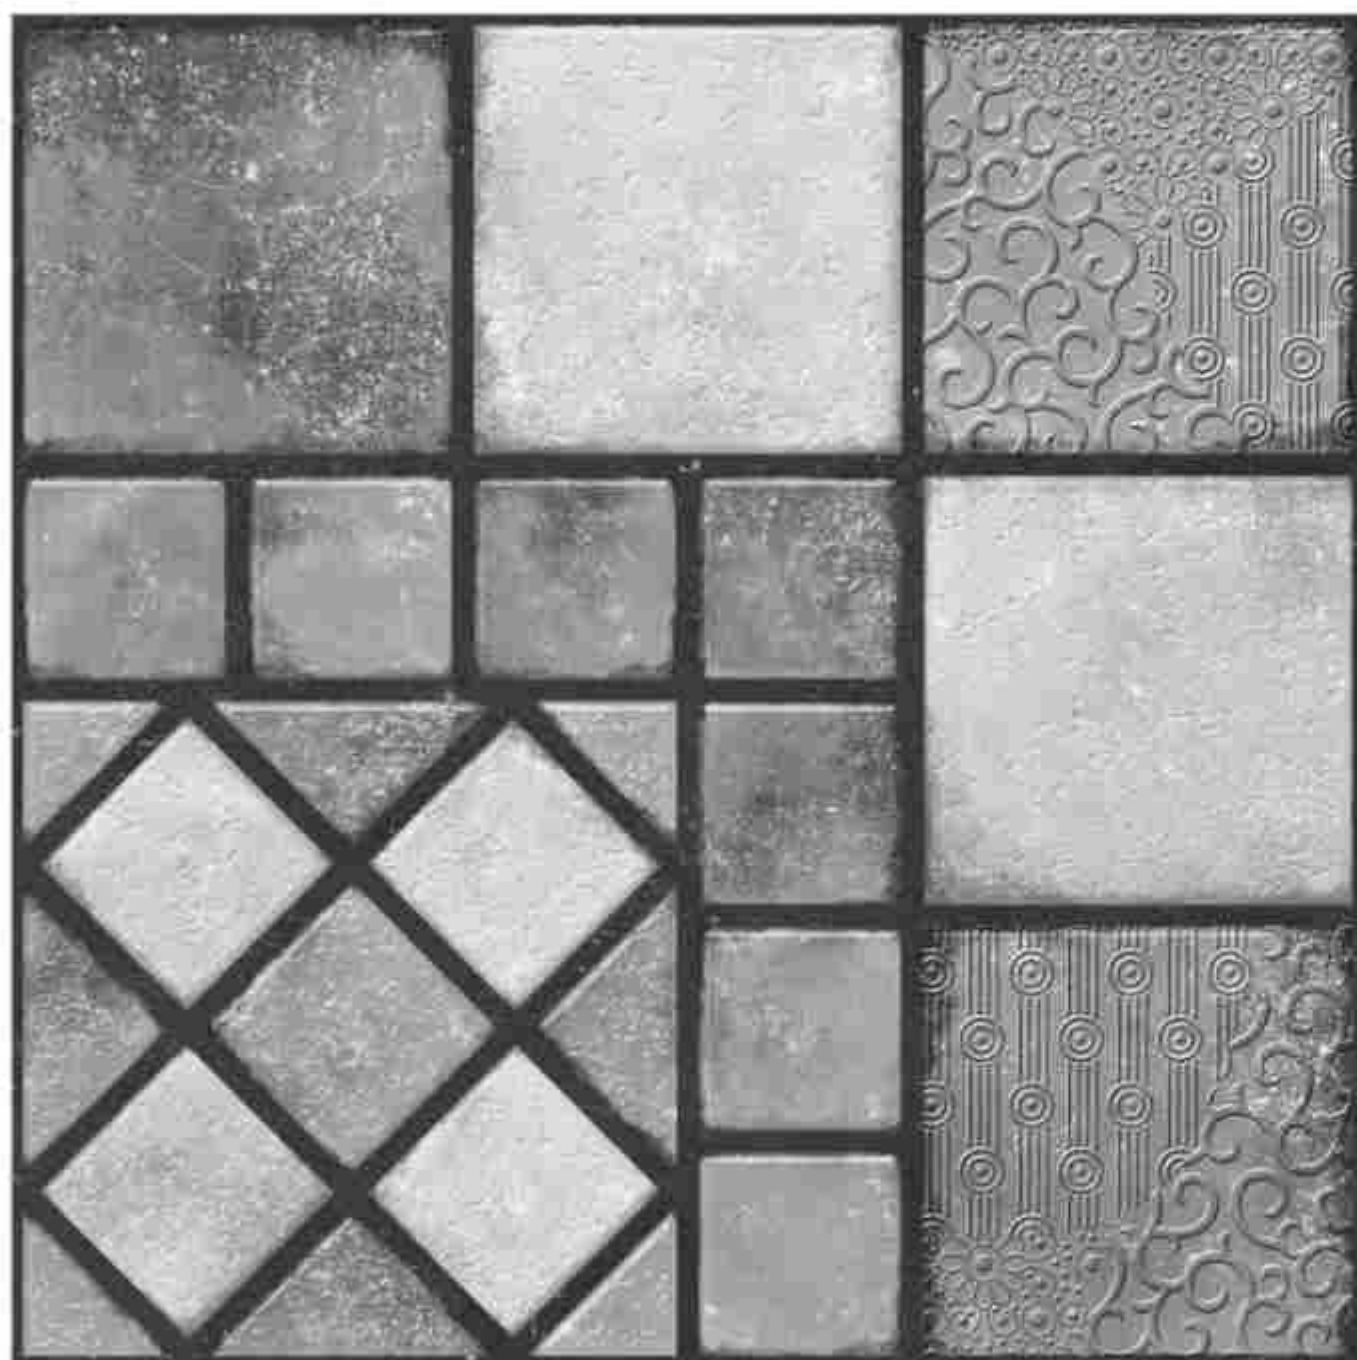

12118

Size	Finish	Thickness	Random
<u>500x500 mm</u>	<u>Matt</u>	<u>9 mm</u>	<u>1</u>

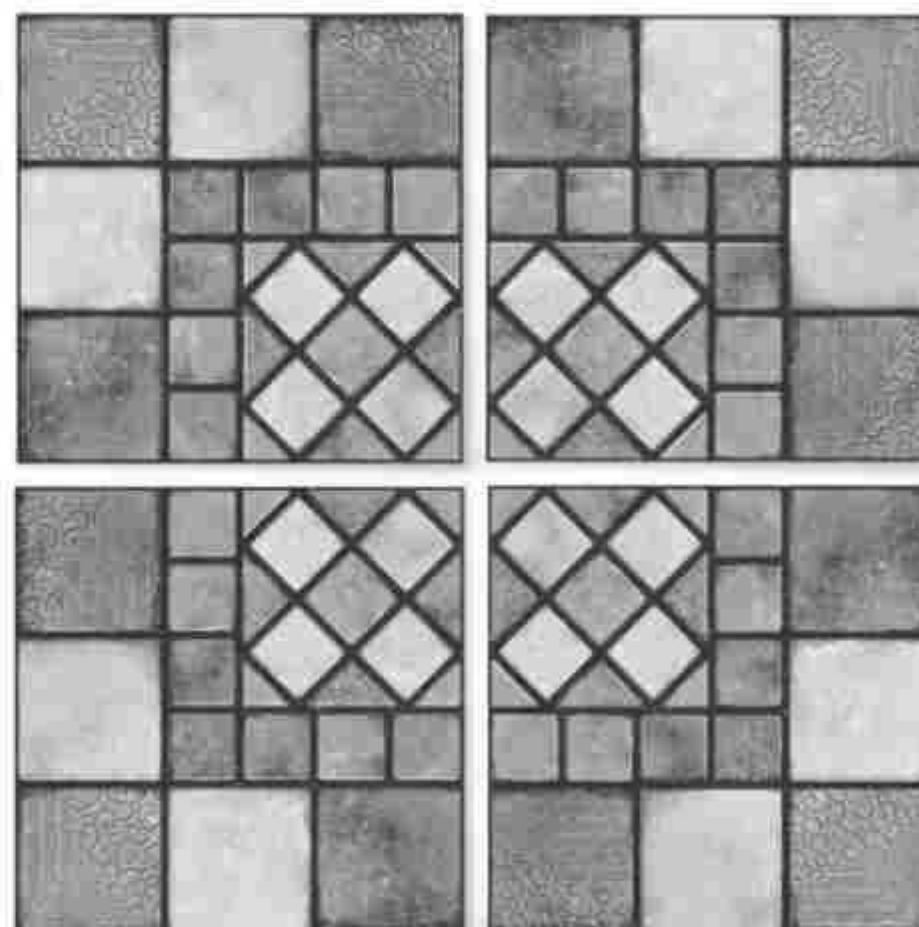

Applications








8003

Size	Finish	Thickness	Random
500x500 mm	Matt	12 mm	1

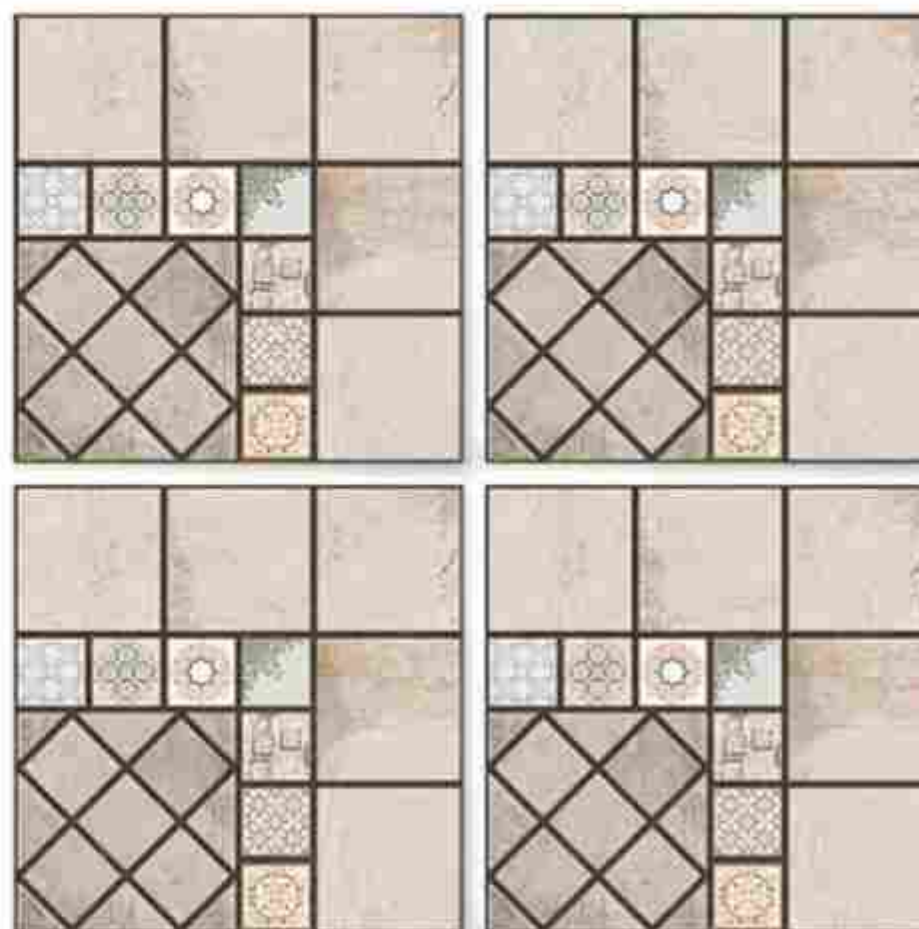

Applications








8004

Size	Finish	Thickness	Random
500x500 mm	Matt	12 mm	1

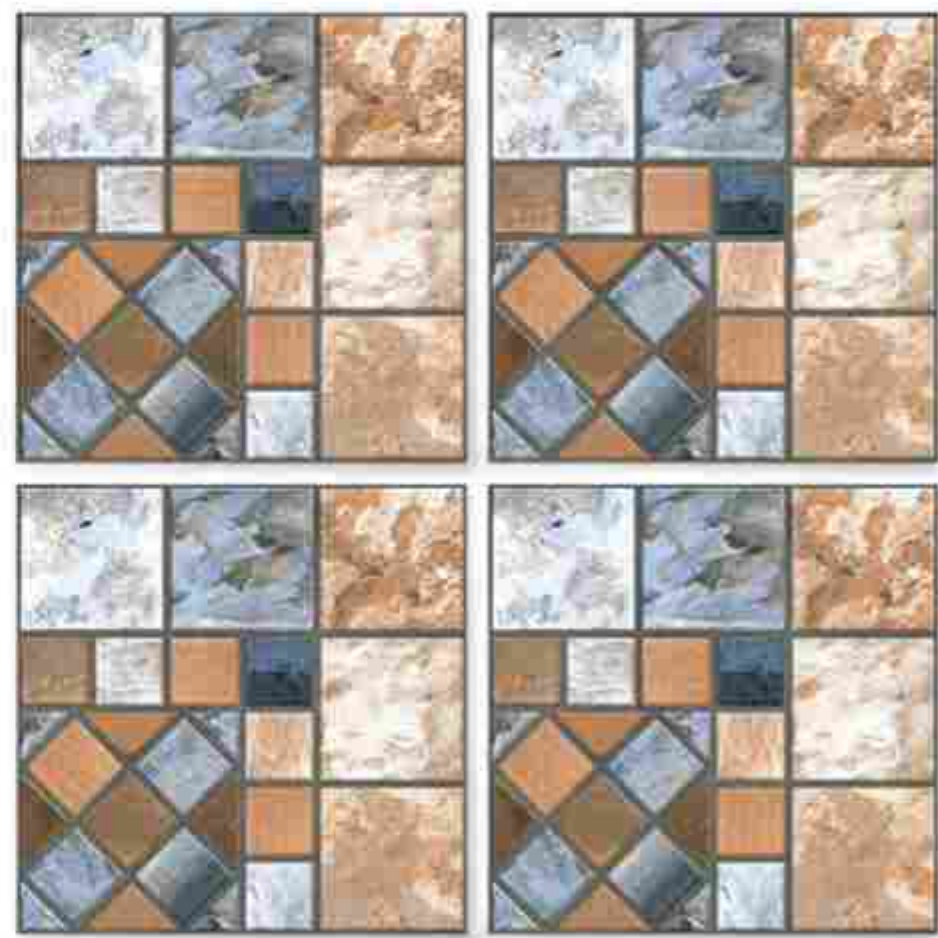

Applications





TECHNICAL SPECIFICATION

CHARACTERISTIC		International Std. ISO13006/EN 176 Group BIa	SAKETILES Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±5%	±4%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.3%	EN 98
6.	Water Absorption *	<0.5%	<0.3%	EN 99
7.	Mohs Hardness *	> 6	> 7	EN 101
8.	Flexural Straightness *	> 27 N/mm ²	> 47 N/mm ²	EN 100
9.	Abrasion Resistance	< 204 mm ³	< 98 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	> 1113 N	> 2830 N	ASTM C-648
12.	Density (g/cc)	> 2	> 2.4	DIN 51082
13.	Frost Resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10 ⁻⁶	< 6 x 10 ⁻⁶	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	—	Min. 65% - 70% reflection	Glossmeter

Sr.no.	Size	Thickness (Approx)	Tiles Per Box (Approx)	Coverage Area (sq.mtr) (Approx)	Weight (Approx)
1.	DIGITAL 500X500 MM	12 MM	3 PCS	0.76	16.5 Kgs

Thank you

